

SmartScan Hub (Conventionally Wired)

SS 17718

INSTALLATION DETAILS




SMARTSCAN HUB

- **CONNECTIONS:** 3 x 20mm dia. cable entries
- **FIXINGS:** 4 x Keyhole slots (4mm clearance)
- **VOLTAGE:** 230V
- **CURRENT RATING:** 5A
- **IP Rating:** IP 20
- **WEIGHT:** 1KG



CONNECTIONS

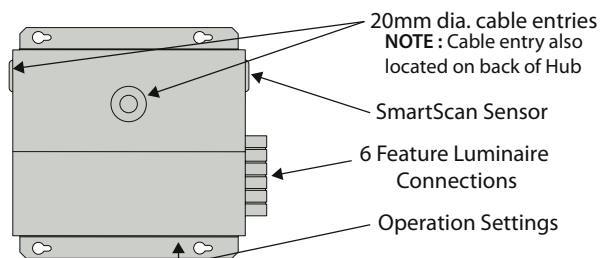


GENERAL

- The **SmartScan Hub** switches connected luminaires with the SmartScan luminaires when Motionline signals are received.
- The **SmartScan Hub** has an independent time delay - (30s -12hour).
- The **SmartScan Hub** can be set for security lighting, luminaires switch in reverse to the general lighting (switch feature lighting ON when the Smart luminaires switch OFF).
- The **SmartScan Hub** can also be used in conjunction with scene settings to listen to scene commands on the Motionline.
- Luminaires can be supplied fitted with a 1m lead and Splitter (**LCM 14822**) for connection to the **SmartScan Hub**. To specify add suffix (SHL) to luminaire catalogue number.



LCM 14822 - 1m

DIMENSIONS

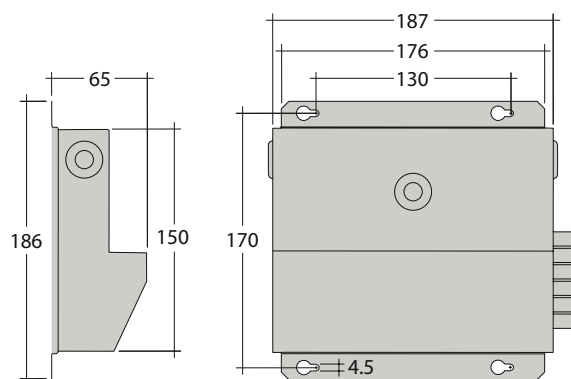

SETTINGS




To adjust the settings remove the label from the front of the SmartScan Hub
(Re-fit the label when adjustment completed)

TIME DELAY (For Connected Luminaires):

FACTORY DEFAULT: 5 = 10mins


0 = 30 secs	4 = 5 min	8 = 30 min	C = 3 hours
1 = 1 min	5 = 10 min	9 = 45 min	D = 4 hours
2 = 2 min	6 = 15 min	A = 1 hour	E = 12 hours
3 = 3 min	7 = 20 min	B = 2 hours	F = Not Used

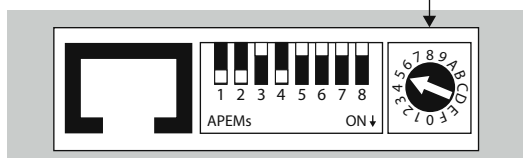

DIP SWITCH (For Connected Luminaires):


	Down	UP	Factory Default
1 = Scene 1	ON	OFF	ON
2 = Scene 2	ON	OFF	ON
3 = Scene 3	ON	OFF	OFF
4 = ECO	ON	OFF	ON

**5,6,7
NOT USED**

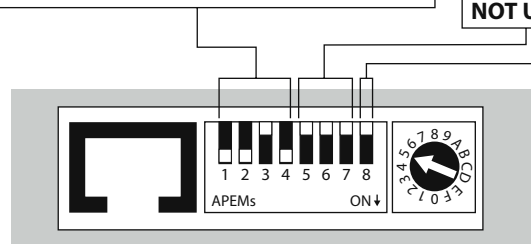


	Down	UP	Factory Default
8 = Security	ON	OFF	OFF

MAINS & MOTIONLINE

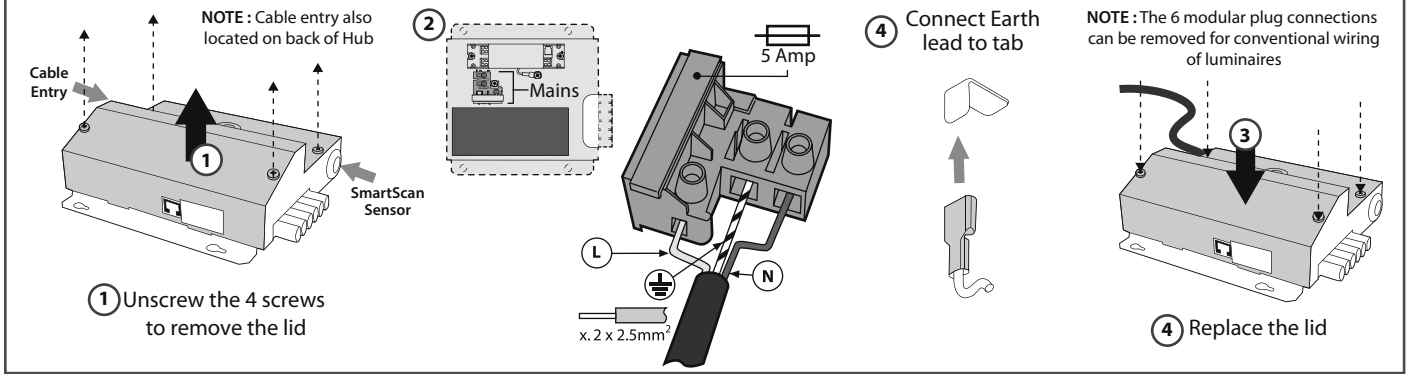

WIRING

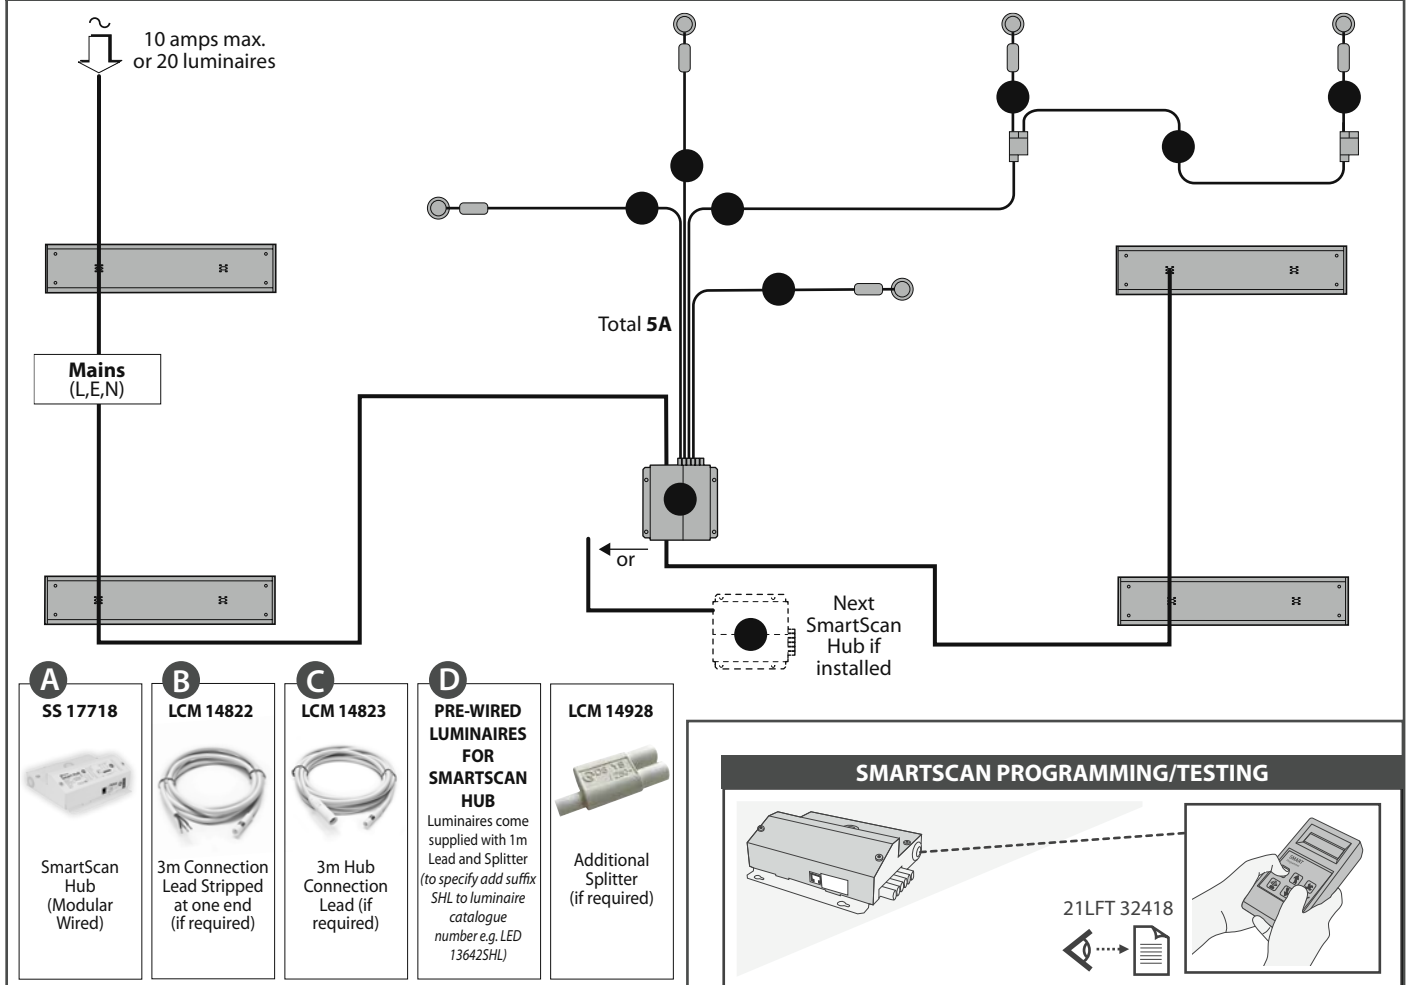

MODIFICATIONS

Thorlux products should not be modified. Any modification may render the product unsafe and will invalidate any Safety/Approval marks.

MAINTENANCE

The **SmartScan Hub** should not be subjected to undue mechanical shock or extremes of temperature. Clean only with a clean dry cloth.

GB - NOTICE TO CONTRACTOR - PLEASE PASS THIS LEAFLET TO THE END-USER.
 FR - A L'ATTENTION DE L'INSTALLATEUR - MERCI DE TRANSMETTRE CE DOCUMENT À L'UTILISATEUR.
 DE - HINWEIS AN DIE MONTAGEFIRMA - BITTE GEBEN SIE DIESE INFORMATION AN IHREN KUNDEN WEITER.
 IT - AVVISO PER CONTRATTOR - LA PREGHIAMO DI INFORMARE ILLUSTRATIVO ALLE UTENTE FINALE.
 SE - INFORMATION TILL ENTREPRENÖREN - VÄNLIGEN VIDAREBEFORDRA DETTA INFORMATIONSHÄFTE TILL SLUTANVÄNDAREN.
 ES - NOTA AL CONTRATISTA - POR FAVOR HAGA LLEGAR ESTE FOLLETO AL CLIENTE FINAL.
 NL - MEDEDELING VOOR DE AANNEMER: GEEF DEZE INFORMATIE DOOR AAN DE EIND GEBRUIKER.
 NO - NOTAT TIL ELEKTRIKER - VÆR VENNLIG Å GI DETTE SKRIV TIL SLUTTBRUKER.
 PL - INFORMACJA DLA MONTAŻYSTY - PROSZĘ PRZEKAZAĆ INSTRUKCJĘ MONTAŻOWĄ DLA ODBIORCY.



MERSE ROAD NORTH MOONS MOAT
 REDDITCH WORCS. B98 9HH ENGLAND
 e-mail: thorlux@thorlux.co.uk
 Web: www.thorlux.com
 ☎ +44 (0)1527 583200

Australia: www.thorlux.com.au ☎ +61 (0)2 9907 1261
 Deutschland: www.thorlux.de ☎ +49 (0)211 6956 0310
 Ireland: www.thorlux.ie ☎ +353 (0)1 460 4608
 UAE: www.thorlux.ae ☎ +971 (0)2 656 5842



FM 10913 EMS 532104