




ADJUSTABLE EMERGENCY 2 x 3.5W LED TWIN HEAD SPOTLIGHTS FOR OPEN AREAS

IP40 CE LED

SPECIFICATION

- Steel body finished silver (RAL 9006)
- Emergency, AutoTest and Scanlight AT versions
- Uses two 3.5W high power LEDs
- 3 hour, non-maintained operation
- Adjustable lamp heads
- Available with narrow (29°) or wide (63°) beam
- Suitable for wall or ceiling mounting

DIMENSIONS

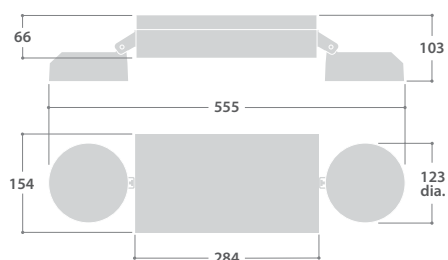


All dimensions in millimetres

RANGE

LED	NARROW BEAM VERSION	WIDE BEAM VERSION	DURATION	APPROX. kg	TYPE
Emergency 2 x 3.5W	ENI 16033	ENI 16034	3-Hour	3.7	Non-maintained
AutoTest / Scanlight AT 2 x 3.5W	TNI 16033 ▲	TNI 16034 ▲	3-Hour	3.7	Non-maintained


▲ Can be connected to Scanlight AT using DALI connections

PHOTOMETRIC GUIDE



NARROW BEAM

Luminaire Lumen Output
325lm per head



WIDE BEAM

Luminaire Lumen Output
345lm per head