



# LED SURFACE

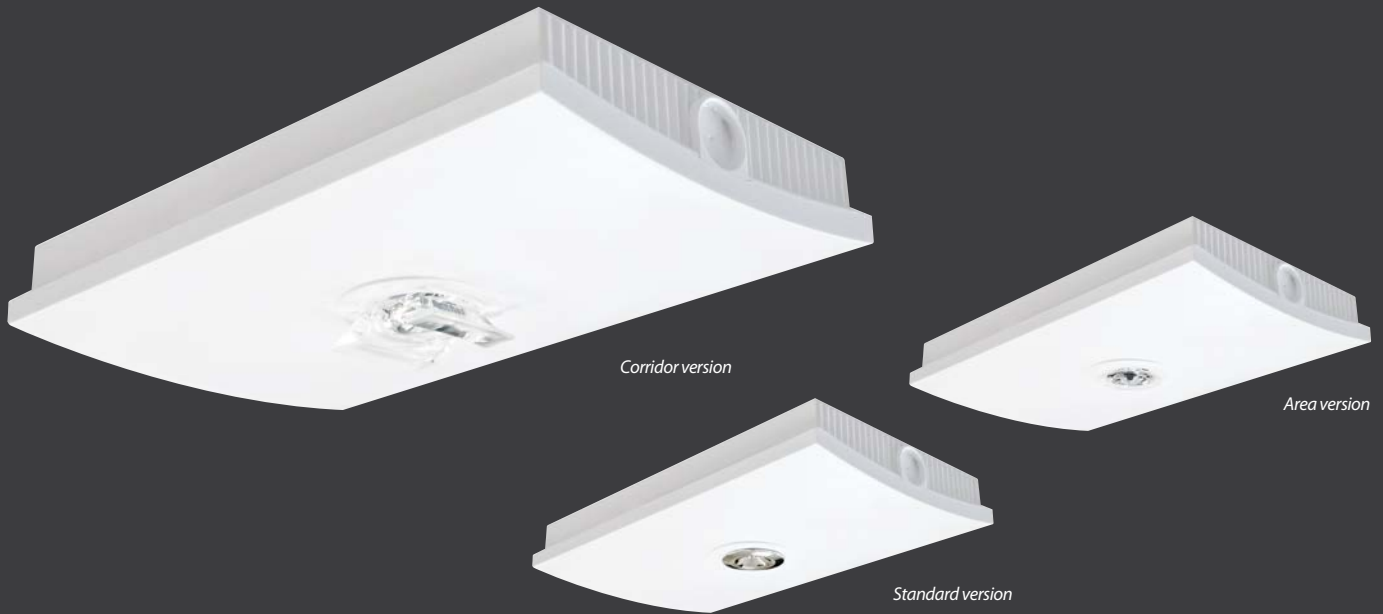


## RANGE

DISTRIBUTION	CAT. No.	APPROX. kg	TYPE
Corridor	<b>SLA 14153</b>	0.5	Non-maintained
Area	<b>SLA 14154</b>	0.5	Non-maintained
Standard	<b>SLA 14388</b>	0.5	Non-maintained

## DIMENSIONS

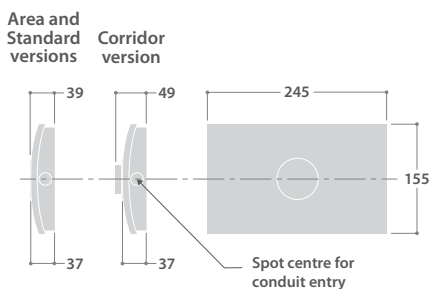

## SCANLIGHT AT LED EMERGENCY LUMINAIRES FOR SURFACE MOUNTING



### SPECIFICATION

- Body of white (RAL9016) fire-retardant polycarbonate
- Three hour, non-maintained emergency operation
- Stand-alone self-test and full communication Scanlight AT compatible
- Reliable LED technology
- Low power consumption (4W total)
- Status indicator shows operational condition
- Superb photometric performance
- Die-cast heat sink for long LED life

Luminaires used at Scanlight AT platforms 1 and 2 may self-test at any time. Consequently, caution should be exercised in situations where this may be inconvenient (such as hotel rooms or hospital wards). Scanlight AT platform 3 has inhibit features.

Photometric Performance - see Scanlight LED Downlighters

Web link: [Scanlight LED Downlighters](#) >