



LED EMERGENCY EXIT SIGNS




SPECIFICATION

- Steel body finished matt silver with acrylic legend panel
- Uses 8 low power consumption long life LEDs (4W total)
- Three hour, maintained emergency operation
- Stand-alone self-test and full communication Scanlight AT compatible
- Ceiling mounted or with optional kits for wall, cantilever and semi recessed mounting
- Semi recessed option. Bezel finished full polyester, non-yellowing white
- Choice of legends
- Status indicator shows operational condition




Ceiling mounting


DIMENSIONS

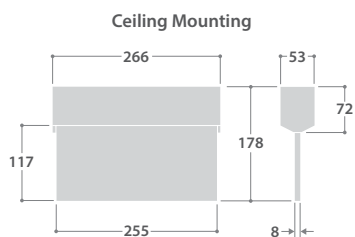


Cantilever Mounting

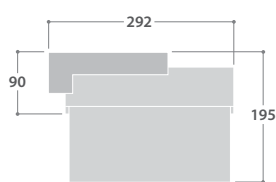

Wall Mounting



Semi Recessed

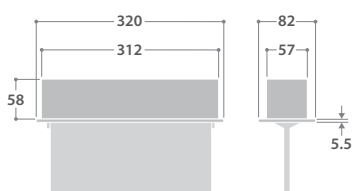


RANGE


ISO 7010 LEGEND	CAT. No	EURO LEGEND	CAT. No	APPROX. kg	TYPE
A	LEX 15240	F	LEX 13382	1.5	Maintained
B	LEX 15241	G	LEX 13383	1.5	Maintained
C	LEX 15242	H	LEX 13384	1.5	Maintained
D	LEX 15243	J	LEX 13385	1.5	Maintained
E	LEX 15244			1.5	Maintained

LEGEND OPTIONS

ISO 7010 Single Sided




EURO Single Sided



ISO 7010 Double Sided



EURO Double Sided



OPTIONAL MOUNTING KITS

DESCRIPTION	CAT. No.	APPROX. kg
Wall mounting kit	LEX 13391	0.2
Cantilever mounting kit	LEX 13392	0.2
Semi-recessed mounting kit	LEX 16831	0.6



Semi-recessed kit