

LED EMERGENCY EXIT SIGNS



SPECIFICATION

- Steel body finished matt silver with acrylic legend panel
- Uses 8 low power consumption long life LEDs (4W total)
- Three hour, maintained emergency operation
- Stand-alone self-test and full communication Scanlight AT compatible
- Ceiling mounted or with optional kits for wall and cantilever mounting
- Choice of legends
- Status indicator shows operational condition




Ceiling mounting


RANGE

| ISO 7010 LEGEND | CAT. No | EURO LEGEND | CAT. No | APPROX. kg | TYPE |
|-----------------|-----------|-------------|-----------|------------|------------|
| A | LEX 15240 | F | LEX 13382 | 1.5 | Maintained |
| B | LEX 15241 | G | LEX 13383 | 1.5 | Maintained |
| C | LEX 15242 | H | LEX 13384 | 1.5 | Maintained |
| D | LEX 15243 | J | LEX 13385 | 1.5 | Maintained |
| E | LEX 15244 | | | 1.5 | Maintained |

DIMENSIONS

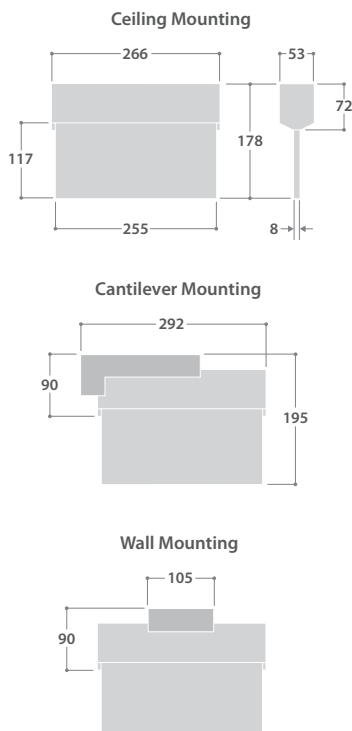

LEGEND OPTIONS

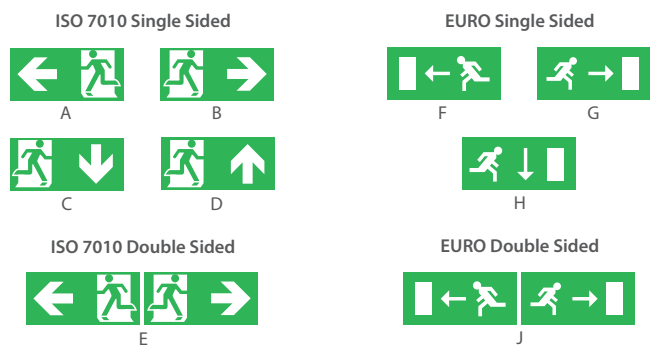

OPTIONAL MOUNTING KITS

| DESCRIPTION | CAT. No. | APPROX. kg |
|-------------------------|-----------|------------|
| Wall mounting kit | LEX 13391 | 0.2 |
| Cantilever mounting kit | LEX 13392 | 0.2 |