



## RANGE

ISO 7010 LEGEND	CAT. No	EURO LEGEND	CAT. No	APPROX. kg	TYPE
<b>Emergency</b>					
A	<b>ESE 15250</b>	E	<b>ESE 13621</b>	1.3	Maintained ▲
B	<b>ESE 15251</b>	F	<b>ESE 13622</b>	1.3	Maintained ▲
C	<b>ESE 15252</b>	G	<b>ESE 13623</b>	1.3	Maintained ▲
D	<b>ESE 15253</b>			1.3	Maintained ▲
<b>AutoTest/Scanlight AT</b>					
A	<b>TSE 15250 +</b>	E	<b>TSE 13621 +</b>	1.3	Maintained ▲
B	<b>TSE 15251 +</b>	F	<b>TSE 13622 +</b>	1.3	Maintained ▲
C	<b>TSE 15252 +</b>	G	<b>TSE 13623 +</b>	1.3	Maintained ▲
D	<b>TSE 15253 +</b>			1.3	Maintained ▲

+ Can be connected to Scanlight AT using DALI connections

▲ Wire link may be removed to enable non-maintained operation


## LED EXIT SIGNS



### SPECIFICATION

- Clear cover and off-white body in polycarbonate
- Three hour, maintained or non-maintained emergency operation
- Uses three 1W long life LEDs
- Emergency, AutoTest and Scanlight AT versions
- Stylish and robust
- Choice of legends

## LEGEND OPTIONS

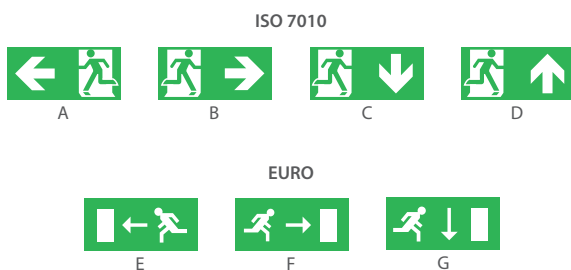

## DIMENSIONS

