




## LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	3000K to 6500K
RATED LIFE (HOURS)	60K - L80/B10
PROTECTION	LED PROTECT
DRIVER EFFICIENCY	>85%
REPLACEABLE	YES
POWER FACTOR	>0.9
LL/CW	68.3


For LED characteristics explanation see  
[www.thorlux.com/led-characteristics](http://www.thorlux.com/led-characteristics)

CIRCULAR RECESSED COLOUR  
TEMPERATURE CHANGING LED  
DOWNLIGHTERS

## SPECIFICATION

- High pressure die-cast ring finished full polyester, non-yellowing white
- Aluminium heat sink
- Injection moulded reflector finished white
- Optional reinforcing board with centre cut aperture
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit (CA versions)
- Supplied with remote gear unit fitted with 2m lead
- Fitted with 3000K and 6500K LEDs for colour temperature control

## DIMENSIONS

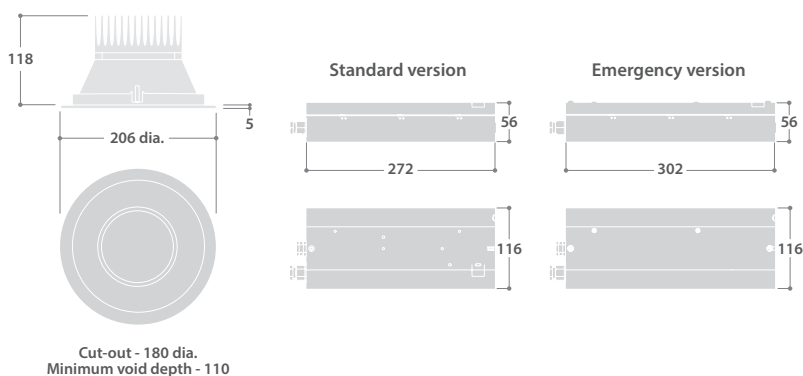

## ACCESSORIES

DESCRIPTION	CAT. No.	APPROX. kg
597 x 597mm ceiling reinforcing board (3mm thick plywood with 185mm diameter central cut-out)	GT 11970	0.55

## RANGE

## COLOURACTIVE LUMINAIRE - with integral wireless SmartScan Sensor

LED	CAT. No.	APPROX. kg
12W	GT 18822CA	1.5
24W	GT 18823CA	1.5

## COLOURCONTROL LUMINAIRE - for use with SmartScan Stand-alone Sensor

LED	CAT. No.	APPROX. kg
12W	GT 18824CC	1.5
24W	GT 18825CC	1.5

EMERGENCY VERSION - prefix catalogue number with:

EGT - Emergency / TGT - AutoTest / DGT - Scanlight AT (DALI) e.g. DGT18824CC etc.  
 Add 0.3kg to weights listed

NOTE: Emergency not available with ColourActive