

# JUNO B



## RANGE


LED	CAT. No.	APPROX. kg
30W	<b>JUN 17674L</b>	7.6
60W	<b>JUN 17675L</b>	7.6

CIRCUIT TYPE - L - non-dimming (LED)

## OPTIONS

DESCRIPTION	SUFFIX	EXAMPLE
Photocell	<b>PC</b>	<b>JUN 17674PC</b>

## DIMENSIONS



## LED POLE TOP AMENITY LUMINAIRES

IP66 IK10 CE LED WINDAGE - 0.04m<sup>2</sup>

### SPECIFICATION


- Die cast aluminium top and spigot adaptor finished full polyester RAL9006
- High impact UV stabilised polycarbonate cover rated IK10
- Integral high efficiency driver
- Extremely efficient and long system life up to 100,000 hours
- Pole top 76mm as standard (60mm to special order)
- Fitted with 6m flying lead
- Photocell option
- Zero upward light
- Fitted with 4000K LEDs

## LED CHARACTERISTICS

Ra	°K	L70/B10	LL/CW
70	4000	100K	
P/U	%	R/Rx	116.9
P	>88	R	
		PF	>0.95

For LED characteristics explanation see [www.thorlux.com/led-characteristics](http://www.thorlux.com/led-characteristics)

## PHOTOMETRIC GUIDE

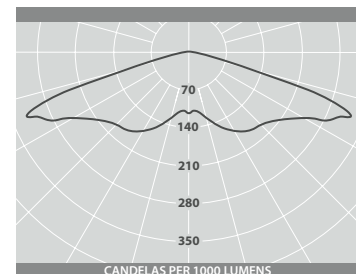

Luminaire Lumen Output:  
30W = 3975lm  
60W = 7340lm