



Smart External version



LED AREA FLOODLIGHTS



WINDAGE - 0.06m²

SPECIFICATION


- Die cast aluminium top and spigot adaptor finished full polyester RAL9006
- High impact UV stabilised polycarbonate cover rated IK10
- Integral high efficiency driver
- Extremely efficient and long system life up to 100,000 hours
- Pole top 76mm as standard (60mm to special order)
- Fitted with 6m flying lead
- Smart External versions with intelligent lighting control for use up to 6 metres mounting height
- Optional SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit.
- Photocell option
- Zero upward light
- Fitted with 4000K LEDs

LED CHARACTERISTICS

Ra	°K	L70/B10	LL/CW
70	4000	100K	
P/U	%	R/Rx	104.3
P	>85	R	
	PF		
	>0.95		

For LED characteristics explanation see www.thorlux.com/led-characteristics

PHOTOMETRIC GUIDE

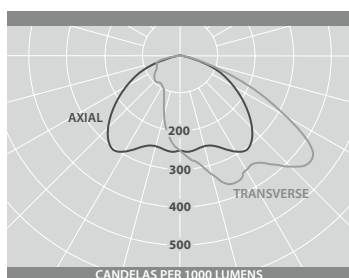

Luminaire Lumen Output:
52W = 6360lm
78W = 9155lm

RANGE

	LED	CAT. No.	APPROX. kg	CIRCUIT
SMART EXTERNAL	52W	JUN 17676	8.9	D/SS
	78W	JUN 17677	8.9	D/SS
STANDARD	52W	JUN 17678L	8.8	
	78W	JUN 17679L	8.8	

CIRCUIT TYPE - suffix catalogue number with:


SMART D - Smart External / SS - SmartScan

STANDARD L - non-dimming (LED) e.g. **JUN 17676SS** etc.

OPTIONS

DESCRIPTION	SUFFIX	EXAMPLE
Photocell (<i>standard versions only</i>)	PC	JUN 17678LPC

DIMENSIONS

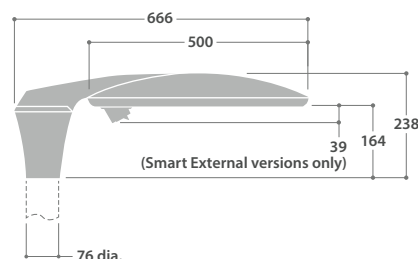

Learn more about SmartScan at:
www.thorlux.com/smartsan