

LEXI-65



With downlight

LEGEND KITS

ISO 7010 Self Adhesive Legend Kit - Cat. No. LXP 17613*





EURO Self Adhesive Legend Kit - Cat. No. LXP 17612*



* Order separately from luminaire

DIMENSIONS

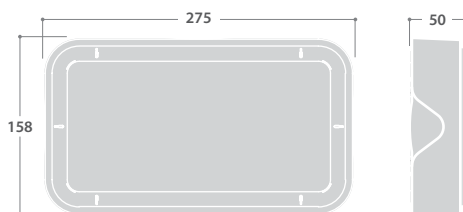

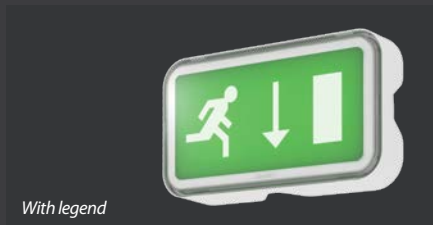

With legend



LED EMERGENCY LUMINAIRES WITH SMARTSCAN WIRELESS COMMUNICATION



SPECIFICATION

- Polycarbonate body finished white (RAL9016)
- Clear polycarbonate cover
- Uses long life LEDs
- Three hour, maintained emergency operation
- Stand-alone self-test and full SmartScan wireless communication compatible
- Low power consumption (3.5W total)
- Integral downlight option for exit illumination
- Optional self-adhesive legend kit
- Status indicator shows operational condition
- Reliable Nickel Metal Hydride (NiMH) battery technology

At Platform 1 SmartScan emergency luminaires may self-test at any time. Consequently, caution should be exercised in situations where this may be inconvenient (such as hotel rooms or hospital wards). At Platform 2 specific testing times can be set via the SmartScan website (SmartScan Gateway required).

SmartScan Wireless Standards Compliance:

Europe: EN 300 220-1 V2.4.1 / EN 301 489-3 V1.6.1

Australasia: ACMA 2014 Radio Communication Standard 2014

Thorlux Patented Wireless Technology - GB2575724

RANGE

LED	CAT. No.	DESCRIPTION	APPROX. kg	TYPE
2W	WLX 17696	Standard	1.0	Maintained ▲
2W	WLX 17697	With integral downlight	1.0	Maintained ▲

▲ Wire link may be removed to enable non-maintained operation

SPARES

DESCRIPTION	CAT. No.	APPROX. kg
Nickel Metal Hydride (NiMH) battery	EMB 618	0.15