


ARCADIAN

COLOUR OPTIONS


Supplied finished in RAL 9010 white as standard. Other colour options are available to special order*.

** Minimum order quantity applies*


EASY COVER REMOVAL

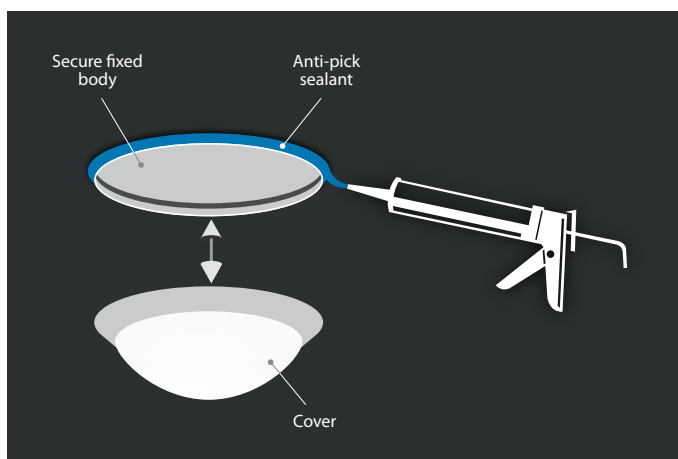


DIMENSIONS

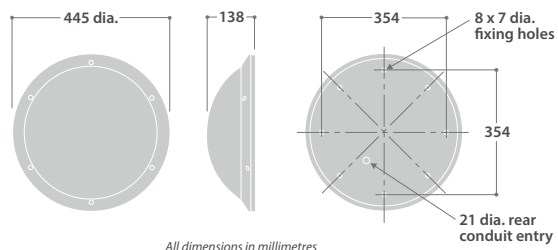

MOUNTING OPTIONS

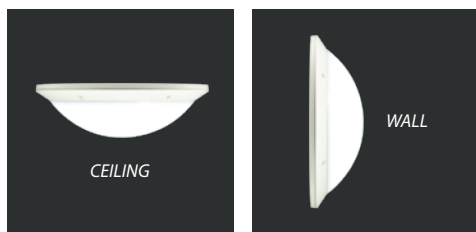

PHOTOMETRIC GUIDE



Luminaire Lumen Output
21W 3000/4000K = 2255lm
31W 3000/4000K = 3265lm



LED ANTI-LIGATURE LUMINAIRES



SPECIFICATION

- Strong spun steel body
- Injection moulded 5mm thick polycarbonate cover with white painted trim as standard (RAL 9010). Other colour trim options available to special order
- SmartScan wireless reporting versions
- Anti-ligature design
- Anti-pick sealant can be used to seal the body whilst still allowing the cover to be removed for maintenance
- Tamper-resistant pin Torx screw fixings (requires T25 tool - see accessory table)
- Microwave presence detector option with stand-by light level feature
- Fitted with 3000K or 4000K LEDs

LED CHARACTERISTICS

Ra 80	°K 3000/ 4000	L70/B10 100K	LL/CW 90.2
P/U P	% >85	R/Rx R	
		PF 0.95	

For LED characteristics explanation see www.thorlux.com/led-characteristics

RANGE

LED	CAT. No.	APPROX. kg	CIRCUIT
21W 3000K	AN 17074	3.1	L/A
21W 4000K	AN 17075	3.1	L/A
31W 3000K	AN 17077	3.1	L/A
31W 4000K	AN 17078	3.1	L/A

CIRCUIT TYPE - suffix catalogue number with:

L - non-dimming (LED) / **A** - dimming (DALI) e.g. **AN 17074L** etc.

EMERGENCY VERSION (21W version only) - prefix catalogue number with:

EAN - Emergency / **TAN** - AutoTest / **DAN** - Scanlight AT (DALI) / **WAN** - SmartScan e.g. **WAN 17074L** etc.

Add 0.3kg to weights listed.

INTEGRAL NIGHT LIGHT VERSION - suffix catalogue number with:

N e.g. **AN 17074LN** etc.

ACCESSORY

DESCRIPTION	CAT. No
T25 pin Torx bit (Suitable for magnetic bit holder)	KEY 16976

OPTION

DESCRIPTION	SUFFIX	EXAMPLE
Microwave presence detector (21W version only)	MD	AN 17074MD



Learn more about SmartScan at:
www.thorlux.com/smartsan