



CLARA 720

DIMENSIONS

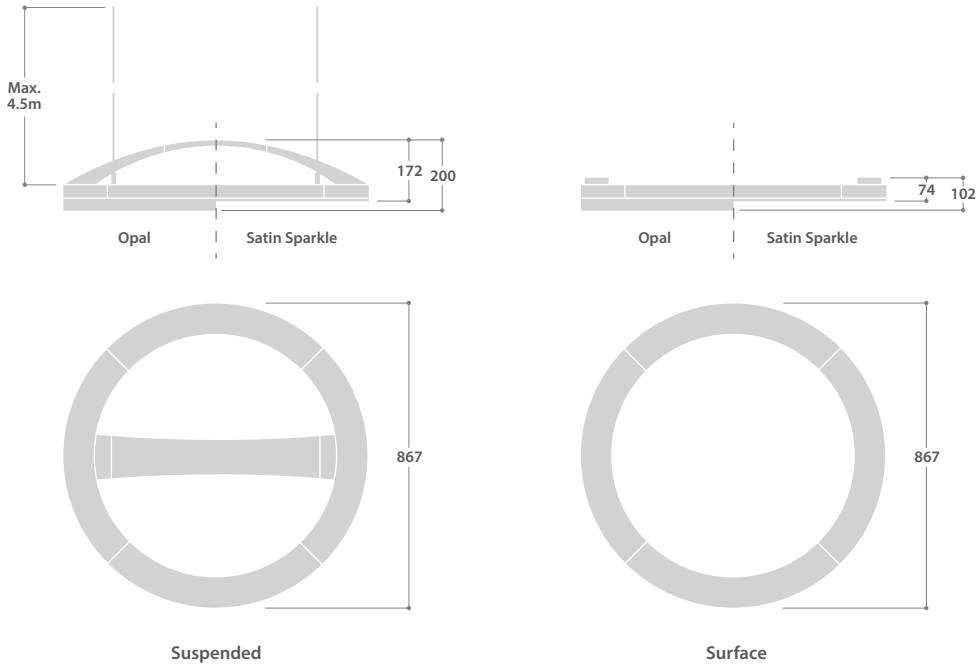


PHOTOMETRIC GUIDE

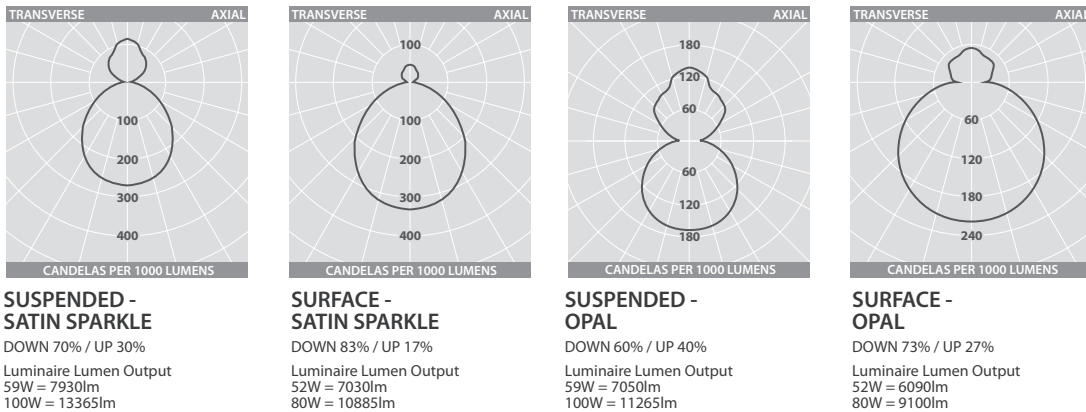

WIRING TIDY




Suitable for use with suspended versions the Wiring Tidy is a surface mounted, easy connect, wiring box for use on solid ceilings.



ACCESSORY

DESCRIPTION	CAT. No.	APPROX. kg
Wiring tidy (For use on suspended versions only)	LL 13361W9	0.4

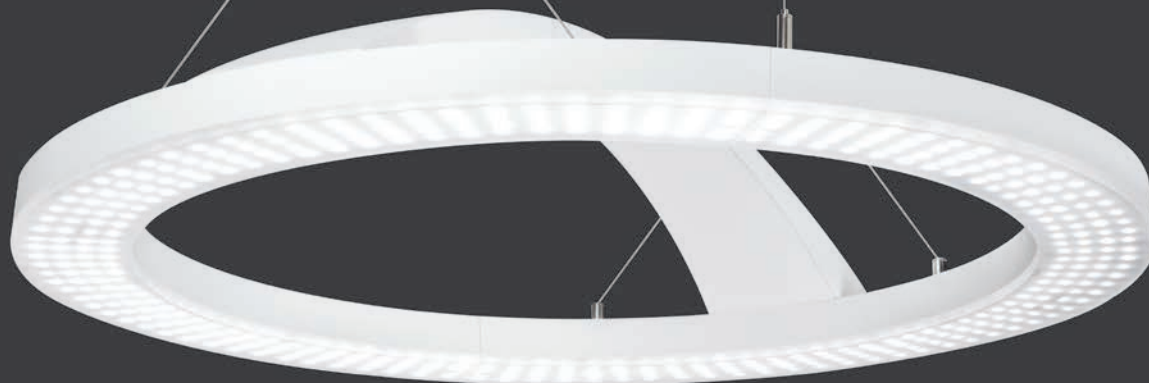

HIGH EFFICIENCY LED PENDANT LUMINAIRES



SPECIFICATION

- Die-cast aluminium body finished full polyester white (RAL9016)
- High efficiency satin sparkle or opal polycarbonate diffuser
- Direct/indirect illumination
- Uplight white as standard with red, green or blue options
- Supplied fully assembled
- Surface option for direct mounting
- Suspended version supplied with easily adjustable wire suspensions and pre-wired clear supply cable (maximum suspension distance - 4.5m)
- Smart versions with intelligent lighting control for use up to 8 metres mounting height
- Optional SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit.
- Fitted with 4000K LEDs

LED CHARACTERISTICS

CRI	80
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	100K - L70/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>85%
REPLACEABLE	YES
POWER FACTOR	>0.95

LL/CW **118.3**

For LED characteristics explanation see www.thorlux.com/led-characteristics

SUSPENDED RANGE

	LED	SATIN SPARKLE	OPAL	APPROX. kg	CIRCUIT
SMART	59W	CA 17283	CA 17390	10.5	D/SS
	100W	CA 17284	CA 17391	10.5	D/SS
STANDARD	59W	CA 17285	CA 17392	10.4	L/A
	100W	CA 17286	CA 17393	10.4	L/A

SURFACE MOUNTED RANGE

	LED	SATIN SPARKLE	OPAL	APPROX. kg	CIRCUIT
SMART	52W	CA 17287	CA 17394	7.9	D/SS
	80W	CA 17288	CA 17395	7.9	D/SS
STANDARD	52W	CA 17289	CA 17396	7.8	L/A
	80W	CA 17290	CA 17397	7.8	L/A

CIRCUIT TYPE - suffix catalogue number with:

SMART D - Smart / SS - SmartScan

STANDARD L - non-dimming / A - dimming (DALI) e.g. CA 17283SS etc.

EMERGENCY VERSION - prefix catalogue number with:

ECA - Emergency / TCA - AutoTest / DCA - Scanlight AT (DALI) / WCA - SmartScan e.g. WCA 17283SS etc.

Add 0.3kg to weights listed.

NOTE: Emergency output on downlight only

COLOURED UPLIGHT - suffix catalogue number with:

R - Red / G - Green / B - Blue e.g. CA 17283DR etc.

Uplight is supplied white as standard.



Learn more about SmartScan at:
www.thorlux.com/smartsan

CLARA 720



Colour your space

The uplight on the Clara 720 is available with red, green or blue colour options, which create a stunning backward light detail. The downlight remains white ensuring effective illumination.

CLARA 720



Opal

Satin Sparkle

Two diffuser options

The Clara 720 is available with an opal diffuser providing a soft, uniform appearance or a slim profile, high efficiency satin sparkle diffuser for a more lively effect.

Opal

Satin Sparkle