
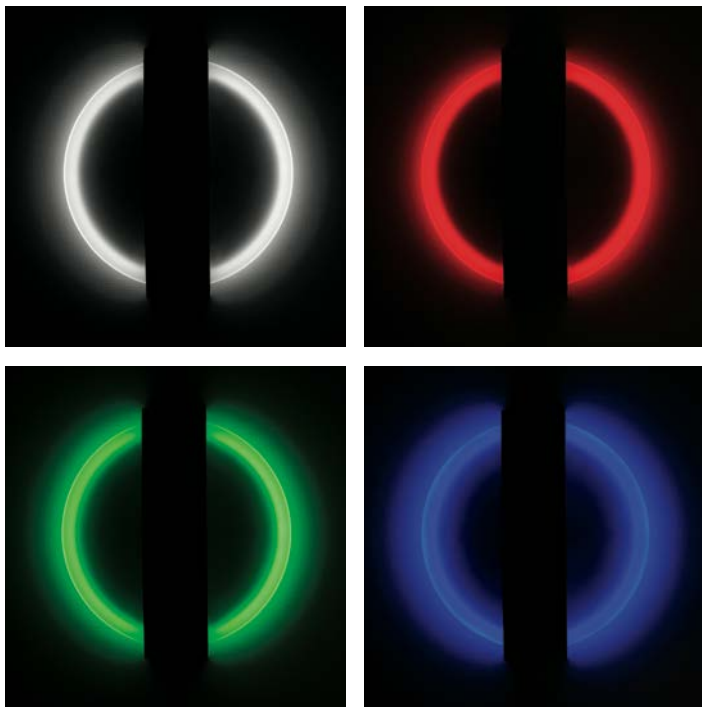


# CLARA 360

IP54

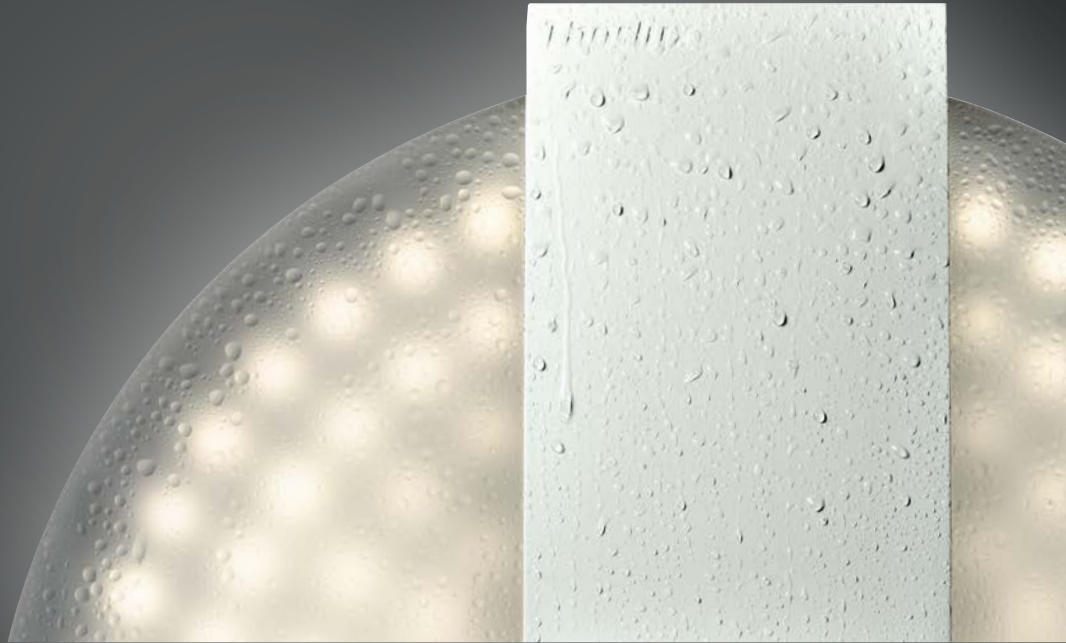

## CHOOSE YOUR COLOUR

Clara 360 is available with a separately switched 3W LED backlit halo in white or RGB. The ability to switch the colour of each half of the luminaire individually makes the Clara 360 extremely versatile. Different colour and pattern combinations can be used to clearly define separate floors or areas of a building or could simply be used to create an effect along a corridor or up a flight of stairs.



## CIRCULAR LED LUMINAIRES SUITABLE FOR WALL OR CEILING MOUNTING



### SPECIFICATION

- Die-cast aluminium body and lid finished full polyester non-yellowing satin white (RAL 9016)
- Silver option (RAL 9006)
- High efficiency satin sparkle effect polycarbonate covers
- Optional 3W LED backlight (RGB or white)
- 60,000 hour life expectancy
- Emergency, AutoTest and Scanlight AT versions using two integral 1W high power LEDs
- Main LED source has LED failure protection
- Smart versions with intelligent lighting control
- Optional SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit.
- Fitted with 4000K LEDs

### LED CHARACTERISTICS

Ra 80+	°K 4000	L80/B10 60K	LL/CW <b>111.3</b>
P/U P	% >87	R/Rx R	

For LED characteristics explanation see [www.thorlux.com/led-characteristics](http://www.thorlux.com/led-characteristics)

### RANGE

	LED	STANDARD	APPROX. kg	WHITE LED HALO	RGB LED HALO	APPROX. kg	CIRCUIT
<b>SMART</b>	20W	CA 15626	3.2	CA 15637	CA 15631	3.3	D/SS
<b>STANDARD</b>	20W	CA 15625	3.1	CA 15634	CA 15628	3.2	L/A

CIRCUIT TYPE - suffix catalogue number with:

**SMART** D - Smart / SS - SmartScan

**STANDARD** L - non-dimming (LED) / A - dimming (DALI) e.g. CA 15626SS etc.

EMERGENCY VERSION - prefix catalogue number with:


ECA - Emergency / TCA - AutoTest / DCA - Scanlight AT (DALI) e.g. ECA 15626D etc.

Add 0.3kg to weights listed.


FINISH OPTION - suffix catalogue number with:

SV3 - Silver RAL 9006 e.g. CA 15626DSV3 etc.

### DIMENSIONS

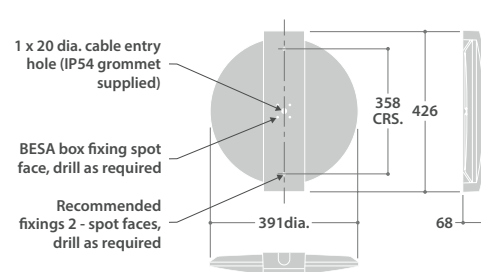

### PHOTOMETRIC GUIDE



**LED**  
Luminaire Lumen Output  
20W = 2560lm

Learn more about SmartScan at:  
[www.thorlux.com/smartsan](http://www.thorlux.com/smartsan)