


BROAD DISTRIBUTION

General area lighting up to typically 5m

Gentle cut-off for excellent glare control

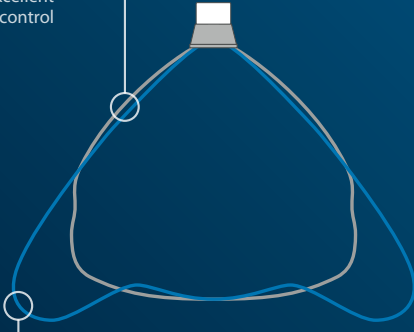


Broad distribution allows greater longitudinal spacings

NARROW DISTRIBUTION

Ideal for rack lighting up to typically 7m

Gentle cut-off for excellent glare control

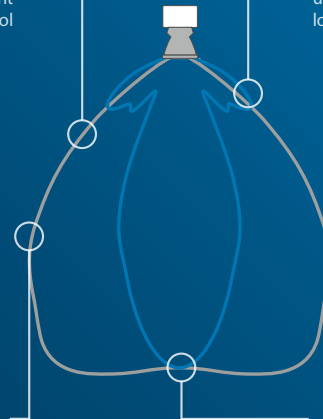

Illuminates upper rack locations

Broad distribution allows greater longitudinal spacings

Delivers accurate light control to lower racks



KANBY LED MIRROR



LED MIRROR REFLECTOR LUMINAIRES FOR WAREHOUSE APPLICATIONS



SPECIFICATION

- Steel body and end caps finished full polyester, non-yellowing white
- Extremely efficient specular aluminium reflector provides low glare illumination of racking aisles
- Smart versions with intelligent lighting control for use up to 10 metres mounting height
- Optional SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit.
- High quality control gear and LEDs designed to achieve 100,000 hour life expectancy
- Fitted with 4000K LEDs

LED CHARACTERISTICS

Ra 80+	°K 4000	L70/B10 100K	LL/CW 144.3
P/U P	% 90	R/Rx R	

For LED characteristics explanation see www.thorlux.com/led-characteristics

RANGE

	LENGTH (mm)	LED	BROAD DISTRIBUTION	NARROW DISTRIBUTION	FIXINGS	APPROX. kg	CIRCUIT
SMART	1558	22W LED	KB 15876	KB 15879	Suitable for BESA fixing on 600 to 610mm centres	3.0	D/SS
		30W LED	KB 15877	KB 15880			D/SS
		52W LED	KB 15878	KB 15881			D/SS
STANDARD	1508	22W LED	KB 15870	KB 15873	As above	2.9	L/A
		30W LED	KB 15871	KB 15874			L/A
		52W LED	KB 15872	KB 15875			L/A

CIRCUIT TYPE - suffix catalogue number with:

SMART D - Smart / SS - SmartScan



STANDARD L - non-dimming (LED) / A - dimming (DALI) e.g. **KB 15876SS** etc.

EMERGENCY VERSION - prefix catalogue number with:

EKB - Emergency / **TKB** - AutoTest e.g. **EKB 15876D** etc.

Add 0.3kg to weights listed.

PHOTOMETRIC GUIDE




BROAD DISTRIBUTION

Luminaire Lumen Output:
22W = 3670lm
30W = 5050lm
52W = 7980lm

NARROW DISTRIBUTION

Luminaire Lumen Output:
22W = 3575lm
30W = 4820lm
52W = 7800lm

DIMENSIONS



Learn more about SmartScan at:
www.thorlux.com/smartsan