


# LED BAY




## DIMENSIONS

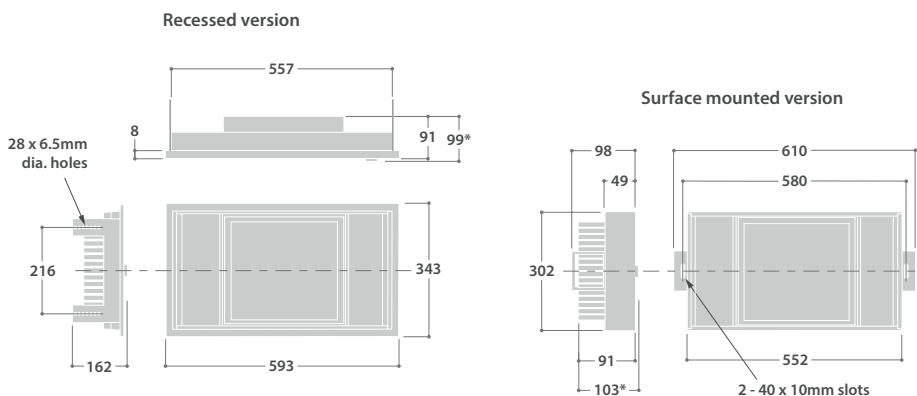

\* Smart versions only

## PHOTOMETRIC GUIDE

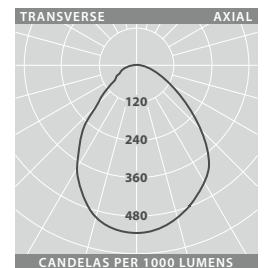

**116W LED**  
Luminaire Lumen Output:  
116W = 9990lm



Surface mounted version

Recessed version

## LOW DEPTH LED LUMINAIRES



### SPECIFICATION

- Zinc coated body finished full polyester, non-yellowing white
- 2.8mm thick acrylic front cover
- Recessed or surface mounting options
- Smart versions, suitable for use up to 10m mounting height
- Optional SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit.
- Fitted with 4000K LEDs

### LED CHARACTERISTICS

Ra 80+	°K 4000	L70/B10 100K	LL/CW <b>78.0</b>
P/U P	% >92	R/Rx R	

For LED characteristics explanation see [www.thorlux.com/led-characteristics](http://www.thorlux.com/led-characteristics)

### RANGE


	MOUNTING	LED	CAT. No.	APPROX. kg	CIRCUIT
SMART	Recessed	116W	<b>LY 14903</b>	13.1	D/SS
	Surface Mounted	116W	<b>LY 14905</b>	8.8	D/SS
STANDARD	Recessed	116W	<b>LY 14902L</b>	13.0	
	Surface Mounted	116W	<b>LY 14904L</b>	8.7	

CIRCUIT TYPE - suffix catalogue number with:

- SMART** D - Smart / SS - SmartScan
- STANDARD** L - non-dimming (LED) e.g. LY 14903SS etc



Smart version

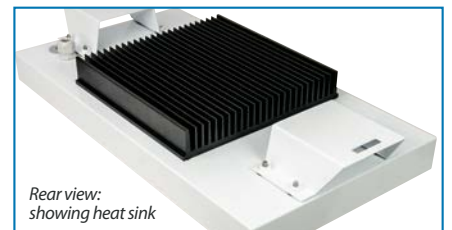

Rear view:  
showing heat sink



Learn more about SmartScan at:  
[www.thorlux.com/smartsan](http://www.thorlux.com/smartsan)