

# LED NIGHT LIGHT



## RECESSED OR SURFACE LED DOWNLIGHTERS

IP40 SURFACE VERSION IP20 RECESSED VERSION CE LED

### SPECIFICATION

- Injection moulded polycarbonate housing finished satin white (RAL 9016)
- Complies with the CIBSE 2008 Hospital Lighting Guide (LG2)
- Attractive contemporary styling
- Surface or recessed versions
- Highly efficient 1.5W LED
- Extremely low glare optics for maximum patient visual comfort
- LED driven at low current for long "maintenance free" life
- Supplied complete with high quality electronic driver surface version - integral
- Fitted with 6000K LED

### LED CHARACTERISTICS

Ra	°K	L80/B10	LL/CW
70	6000	60K	56.0
P/U	%	R/Rx	PF
U	>85	Rx	0.6


For LED characteristics explanation see [www.thorlux.com/led-characteristics](http://www.thorlux.com/led-characteristics)

### RANGE

CAT. No.	VERSION	APPROX. kg
NL 14350	Recessed	0.13
NL 14387	Surface	0.30

### DIMENSIONS

#### Recessed Version

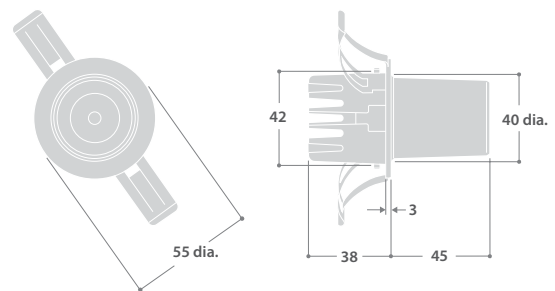

#### Surface Version

