




DIMENSIONS



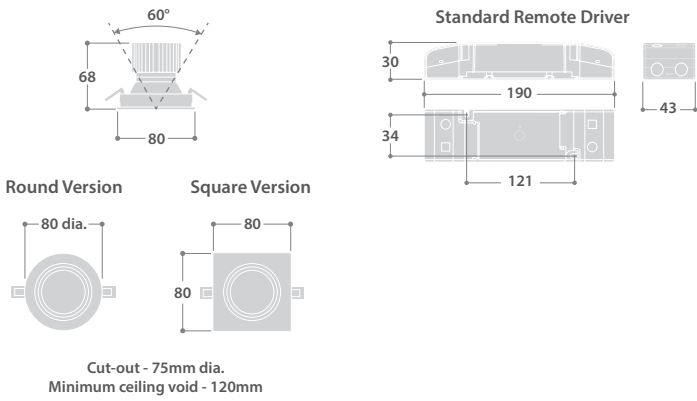

Round Version



Square Version

ADJUSTABLE RECESSED ACCENT DOWNLIGHTS



SPECIFICATION

- Die-cast aluminium ring assembly finished satin white
- Black and Silver finishes available to special order*
- Spot 21° and Flood 45° beam angle versions
- 355° azimuth adjustment
- 60° vertical adjustment
- Injection moulded, black, anti-glare reflector bezel
- Supplied with remote gear unit(s) fitted with 2m lead
- Luminaires can be supplied pre-wired with a purpose made 1m connection lead for plugging directly into the Smart Hub
- Fitted with CRI 90 LEDs with enhanced R9 value. Suitable for retail applications
- CRI 80 available*
- 3000K and 4000K versions

* Minimum order quantity applies

RANGE

LED	SPOT 21° BEAM	FLOOD 45° BEAM	APPROX. kg	CIRCUIT
Round Version				
5W - 3000K	MA17930	MA17934	0.3	L/A
8W - 3000K	MA17931	MA17935	0.3	L/A
5W - 4000K	MA17932	MA17936	0.3	L/A
8W - 4000K	MA17933	MA17937	0.3	L/A
Square Version				
5W - 3000K	MA17938	MA17942	0.3	L/A
8W - 3000K	MA17939	MA17943	0.3	L/A
5W - 4000K	MA17940	MA17944	0.3	L/A
8W - 4000K	MA17941	MA17945	0.3	L/A

CIRCUIT TYPE - suffix catalogue number with:

L - non-dimming (LED) / **A** - dimming (DALI) e.g. **MA 17930L** etc.

HUB VERSIONS - suffix catalogue number with **SHL** e.g. **MA 17930SHL**