





## CIRCULAR RECESSED DOWNLIGHTS



### SPECIFICATION

- High pressure die-cast aluminium bezel finished full polyester satin white
- Black and Silver finishes available to special order\*
- Broad distribution reflector
- Sprung suspension arms for rapid installation
- Supplied with remote gear unit fitted with 2m lead
- Luminaires can be supplied pre-wired with a purpose made 1m connection lead for plugging directly into the Smart Hub
- 3000K and 4000K versions

\* Minimum order quantity applies


## RANGE

LED	CAT. No.	APPROX. kg	CIRCUIT
16W - 3000K	<b>NEM 18028</b>	1.4	L/A
25W - 3000K	<b>NEM 18029</b>	1.4	L/A
16W - 4000K	<b>NEM 18030</b>	1.4	L/A
25W - 4000K	<b>NEM 18031</b>	1.4	L/A

CIRCUIT TYPE - suffix catalogue number with:  
**L** - non-dimming (LED) / **A** - dimming (DALI) e.g. **NEM 18028L** etc.

HUB VERSIONS - suffix catalogue number with **SHL** e.g. **NEM 18028SHL**

## DIMENSIONS

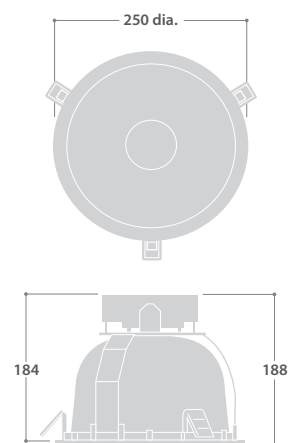

Cut-out - 232-240mm dia.  
 Minimum ceiling void - 240mm

