





## PHOTOMETRIC GUIDE




### CLEAR COVER

Luminaire Lumen Output:  
11W = 1665lm  
16W = 2280lm



### SATIN COVER


Luminaire Lumen Output:  
11W = 1540lm  
16W = 2145lm



### LOW PROFILE SATIN COVER

Luminaire Lumen Output:  
11W = 1605lm  
16W = 2170lm


## DIMENSIONS

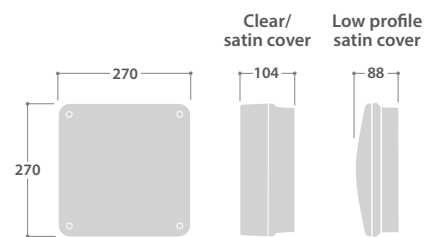

Fixing points: 4 x Spot faces on 205mm centres (drill as required) and 1 central BESA box fixing

## ACCESSORIES

DESCRIPTION	CAT. No.
Bezel for semi-recessed mounting ( <i>black finish</i> )	PS 11876B
Bezel for semi-recessed mounting ( <i>white finish</i> )	PS 11876W
Key for tamper-resistant screws	KEY 7979
Adaptor for cornice mounting ( <i>black finish</i> )	PS 18886B
Adaptor for cornice mounting ( <i>white finish</i> )	PS 18886W



Bezel for semi-recessed mounting - black



Cornice mounting

## OPTIONS

DESCRIPTION	SUFFIX	EXAMPLE
Photocell ▲	PC	PS 8128PC
Microwave presence detector	MD	PS 14913MD

▲ Not suitable for semi-recessed or cornice mounting

# PRISMALETTE



Clear cover



Satin cover



Low profile satin cover



Clear cover version

Low profile satin cover version

## VANDAL-RESISTANT LUMINAIRES



### SPECIFICATION

- Strong pressure die-cast LM2 aluminium body. Textured black, full polyester powder finish as standard
- White finish option
- Hinged clear prismatic or satin, flame-retardant polycarbonate cover
- Low profile satin polycarbonate cover version
- Tamper-resistant cover screws as standard
- Optional photocell control
- Bezel trim for semi-recessed mounting
- Complies with M.O.D. JSP482 Chapter 8 Document for 'Category C' areas
- Microwave presence detector option with stand-by light level feature
- Fitted with 4000K LEDs

## LED CHARACTERISTICS

CRI	80
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	63K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	85%
REPLACEABLE	YES
POWER FACTOR	>0.95
LL/CW	120.0

For LED characteristics explanation see [www.thorlux.com/led-characteristics](http://www.thorlux.com/led-characteristics)

## RANGE

	LAMP	CAT. No.	APPROX. kg
CLEAR COVER	11W LED	<b>PS 17608L</b>	2.8
	16W LED	<b>PS 14913L</b>	2.8
SATIN COVER	11W LED	<b>PS 17609L</b>	2.8
	16W LED	<b>PS 14914L</b>	2.8
LOW PROFILE SATIN COVER	11W LED	<b>PS 18420L</b>	2.7
	16W LED	<b>PS 18421L</b>	2.7
RETRO-FIT GEAR TRAY	11W LED	<b>PS 14917L</b>	0.8

WHITE OPTION - add suffix **W** - White e.g. **PS 17608LW** etc.

CIRCUIT TYPE - **L** - non-dimming (LED)

EMERGENCY VERSION - prefix catalogue number with:  
**EPS** - Emergency / **TPS** - AutoTest e.g. **EPS 17608L** etc.  
 Emergency and AutoTest versions add 0.3kg