



RECESSED LINEAR WALL WASH LUMINAIRES



SPECIFICATION

- Steel body/chassis and reflector finished full polyester satin white
- Asymmetric distribution providing uniform illumination of vertical surfaces
- Acrylic ribbed satin diffuser
- Hinged reflector for easy access to wiring terminations
- 3000K or 4000K versions

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	3000/4000K
RATED LIFE (HOURS)	60K - L70/B10
PROTECTION	-
DRIVER EFFICIENCY	>84%
REPLACEABLE	-
POWER FACTOR	>0.9

LL/CW 92.7


For LED characteristics explanation see www.thorlux.com/led-characteristics

RANGE

NOMINAL SIZE (mm)	LAMP	CAT. No.	LENGTH (mm)	APPROX. kg	CIRCUIT
600	19W LED 3000K	QL 18056	597	3.3	L/A
1200	38W LED 3000K	QL 18057	1197	6.6	L/A
600	19W LED 4000K	QL 18058	597	3.3	L/A
1200	38W LED 4000K	QL 18059	1197	6.6	L/A


CIRCUIT TYPE - suffix catalogue number with:
L - non-dimming (LED) / **A** - dimming (DALI) e.g. **QL 18056L** etc.

DIMENSIONS

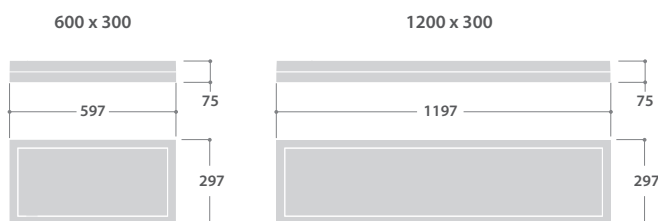

All dimensions in millimetres

PHOTOMETRIC GUIDE

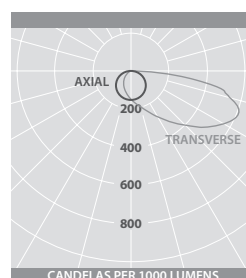

QUADLINE

LED	3000K (lm)	4000K (lm)
19W	1895	2040
38W	3795	4080