





COLUMN ACCESSORIES

Twin Back to Back Floodlight Mounting Crossarm (for Starguard only)
CA2/SG versions

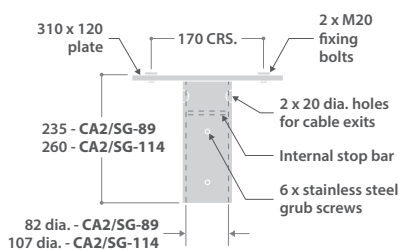

Single Floodlight Mounting Pot

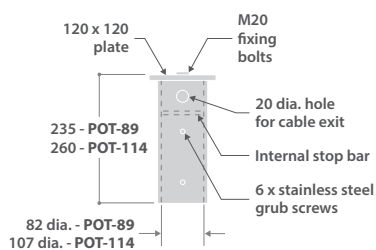


POT-89 or CA2/SG-89 - fits over 76 dia. shaft 4, 5 and 6m columns

POT-114 or CA2/SG-114 - fits over 101 dia. spigot insert on 8 and 10m columns

MOUNTING BRACKET




Universal mounting bracket - Wall position

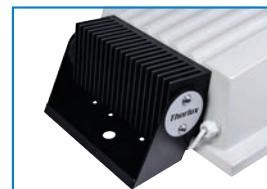


Universal mounting bracket - Pole top position

DIMENSIONS

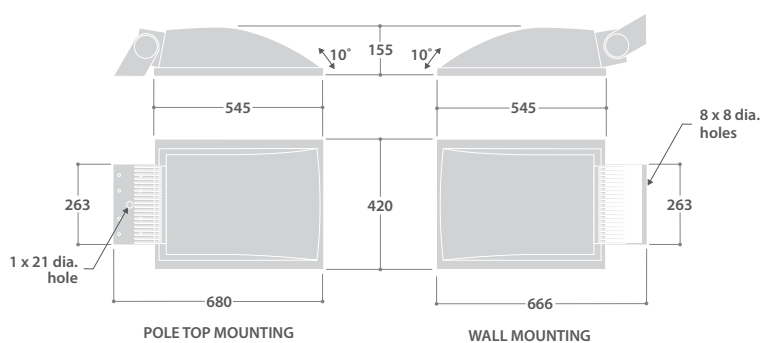


PHOTOMETRIC GUIDE



140W LED 8m mounting height

Luminaire Lumen Output:
62W = 6555lm
140W = 14745lm





ZERO UPWARD LIGHT, AREA AND ROADWAY LUMINAIRES

IP65 CE LED WINDAGE - 0.10m²

SPECIFICATION

- Corrosion-resistant and fire-retardant GRP moulded body - light grey finish
- Clear toughened/safety glass cover
- Aluminium heat sink ensures cool running of control gear and LEDs for optimum life in high ambient temperatures
- ZERO upward light pollution
- High elevation peak beam angle for outstanding area coverage relative to mounting height
- High beam efficiency with low glare
- Universal mounting bracket for pole top or wall mounting
- Photocell option
- Fitted with 4000K or 5700K LEDs

LED CHARACTERISTICS

CRI	70+
COLOUR TEMPERATURE	4000K/5700K
RATED LIFE (HOURS)	100K - L90/B10
PROTECTION	LED PROTECT
DRIVER EFFICIENCY	>90%
REPLACEABLE	YES
POWER FACTOR	>0.90
LL/CW	98.3

For LED characteristics explanation see www.thorlux.com/led-characteristics

RANGE

LED	4000K VERSION	5700K VERSION	APPROX. kg
62W	STG 17565L	STG 16354L	11.8
140W	STG 17566L	STG 16355L	11.8

CIRCUIT TYPE - L - non-dimming (LED)

NOTE: Pole top versions - Mounting pots or crossarms are required for this luminaire and must be ordered separately

OPTIONS

DESCRIPTION	SUFFIX	EXAMPLE
Photocell	PC	STG 17565LPC