


ZENITH-L



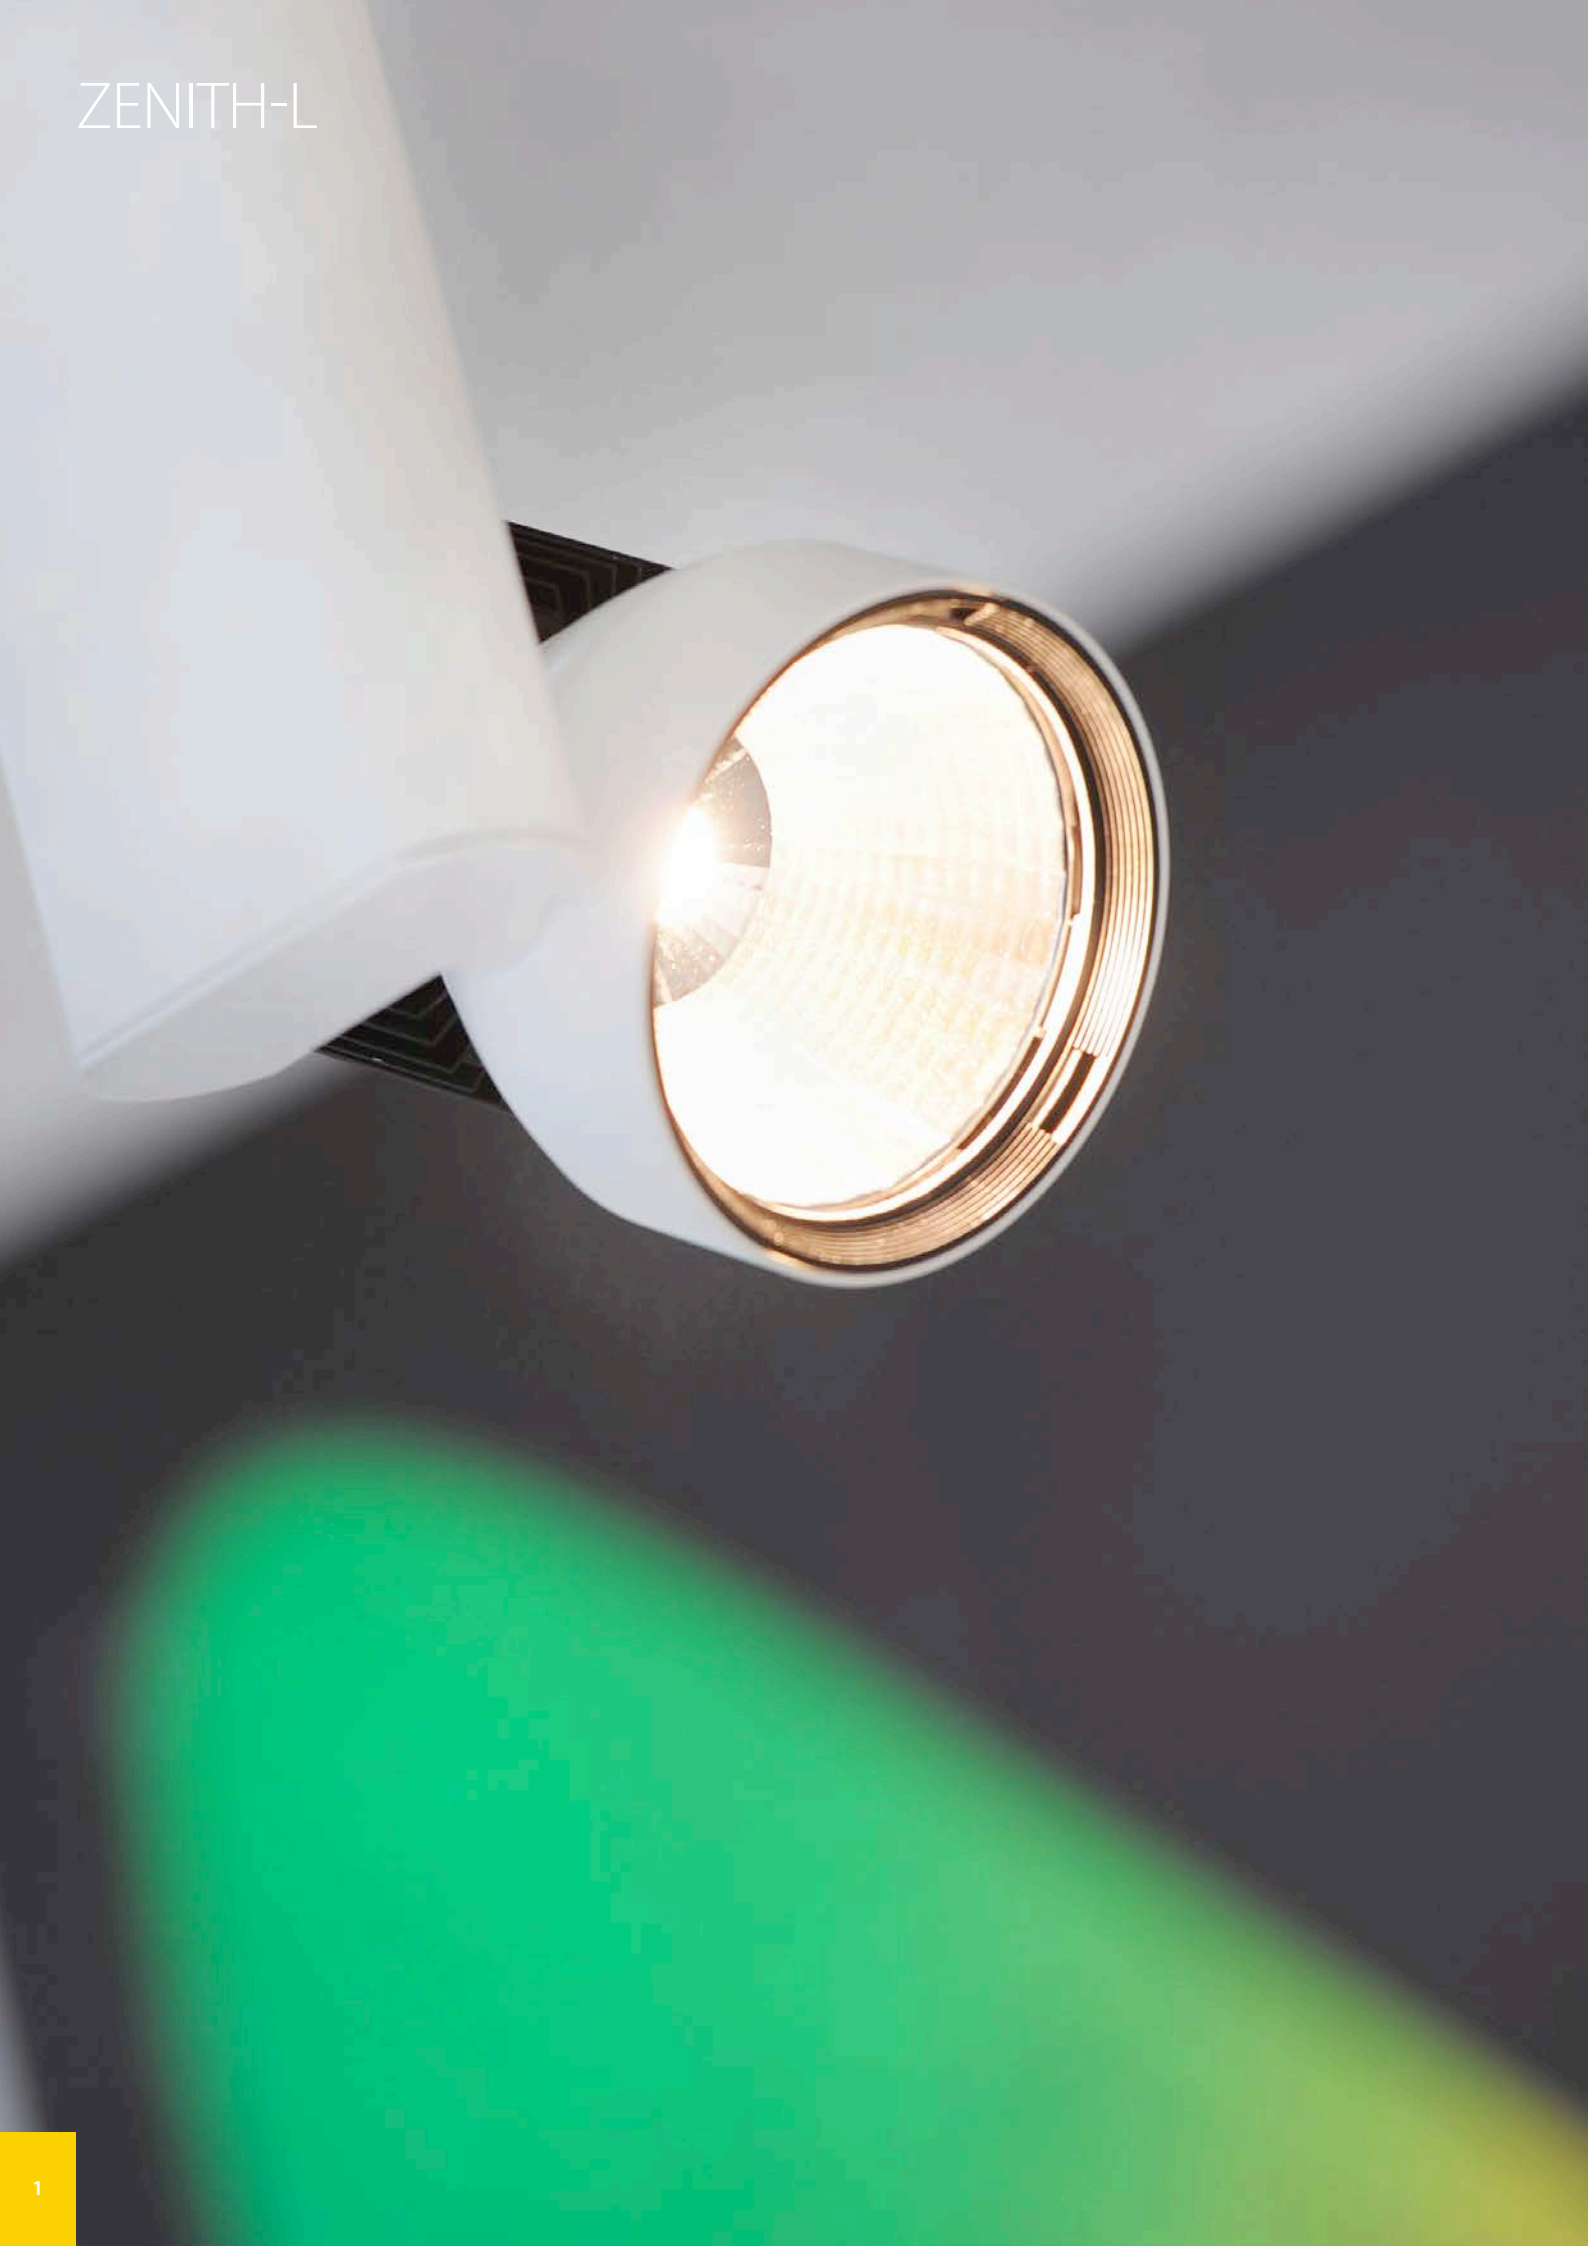

CEILING MOUNTED ADJUSTABLE SPOTLIGHTS

IP20 CE LED

SPECIFICATION

- Extruded aluminium gear enclosure finished full polyester satin white
- High pressure die-cast aluminium spotlight body finished full polyester satin white
- Black and Silver finishes available to special order*
- Integral electronic control gear
- 17°, 28° and 41° beam angle versions
- 355° azimuth adjustment
- 180° vertical adjustment
- Injection moulded, black, anti-glare reflector bezel
- Fitted with 0.5m lead
- Luminaires can be supplied pre-wired with a purpose made 1m connection lead for plugging directly into the Smart Hub
- Suitable for ceiling mount only
- Fitted with CRI 90 LEDs with enhanced R9 value. Suitable for retail applications
- CRI 80 available*
- 3000K and 4000K versions

* Minimum order quantity applies

RANGE

LED	17° BEAM	28° BEAM	41° BEAM	APPROX. kg	CIRCUIT
20W - 3000K	ZEN 18080	ZEN 18086	ZEN 18092	1.6	L/A
28W - 3000K	ZEN 18081	ZEN 18087	ZEN 18093	1.6	L/A
35W - 3000K	ZEN 18082	ZEN 18088	ZEN 18094	1.6	L/A
20W - 4000K	ZEN 18083	ZEN 18089	ZEN 18095	1.6	L/A
28W - 4000K	ZEN 18084	ZEN 18090	ZEN 18096	1.6	L/A
35W - 4000K	ZEN 18085	ZEN 18091	ZEN 18097	1.6	L/A

CIRCUIT TYPE - suffix catalogue number with:

L - non-dimming (LED) / **A** - dimming (DALI) e.g. **ZEN 18080L** etc.

HUB VERSIONS - suffix catalogue number with **SHL** e.g. **ZEN 18080LSHL**

DIMENSIONS

