


GLODOME





PHOTOMETRIC GUIDE



Luminaire Lumen Output:
 16W = 1820
 20W = 2455
 26W = 2880

DIMENSIONS

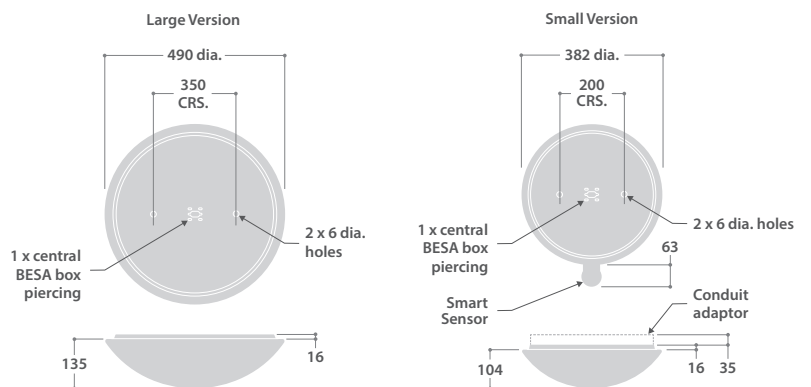

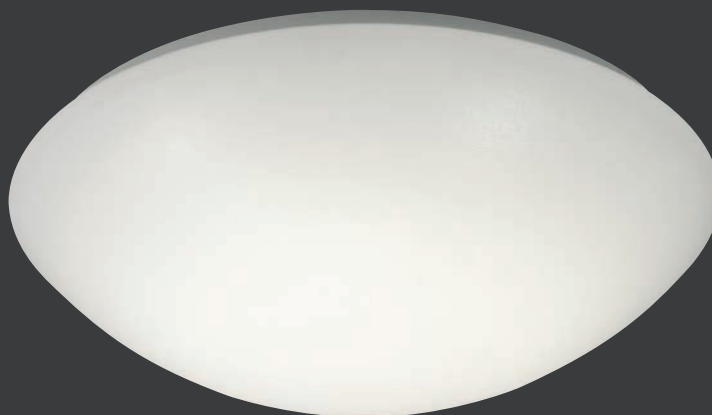

SURFACE MOUNTED LED LUMINAIRES



SPECIFICATION

- Spun aluminium body finished full polyester, non-yellowing white
- Textured opal polycarbonate cover
- Smart version with intelligent lighting control
- Optional SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit.
- Microwave presence detector option with stand-by light level feature
- Fitted with 4000K LEDs

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	91K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	88%
REPLACEABLE	YES
POWER FACTOR	>0.95

LL/CW **106.7**

For LED characteristics explanation see www.thorlux.com/led-characteristics

ACCESSORIES

DESCRIPTION	CAT. No.
IP54 sealing gasket - small version	GLO 16485
IP54 sealing gasket - large version	GLO 16539
Conduit adaptor - small version	GLO 17433

OPTIONS

DESCRIPTION	SUFFIX	EXAMPLE
Microwave presence detector	MD	GLO 16483MD

RANGE

	LED	CAT. No.	APPROX. kg	CIRCUIT
SMART	Small version 20W	GLO 17426	1.2	D/SS
	Small version 16W 20W	GLO 16483 GLO 16484	1.1 1.1	L/A L/A
STANDARD	Large version 26W	GLO 15856	2.1	L/A

CIRCUIT TYPE - suffix catalogue number with:

SMART D - Smart / SS - SmartScan

STANDARD L - non-dimming (LED) / A - dimming (DALI) e.g. **GLO 17426SS** etc.

EMERGENCY VERSION - prefix catalogue number with:

EGL - Emergency / TGL - AutoTest / DGL - Scanlight AT (DALI) /

WGL - SmartScan (16W and 20W only) e.g. **WGL 17426SS** etc.

Add 0.3kg to weights listed



Learn more about SmartScan at:
www.thorlux.com/smartscan