LEXI

MOUNTING OPTIONS

Ceiling Mounted

Wall Mounted

Suspension Mounted

Cantilever Mounted

DIMENSIONS

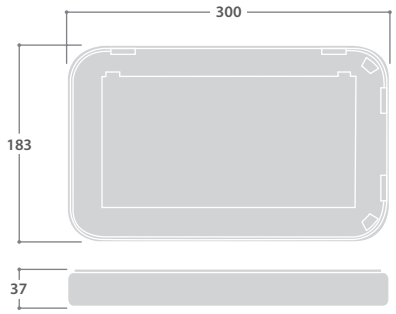

OPTIONAL MOUNTING KITS

All other methods (as shown) supplied as standard

DESCRIPTION	CAT. No.	APPROX. kg
Suspension mounting kit	**LX 17421**	0.2

SPARES

DESCRIPTION	CAT. No.	APPROX. kg
Nickel Metal Hydride (NiMH) battery	**EMB 617**	0.15

End of life SmartScan batteries can be returned to Thorlux for recycling.

Integral downlight for exit illumination

Hinged battery access

Silver bezel option

EMERGENCY EXIT SIGNS WITH DEDICATED SMARTSCAN WIRELESS TECHNOLOGY VERSIONS

IP40 CE LED

SPECIFICATION

- Polycarbonate body finished white (RAL9016) with acrylic legend panel
- Silver bezel option
- Uses long life LEDs
- Three hour, maintained emergency operation
- Simple to install, full status reporting SmartScan wireless communication versions
- Low power consumption (1.7W total)
- Ceiling, wall or cantilever mounted
- Optional 3m wire suspension kit
- Integral downlight for exit illumination
- Choice of legends
- Status indicator shows operational condition
- Hinged battery compartment (requires tool access) provides fast battery replacement
- Reliable Nickel Metal Hydride (NiMH) battery technology

At Platform 1 SmartScan emergency luminaires may self-test at any time. Consequently, caution should be exercised in situations where this may be inconvenient (such as hotel rooms or hospital wards). At Platform 2 specific testing times can be set via the SmartScan website (SmartScan Gateway required).

SmartScan Configurations

Find out more at **www.thorlux.com/smartscan**

RANGE

ISO 7010 LEGEND	CAT. No	EURO LEGEND	CAT. No	APPROX. kg	TYPE
SmartScan					
A	**WLX 17463**	D	**WLX 17460**	1.0	Maintained ▲
B	**WLX 17464**	E	**WLX 17461**	1.0	Maintained ▲
C	**WLX 17465**	F	**WLX 17462**	1.0	Maintained ▲
AutoTest					
A	**TLX 17463**	D	**TLX 17460**	1.0	Maintained ▲
B	**TLX 17464**	E	**TLX 17461**	1.0	Maintained ▲
C	**TLX 17465**	F	**TLX 17462**	1.0	Maintained ▲
Emergency					
A	**ELX 17463**	D	**ELX 17460**	1.0	Maintained ▲
B	**ELX 17464**	E	**ELX 17461**	1.0	Maintained ▲
C	**ELX 17465**	F	**ELX 17462**	1.0	Maintained ▲

▲ Wire link may be removed to enable non-maintained operation

FINISH OPTIONS - suffix catalogue number with: **SV3** - **Silver** e.g. **WLX 17463 SV3** etc.

SmartScan Wireless Standards Compliance:

Europe: EN 300 220-1 V2.4.1 / EN 301 489-3 V1.6.1

Australasia: ACMA 2014 Radio Communication Standard 2014

Thorlux Patented Wireless Technology - GB2575724

5 YEAR BATTERY WARRANTY*

** SmartScan versions only*

LEGEND OPTIONS

ISO 7010 Double Sided *

A

EURO Double Sided *

D

ISO 7010 Single Sided

B C

EURO Single Sided

E F

* Suitable for wall mount applications. Legend can be inserted as arrow left or arrow right.