




Illuminated Halo


Light is directed back onto the wall for enhanced visual appearance.



DIMENSIONS

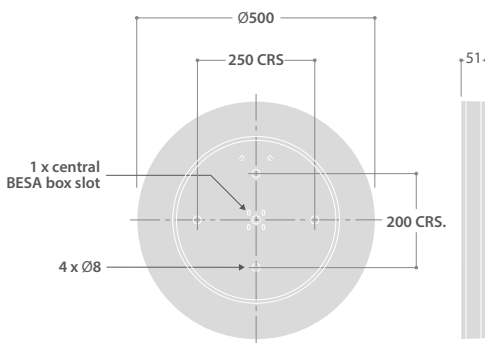

PHOTOMETRIC GUIDE

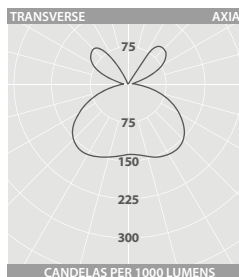

Luminaire Lumen Output:
 10W = 1665lm
 17W = 2705lm
 24W = 3685lm



Smart version

CIRCULAR SURFACE MOUNTED LUMINAIRES WITH EXCELLENT LATERAL DISTRIBUTION



SPECIFICATION

- Spun steel gear tray finished full polyester, non-yellowing white
- Sealed light engine assembly comprising of clear polycarbonate cover, moulded reflector and white trim
- Low profile unobtrusive design
- Wipe clean surface, no dust traps
- Excellent lateral light distribution - suitable for stairwells
- Tool free access (option to lock cover using security screw supplied)
- Indirect light source, extremely low glare and high visual comfort
- Smart versions with intelligent lighting control - integrated Smart module
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- Fitted with 4000K LEDs

LED CHARACTERISTICS

CRI	80
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	90K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>80%
REPLACEABLE	YES
POWER FACTOR	>0.9

LL/CW 142.4

For LED characteristics explanation see www.thorlux.com/led-guide

RANGE

	LED	CAT. No.	APPROX. kg	CIRCUIT
SMART	10W	OV 19280	3.9	D/SS
	17W	OV 19281	3.9	D/SS
	24W	OV 19282	3.9	D/SS
STANDARD	10W	OV 19283	3.8	L/A
	17W	OV 19284	3.8	L/A
	24W	OV 19285	3.8	L/A

CIRCUIT TYPE - suffix catalogue number with:

SMART D - Smart / SS - SmartScan

STANDARD L - non-dimming / A - dimming (DALI) e.g. OV 19280SS etc.

EMERGENCY VERSION - prefix catalogue number with:

EOV - Emergency } (Not available when selecting the 'SS' suffix)
TOV - AutoTest

WOV - SmartScan (Only available when selecting the 'SS' suffix)
e.g. WOV 19280SS etc.

Add 0.3kg to weights listed

SmartScan Configurations



Find out more at www.thorlux.com/smartsan