ELLISSE PENDANT MEGA

Federico Palazzari

LED pendant lamp, available in five versions: major, minor and double, triple and mega, widespread direct or indirect lighting. Extruded aluminium painted matt white or matt black, polished or glossy gold anodized. Opaline diffuser. Ellisse is manufactured through a proprietary technology to combine the extruded bars (patent pending). Major version available also for wall and floor applications, with a marble base on the floor version and with a wall kit mounting on the wall one.



DOWNLIGHT | 3000K

LAMPING

Source Total power Emission Switching Tension Color temperature Luminous flux Energy class linear LED 88W diffused dimmable 1-10V 110 / 230 V 3000K 4421lm (real flux) A+ cable lenght 2,5m; gold polished anodized/polished aluminium on request

Codes

Notes


ELP LWW 59 ELP LNW 59 ELP LOW 59

Certificazioni



Structure/Diffuser white/white black/white

gold painted/white

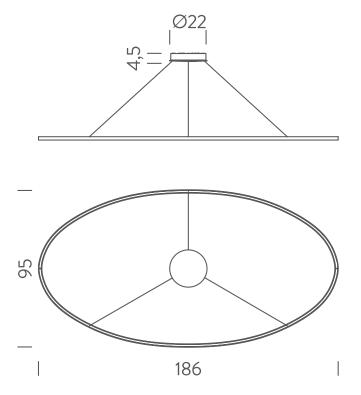

DOWNLIGHT | 2700K

LAMPING

Source Total power Emission Switching Tension Color temperature Luminous flux Energy class linear LED 85W diffused dimmable 1-10V 110 / 230 V 2700K 4421lm (real flux) A+ cable lenght 2,5m; gold polished anodized/polished aluminium on request

Structure/Diffuser

gold painted/white

white/white

black/white


Codes

Notes

ELP LW2 59 ELP LN2 59 ELP LO2 59

Certificazioni



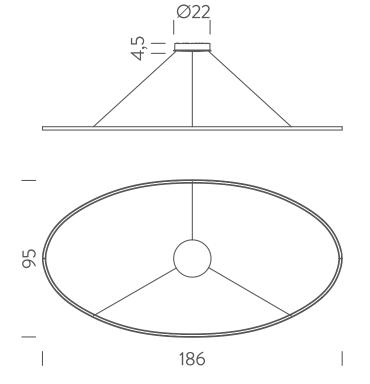

UPLIGHT | 2700K

LAMPING

Source Total power Emission Switching Tension Color temperature Luminous flux Energy class

Notes

Codes

ELP LW2 58 ELP LN2 58 ELP LO2 58


Certificazioni



linear LED 85W diffused dimmable 1-10V 110 / 230 V 2700K 4421lm (real flux) A+ cable lenght 2,5m; gold polished anodized/polished aluminium on request

Structure/Diffuser

white/white black/white gold painted/white

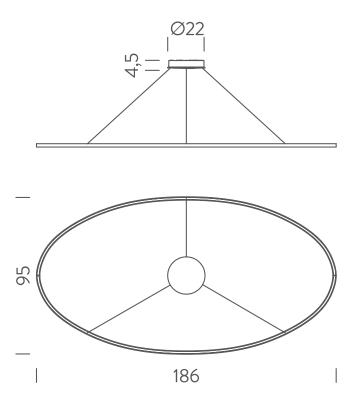

UPLIGHT | 3000K

LAMPING

Source Total power Emission Switching Tension Color temperature Luminous flux Energy class

Notes

Codes ELP LOW 58

ELP LWW 58 ELP LNW 58

Certificazioni



linear LED 88W diffused dimmable 1-10V 110 / 230 V 3000K 4421lm (real flux) A+ cable lenght 2,5m; gold polished anodized/polished aluminium on request

Structure/Diffuser

gold painted/white white/white black/white

