

XL-FIVE DAYLITE

RANGE

	NOMINAL SIZE (mm)	LED	CAT. No.	APPROX. kg	CIRCUIT
SMART	600 x 600	20W	XL 17596	7.5	D/SS
		26W	XL 16518	7.5	D/SS
		38W	XL 16519	7.5	D/SS
STANDARD	600 x 600	20W	XL 17597	7.3	L/A
		26W	XL 16520	7.3	L/A
		38W	XL 16521	7.3	L/A

CIRCUIT TYPE - suffix catalogue number with:

SMART D - Smart / SS - SmartScan

STANDARD L - non-dimming (LED) / A - dimming (DALI) e.g. **XL 17596SS** etc.

EMERGENCY VERSION - prefix catalogue number with:

EXL - Emergency } (Not available when selecting the 'SS' suffix)
TXL - AutoTest

WXL - SmartScan (Only available when selecting the 'SS' suffix)
 e.g. **WXL 17596SS** etc.

Add 0.3kg to weights listed.



Smart version

WEB LINK >
 "PLUG AND PLAY"
 LIGHTING CABLE
 MANAGEMENT



RECESSED LED LUMINAIRES
 FOR GENERAL LIGHTING AND
 VDT ENVIRONMENTS



SPECIFICATION

- Steel body finished full polyester, non-yellowing white
- Window like 'Daylite' panel provides polarised light
- Suitable for VDT intensive environments
- Shallow body depth
- Supplied with side arm suspension kit
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- Fitted with 6500K LEDs

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	6500K
RATED LIFE (HOURS)	100K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>85%
REPLACEABLE	YES
POWER FACTOR	>0.9

LL/CW 118.9

For LED characteristics explanation see
www.thorlux.com/led-guide

SmartScan Configurations



Find out more at www.thorlux.com/smartsan

RECESSED LED LUMINAIRES FOR GENERAL LIGHTING APPLICATIONS



SPECIFICATION

- Steel body finished full polyester, non-yellowing white
- Flat polycarbonate prismatic controller
- Shallow body depth
- Supplied with side arm suspension kit
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- Fitted with 4000K LEDs

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	100K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>85%
REPLACEABLE	YES
POWER FACTOR	>0.9
LL/CW	131.1

For LED characteristics explanation see www.thorlux.com/led-guide

SmartScan Configurations



Find out more at www.thorlux.com/smartsan

RANGE

	NOMINAL SIZE (mm)	LED	CAT. No.	APPROX. kg	CIRCUIT
SMART	600 x 600	20W	XL 17598	6.5	D/SS
		26W	XL 16522	6.5	D/SS
		38W	XL 16523	6.5	D/SS
STANDARD	600 x 600	20W	XL 17599	6.3	L/A
		26W	XL 16524	6.3	L/A
		38W	XL 16525	6.3	L/A

CIRCUIT TYPE - suffix catalogue number with:

SMART D - Smart / SS - SmartScan

STANDARD L - non-dimming (LED) / A - dimming (DALI) e.g. **XL 17598SS** etc.

EMERGENCY VERSION - prefix catalogue number with:


EXL - Emergency (Not available when selecting the 'SS' suffix)

TXL - AutoTest

WXL - SmartScan (Only available when selecting the 'SS' suffix)

e.g. **WXL 17598SS** etc.

Add 0.3kg to weights listed.

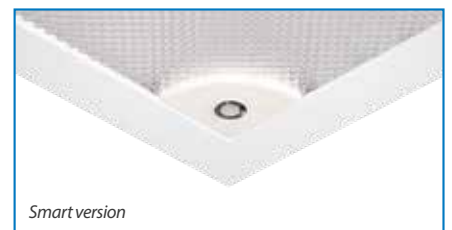

WEB LINK >
"PLUG AND PLAY"
LIGHTING CABLE
MANAGEMENT






LED LIGHT DIFFUSION


XL-FIVE
DAYLITE

XL-FIVE
PRISMATIC

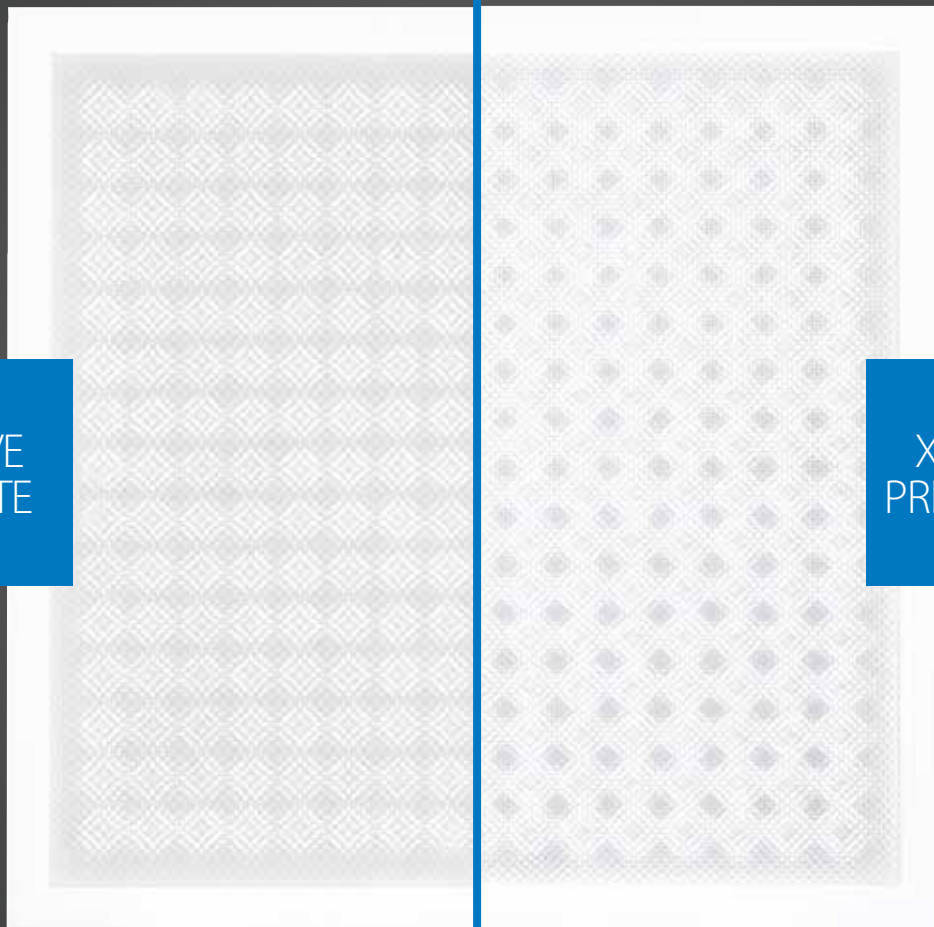


XL-FIVE DAYLITE / XL-FIVE PRISMATIC

PHOTOMETRIC GUIDE - XL-Five Daylite / XL-Five Prismatic



DAYLITE


Luminaire Lumen Output
 20W = 2735lm
 26W = 3425lm
 38W = 4625lm



PRISMATIC

Luminaire Lumen Output
 20W = 3015lm
 26W = 3845lm
 38W = 5280lm

MOUNTING ARRANGEMENTS - XL-Five Daylite / XL-Five Prismatic

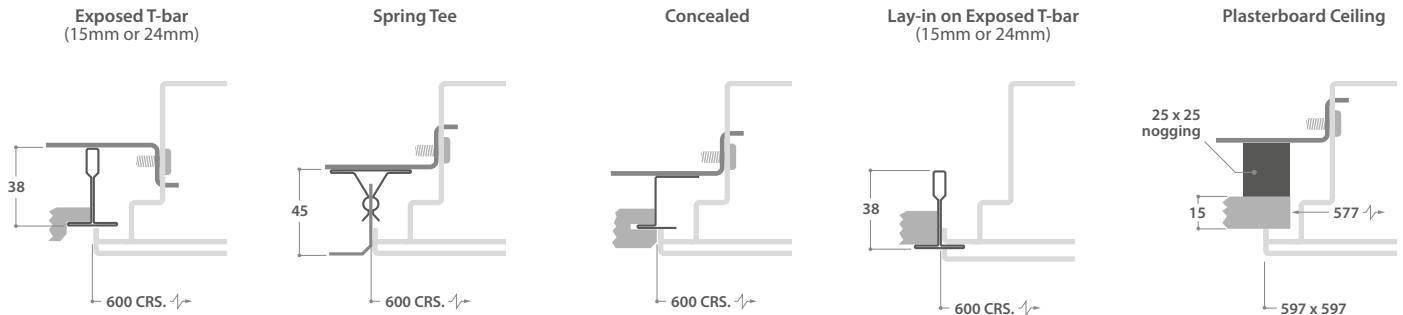

DIMENSIONS - XL-Five Daylite / XL-Five Prismatic

