


CLARA 180





WALL MOUNTED LED UP AND DOWNLIGHTERS

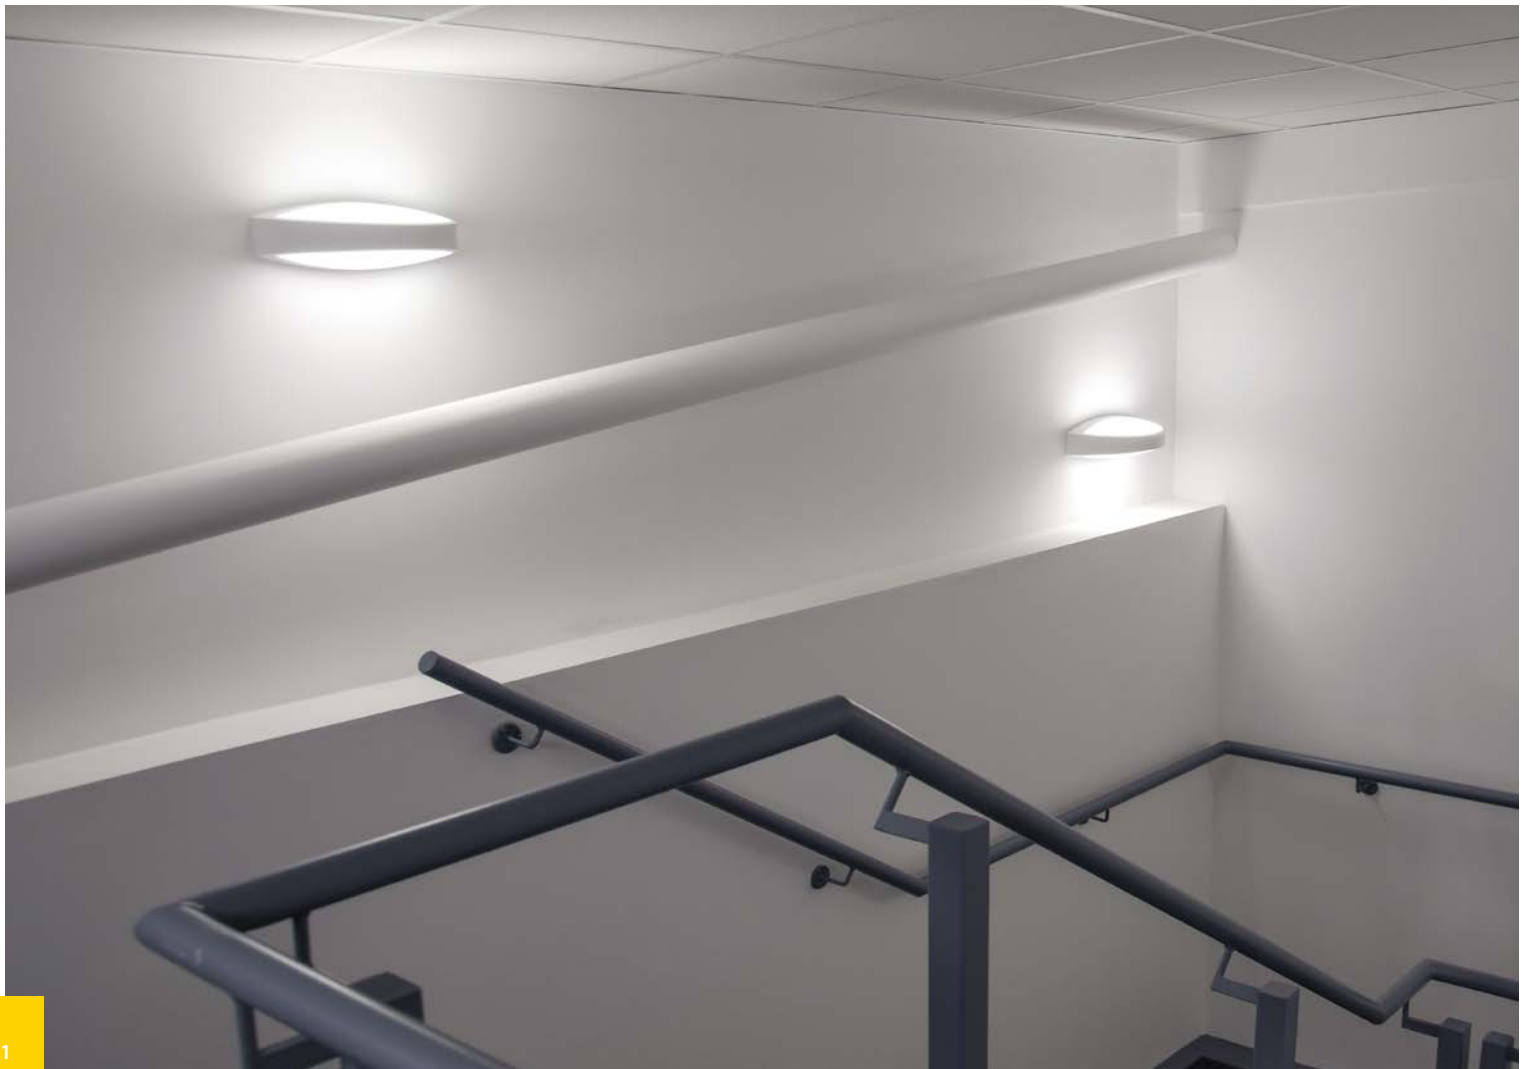

SPECIFICATION

- White injection moulded polycarbonate body (RAL 9016)
- Silver option (RAL 9006)
- High efficiency satin polycarbonate covers
- Can be mounted horizontally or vertically
- Up and downlighter or uplighter only version
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- Fitted with 4000K LEDs

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	63K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>80%
REPLACEABLE	YES
POWER FACTOR	>0.95

LL/CW **114.8**


For LED characteristics explanation see www.thorlux.com/led-guide

SmartScan Configurations



Find out more at www.thorlux.com/smartsan

PHOTOMETRIC GUIDE

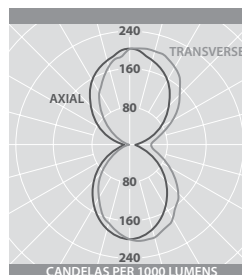

Luminaire Lumen Output
10W = 1430lm
20W = 2640lm

RANGE

	LED	CAT. No.	APPROX. kg	CIRCUIT
SMART	Up and downlighter 20W	CA 19183	1.8	D/SS
	Uplighter 10W	CA 19182	1.7	D/SS
STANDARD	Up and downlighter 20W	CA 15854	1.7	L/A
	Uplighter 10W +	CA 15853	1.6	L/A

CIRCUIT TYPE - suffix catalogue number with:

SMART D - Smart / SS - SmartScan

STANDARD L - non-dimming (LED) / A - dimming (DALI)
e.g. CA 19183SS etc.

EMERGENCY VERSION - prefix catalogue number with:

ECA - Emergency } (Not available when selecting the 'SS' suffix)
TCA - AutoTest

WCA - SmartScan (Only available when selecting the 'SS' suffix)
e.g. WCA 19183SS etc.

Add 0.3kg to weights listed

FINISH OPTION - suffix catalogue number with:

SV3 - Silver e.g. CA 15854LSV3 etc.

+ Can also be used as a downlighter



DIMENSIONS

