

KANBY PRO



**UPLIGHTING
FEATURE**
Diffuser designed to
uplight the ceiling



**WIDE PROFILE
BODY**
Ideal retro-fit solution
for T8 bodies



**NANOPRISM
OPTIC VERSION**
Low glare



**OPAL DIFFUSER
VERSION**
Homogeneously lit



**SCREW-ON
END CAPS**

With concealed fixings and
provision for conduit entry



**INTEGRAL
SMARTSCAN
OPTION**

Increased energy efficiency
and wireless status reporting




**HIGH EFFICIENCY
LED TECHNOLOGY**


OPAL LOW GLARE
133 138
LL/CW LL/CW

DIMENSIONS


1200 versions

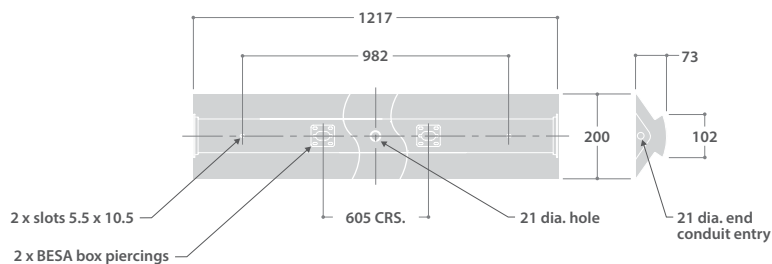

1500 versions

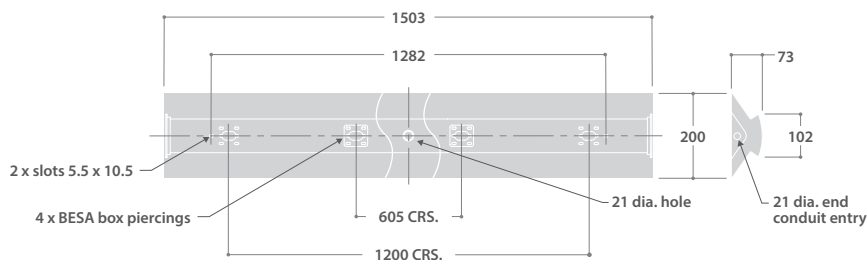


PHOTOMETRIC GUIDE



OPAL VERSION

Luminaire Lumen Output:
15W = 2190lm
26W = 3705lm
22W = 3330lm
36W = 5270lm
43W = 6250lm



LOW GLARE VERSION

Luminaire Lumen Output:
15W = 2280lm
26W = 3860lm
22W = 3470lm
36W = 5490lm
43W = 6510lm

WIDE BODY LED CONTROLLER LUMINAIRES



SPECIFICATION

- Steel body finished full polyester non-yellowing satin white (RAL 9016)
- Polycarbonate diffuser: Carefully controlled nanoprism optic version for LG7:2015 (<3000 cd/m² @ 65°) compliance or opal version
- Polycarbonate screw-on end caps with concealed fixings
- Fire-retardant external plastic parts
- Designed to exclude dust, dirt and flies
- Smart versions with intelligent lighting control
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- Fitted with 4000K LEDs

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	67K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>85%
REPLACEABLE	YES
POWER FACTOR	>0.9
LL/CW	138.8

For LED characteristics explanation see www.thorlux.com/led-guide

SmartScan Configurations



Find out more at www.thorlux.com/smartsan

Smart version

RANGE

	NOMINAL SIZE (mm)	LED	OPAL VERSION	LOW GLARE VERSION	APPROX. kg	CIRCUIT
SMART	1200	15W	KP 18911	KP 18919	5.1	D/SS
		26W	KP 18912	KP 18920	5.1	D/SS
	1500	22W	KP 18916	KP 18924	5.6	D/SS
		36W	KP 18917	KP 18925	5.6	D/SS
		43W	KP 18918	KP 18926	5.6	D/SS
STANDARD	1200	15W	KP 18927	KP 18935	5.0	L/A
		26W	KP 18928	KP 18936	5.0	L/A
	1500	22W	KP 18932	KP 18940	5.5	L/A
		36W	KP 18933	KP 18941	5.5	L/A
		43W	KP 18934	KP 18942	5.5	L/A

CIRCUIT TYPE - suffix catalogue number with:

SMART D - Smart / SS - SmartScan

STANDARD L - non-dimming / A - dimming (DALI) e.g. KP 18911SS etc.

EMERGENCY VERSION - prefix catalogue number with:

EKP - Emergency
TKP - AutoTest (Not available when selecting the 'SS' suffix)

WKP - SmartScan (Only available when selecting the 'SS' suffix)
e.g. WKP 18911SS etc.

Add 0.3kg to weights listed