



IP20 version



IP65 version

ADJUSTABLE EMERGENCY 2 x 3.5W LED TWIN HEAD SPOTLIGHTS FOR OPEN AREAS



SPECIFICATION



- IP20 version with steel body finished silver (RAL 9006)
- IP65 version with light grey polycarbonate gear housing
- Simple to install, full status reporting SmartScan wireless communication versions
- Uses two 3.5W high power LEDs
- 3 hour, non-maintained operation
- Adjustable lamp heads
- Available with narrow (29°) or wide (63°) beam
- Suitable for wall or ceiling mounting

SmartScan Configurations



Find out more at www.thorlux.com/smartsan


DIMENSIONS

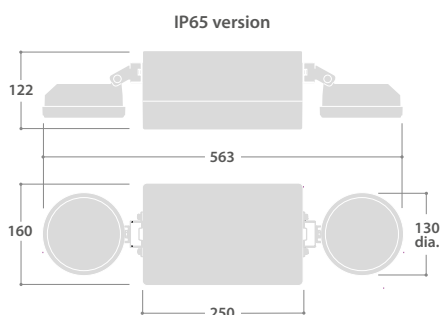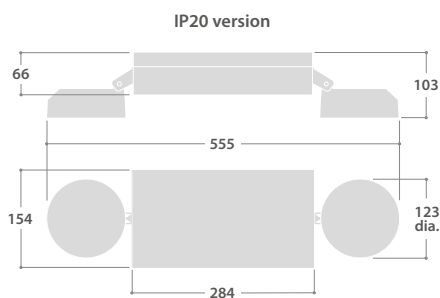

RANGE


	LED	NARROW BEAM VERSION	WIDE BEAM VERSION	DURATION	APPROX. kg	TYPE
IP20	Emergency 2 x 3.5W	ENI 16033	ENI 16034	3-Hour	3.7	Non-maintained
	Auto-Test 2 x 3.5W	TNI 16033	TNI 16034	3-Hour	3.7	Non-maintained
	SmartScan 2 x 3.5W	WNI 16033	WNI 16034	3-Hour	3.8	Non-maintained
IP65	Emergency 2 x 3.5W	ENI 17182	ENI 17183	3-Hour	3.6	Non-maintained
	Auto-Test 2 x 3.5W	TNI 17182	TNI 17183	3-Hour	3.6	Non-maintained
	SmartScan 2 x 3.5W	WNI 17182	WNI 17183	3-Hour	3.7	Non-maintained

PHOTOMETRIC GUIDE



NARROW BEAM

Luminaire Lumen Output
325lm per head



WIDE BEAM

Luminaire Lumen Output
345lm per head