

UNI-SPOT



ADJUSTABLE EMERGENCY 2W LED SPOTLIGHTS FOR OPEN AREAS

IP40 CE LED

SPECIFICATION

- Steel body finished silver
- Emergency and Auto-Test versions
- Simple to install, full status reporting SmartScan wireless communication versions
- Uses single 2W high power LED
- 3 hour, non-maintained operation
- Adjustable lamp head
- Available with narrow (29°) or wide (63°) beam
- Suitable for wall or ceiling mounting

RANGE


LED	NARROW BEAM VERSION	WIDE BEAM VERSION	DURATION	APPROX. kg	TYPE
Emergency 2W	ENI 17498	ENI 17499	3-Hour	1.5	Non-maintained
Auto-Test 2W	TNI 17498	TNI 17499	3-Hour	1.5	Non-maintained
SmartScan 2W	WNI 17498	WNI 17499	3-Hour	1.5	Non-maintained

SmartScan Configurations




Find out more at www.thorlux.com/smartscan

DIMENSIONS

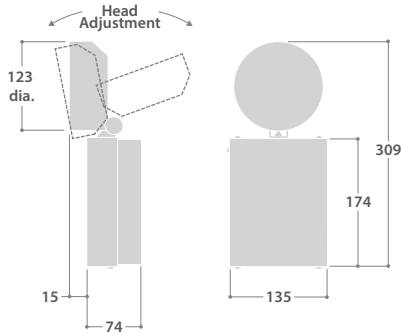


PHOTOMETRIC GUIDE

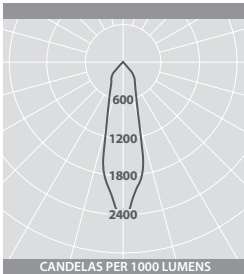

NARROW BEAM

Luminaire Lumen Output:
2W = 260lm

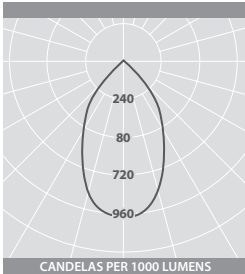

WIDE BEAM

Luminaire Lumen Output:
2W = 260lm