FIREFLY PLUS SURFACE

Standard version

Area version

RANGE

LED POWER	AREA DISTRIBUTION CAT. No.	STANDARD DISTRIBUTION CAT. No.	APPROX. kg	TYPE
4W	**WFF 19317**	**WFF 19316**	0.5	Non-maintained

SPARES

DESCRIPTION	CAT. No.	APPROX. kg
Nickel Metal Hydride (NiMH) battery	**EMB 19515**	0.15

End of life SmartScan batteries can be returned to Thorlux for recycling.

DIMENSIONS

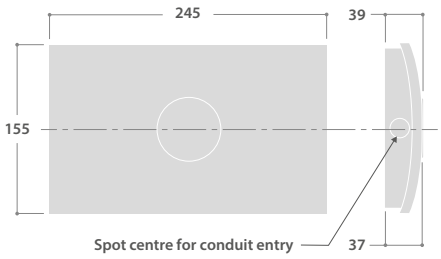

Photometric Performance
see Firefly Plus luminaire

SmartScan Wireless Standards Compliance:

Europe: EN 300 220-1 V2.4.1 / EN 301 489-3 V1.6.1

Australasia: ACMA 2014 Radio Communication Standard 2014

Thorlux Patented Wireless Technology - GB2575724

5 YEAR BATTERY WARRANTY*

** SmartScan versions only*

HIGH OUTPUT EMERGENCY LUMINAIRES FOR SURFACE MOUNTING WITH SMARTSCAN WIRELESS TECHNOLOGY

IP54 CE LED

SPECIFICATION

- Polycarbonate body finished white (RAL9016)
- Three hour, non-maintained emergency operation
- Stand-alone self-test and full SmartScan wireless communication compatible
- Suitable for higher mounting applications
- Aids compliance with BS5266-1:2016 for areas where enhanced illuminance is needed at specific locations
- Reliable LED technology
- Low standby power consumption (1.7W total)
- Superb photometric performance
- Status indicator shows operational condition
- Reliable Nickel Metal Hydride (NiMH) battery technology

At Platform 1 SmartScan emergency luminaires may self-test at any time. Consequently, caution should be exercised in situations where this may be inconvenient (such as hotel rooms or hospital wards). At Platform 2 specific testing times can be set via the SmartScan website (SmartScan Gateway required).

SmartScan Configurations

Find out more at **www.thorlux.com/smartscan**