

CIRCULAR LIGATURE-RESISTANT SURFACE LED LUMINAIRES



SPECIFICATION

- Strong die-cast aluminium body and spun aluminium cover frame finished full polyester non-yellowing satin white (RAL 9016)
- Silver finish option
- Satin polycarbonate front cover
- Cover secured using tamper-resistant pin Torx screws (Requires T30 tool - see Accessory table below)
- Fitted with 4000K LEDs



LED CHARACTERISTICS

CRI	80
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	67K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>90%
REPLACEABLE	YES
POWER FACTOR	>0.95
LL/CW	87.6

For LED characteristics explanation see www.thorlux.com/led-guide

RANGE

LED	CAT. No.	APPROX. kg	CIRCUIT
16W	CT 16114	3.4	L/A

CIRCUIT TYPE - suffix catalogue number with:

L - non-dimming (LED) / **A** - dimming (DALI) e.g. **CT 16114L** etc.


SILVER OPTION - add suffix **SV3** e.g. **CT 16114LSV3** etc.

EMERGENCY VERSION - prefix catalogue number with:

ECT - Emergency / **TCT** - AutoTest e.g. **ECT 16114L** etc.

Add 0.3kg to weights listed.


DIMENSIONS

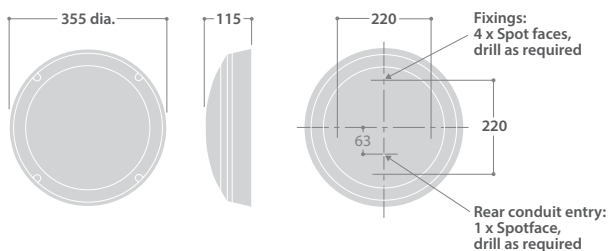

ACCESSORY

DESCRIPTION	CAT. No.
T30 pin Torx bit (<i>Suitable for magnetic bit holder</i>)	KEY 16977

PHOTOMETRIC GUIDE



Luminaire Lumen Output
16W = 1665lm