

Ceiling Mounted

Wall Mounted

Suspension Mounted

Cantilever Mounted

LEGEND OPTIONS

ISO 7010 Double Sided *



EURO Double Sided *



ISO 7010 Single Sided



EURO Single Sided



* Suitable for wall mount applications. Legend can be inserted as arrow left or arrow right.

OPTIONAL MOUNTING KITS

All other methods (as shown) supplied as standard


| DESCRIPTION | CAT. No. | APPROX. kg |
|--|-----------------|------------|
| Suspension mounting kit | LX 17421 | 0.2 |
| Cantilever mounting bracket | LX 19448 | 0.1 |
| Back plate kit (To mask wall when retrofitting) | LX 19691 | 0.2 |

SPARES

| DESCRIPTION | CAT. No. | APPROX. kg |
|-------------------------------------|----------------|------------|
| Nickel Metal Hydride (NiMH) battery | EMB 617 | 0.15 |

End of life SmartScan batteries can be returned to Thorlux for recycling.

DIMENSIONS

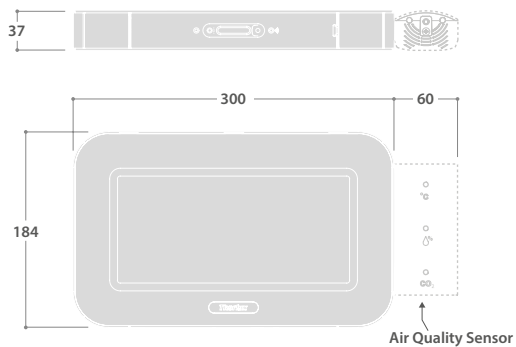

Air quality sensor connected to the Lexi



EMERGENCY EXIT SIGNS WITH DEDICATED SMARTSCAN WIRELESS TECHNOLOGY VERSIONS



SPECIFICATION

- Polycarbonate body finished white (RAL9016) with acrylic legend panel
- Silver bezel option
- Uses long life LEDs
- Three hour, maintained emergency operation
- Simple to install, full status reporting SmartScan wireless communication versions
- Low power consumption (1.7W total)
- Ceiling or wall mounted
- Optional 3m wire suspension kit or cantilever mounting bracket
- Integral downlight for exit illumination
- Choice of legends
- Status indicator shows operational condition
- Hinged battery compartment (requires tool access) provides fast battery replacement
- Reliable Nickel Metal Hydride (NiMH) battery technology
- Available with a factory-fitted SmartScan Air Quality Sensor. (See Air Quality Sensor data sheet for more details)

At Platform 1 SmartScan emergency luminaires may self-test at any time. Consequently, caution should be exercised in situations where this may be inconvenient (such as hotel rooms or hospital wards). At Platform 2 specific testing times can be set via the SmartScan website (SmartScan Gateway required).

SmartScan Configurations



Find out more at www.thorlux.com/smartscan



RANGE

| ISO 7010 LEGEND | CAT. No | EURO LEGEND | CAT. No | APPROX. kg | TYPE |
|------------------|------------------|-------------|------------------|------------|--------------|
| SmartScan | | | | | |
| A | WLX 17463 | D | WLX 17460 | 1.0 | Maintained ▲ |
| B | WLX 17464 | E | WLX 17461 | 1.0 | Maintained ▲ |
| C | WLX 17465 | F | WLX 17462 | 1.0 | Maintained ▲ |
| AutoTest | | | | | |
| A | TLX 17463 | D | TLX 17460 | 1.0 | Maintained ▲ |
| B | TLX 17464 | E | TLX 17461 | 1.0 | Maintained ▲ |
| C | TLX 17465 | F | TLX 17462 | 1.0 | Maintained ▲ |
| Emergency | | | | | |
| A | ELX 17463 | D | ELX 17460 | 1.0 | Maintained ▲ |
| B | ELX 17464 | E | ELX 17461 | 1.0 | Maintained ▲ |
| C | ELX 17465 | F | ELX 17462 | 1.0 | Maintained ▲ |

▲ Wire link may be removed to enable non-maintained operation

FINISH OPTIONS - suffix catalogue number with: **SV3** - Silver e.g. **WLX 17463 SV3** etc.

NOTE - Available with a SmartScan Air Quality Sensor pre-fitted - suffix catalogue number with: **AQS** e.g. **WLX17463AQS**

SmartScan Wireless Standards Compliance:

Europe: EN 300 220-1 V2.4.1 / EN 301 489-3 V1.6.1

Australasia: ACMA 2014 Radio Communication Standard 2014

Thorlux Patented Wireless Technology - GB2575724

5
YEAR

BATTERY WARRANTY*

* SmartScan versions only