



BROAD DISTRIBUTION

General area lighting up to typically 5m

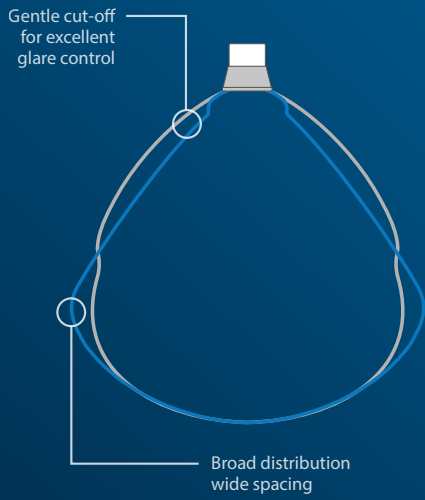

NARROW DISTRIBUTION

Ideal for rack lighting up to typically 7m

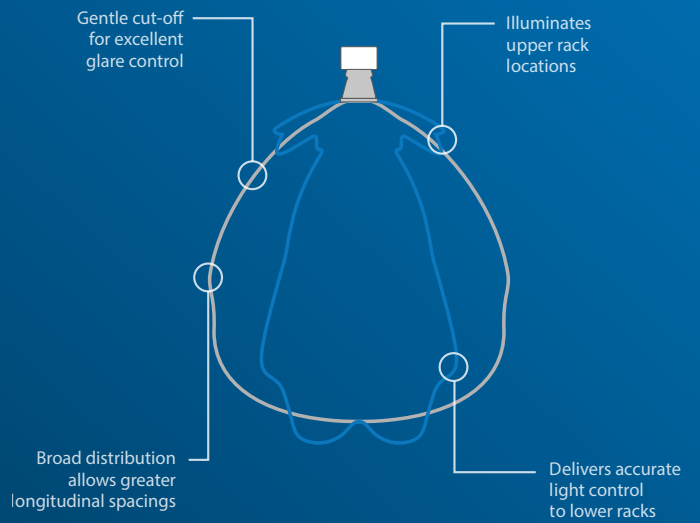



Broad distribution version

Narrow distribution version

REFLECTOR LUMINAIRES FOR INDUSTRIAL APPLICATIONS



SPECIFICATION

- Steel body and end caps finished full polyester, non-yellowing white
- Extremely efficient steel reflector finished white provides low glare illumination
- Smart versions with intelligent lighting control for use up to 8 metres mounting height
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- High quality control gear and LEDs designed to achieve 100,000 hour life expectancy
- Fitted with 4000K LEDs

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	100K - L70/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	90%
REPLACEABLE	YES
POWER FACTOR	>0.95

LL/CW **157.5**

For LED characteristics explanation see www.thorlux.com/led-guide

SmartScan Configurations



Find out more at www.thorlux.com/smartsan

RANGE

	LENGTH (mm)	LED	BROAD DISTRIBUTION	NARROW DISTRIBUTION	FIXINGS	APPROX. kg	CIRCUIT
SMART	1558	22W	KB 19640	KB 19643	Suitable for BESA fixing on 600 to 610mm centres	4.1	D/SS
		30W	KB 19641	KB 19644			D/SS
		52W	KB 19642	KB 19645			D/SS
STANDARD	1508	22W	KB 19646	KB 19649	As above	4.0	L/A
		30W	KB 19647	KB 19650			L/A
		52W	KB 19648	KB 19651			L/A

CIRCUIT TYPE - suffix catalogue number with:

SMART D - Smart / SS - SmartScan

STANDARD L - non-dimming (LED) / A - dimming (DALI) e.g. **KB 19640SS** etc.

EMERGENCY VERSION - prefix catalogue number with:

EKB - Emergency (Not available when selecting the 'SS' suffix)



TKB - AutoTest

WKB - SmartScan (Only available when selecting the 'SS' suffix)

e.g. **WKB 19640SS** etc.

Add 0.3kg to weights listed

PHOTOMETRIC GUIDE



BROAD DISTRIBUTION

Luminaire Lumen Output:
22W = 3920lm
30W = 5355lm
52W = 9115lm

NARROW DISTRIBUTION

Luminaire Lumen Output:
22W = 3840lm
30W = 5240lm
52W = 8925lm

DIMENSIONS

