



DIMENSIONS

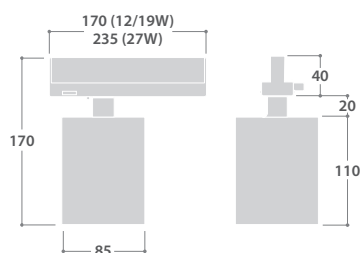

PHOTOMETRIC GUIDE

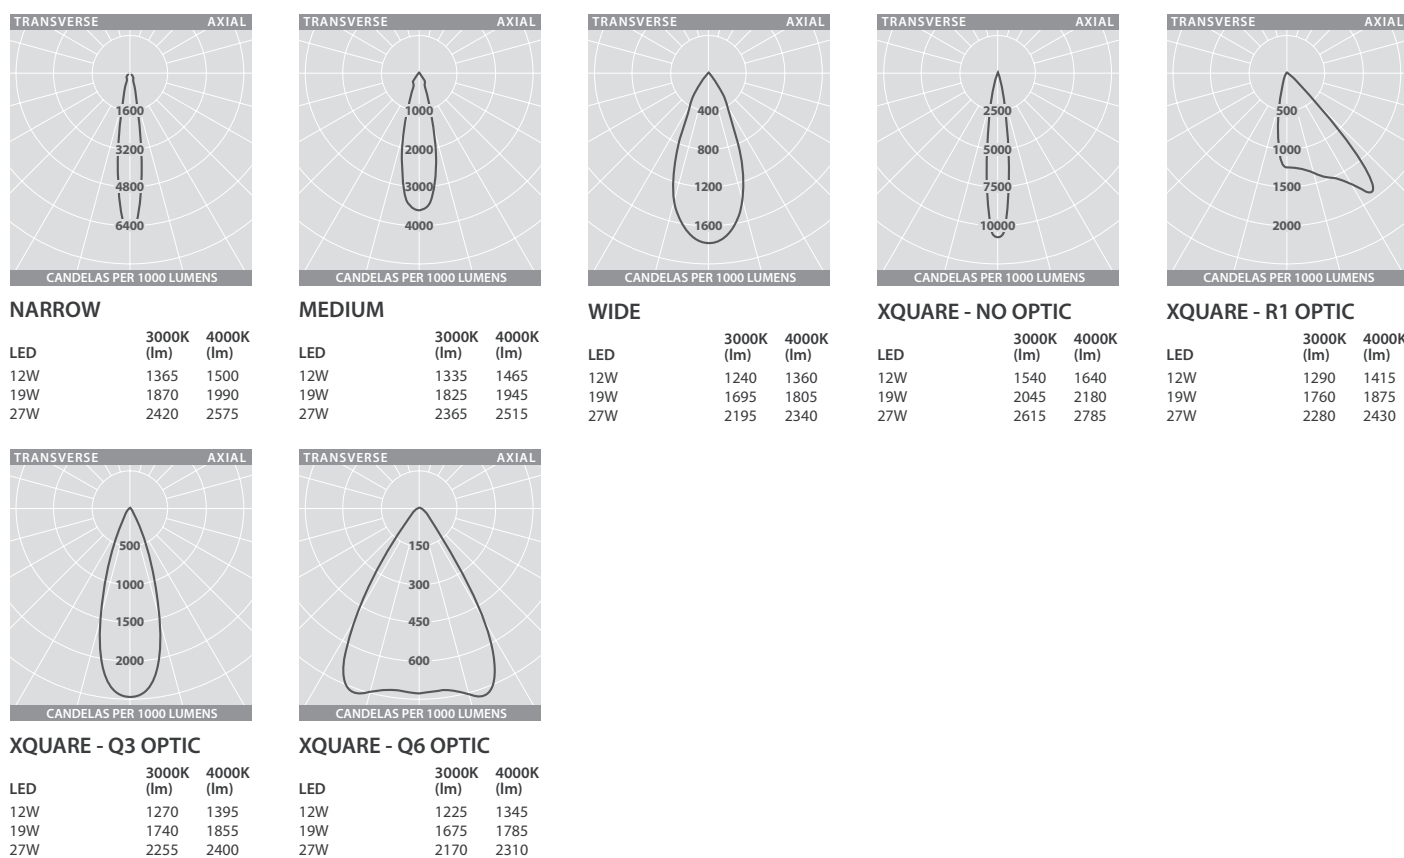

CONFIGURATOR

PRODUCT CODE	SIZE	WATTAGE	REFLECTOR	LIGHT COLOUR	BODY COLOUR	CONTROL TYPE
GX Grafix	M Medium	12 12W	N Narrow	3 3000K	W White	A Dimming (DALI)
		19 19W	M Medium	4 4000K	B Black	L Non-dimming
		27 27W	W Wide			
			X Xquare			
E.g. GXM19X3BA						
GX Grafix	M Medium	19 19W	X Xquare	3 3000K	B Black	A Dimming (DALI)

XQUARE ACCESSORIES

DESCRIPTION	CAT. NO.
R1 optic	GX19742
Q3 optic	GX19743
Q6 optic	GX19744



TRACK MOUNTED ADJUSTABLE SPOTLIGHTS



SPECIFICATION

- Aluminium body and bracket
- High performance diamond faceted reflector with 18°, 38°, and 44° beam angle versions
- Xquare optics with interchangeable Xquare performance lenses
- 350° azimuth adjustment
- 90° vertical adjustment
- Full polyester powder coat in black or white, silver to special order
- Designed for installation into 3-circuit or DALI 3-circuit track
- Fitted with CRI 90 LEDs, suitable for retail applications
- 3000K and 4000K versions

LED CHARACTERISTICS

CRI	90+
COLOUR TEMPERATURE	3000K/4000K
RATED LIFE (HOURS)	83K - L80/B10
PROTECTION	-
DRIVER EFFICIENCY	>86%
REPLACEABLE	NO
POWER FACTOR	>0.95

LL/CW 117.1


For LED characteristics explanation see
www.thorlux.com/led-guide

Two body colour options




Light **exactly** where you want it


Narrow

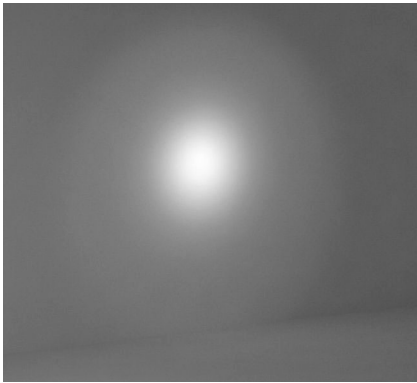

Medium

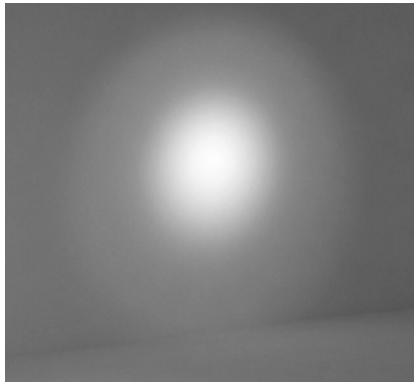


Wide

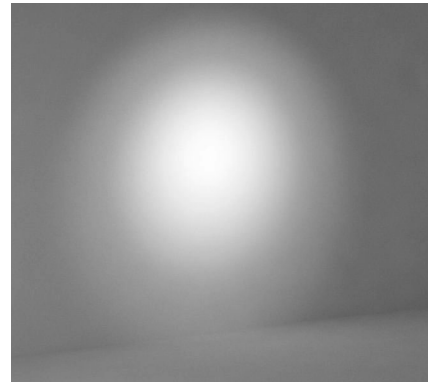

Xsquare - No optic



Xsquare - R1 optic

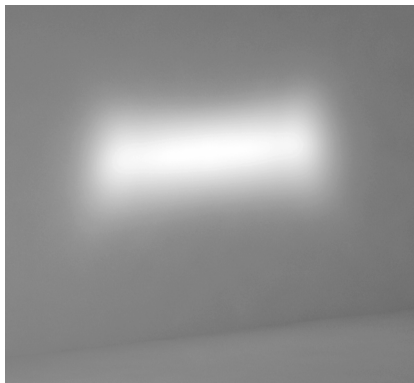


Xsquare - Q3 optic



Xsquare - Q6 optic



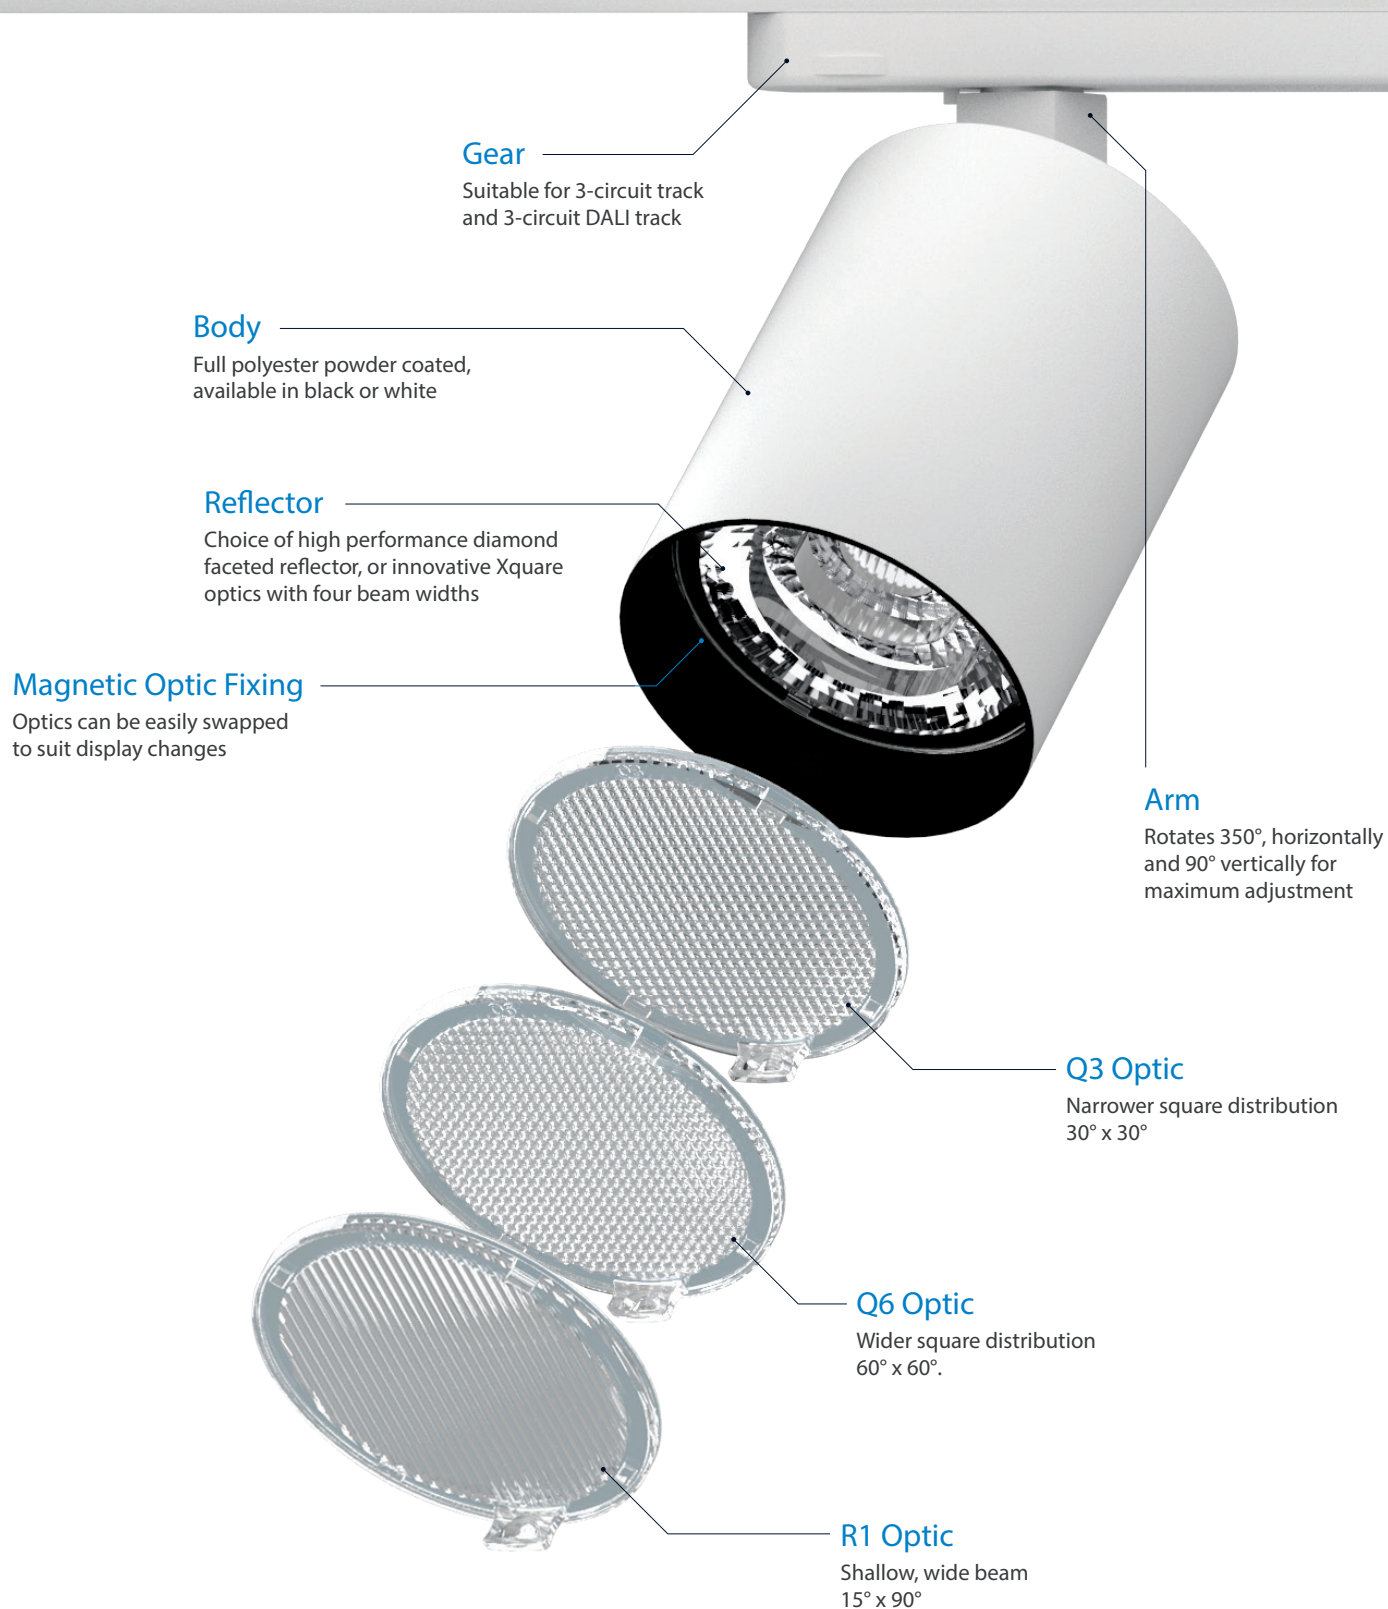

Not your
average spotlight