





PHOTOMETRIC GUIDE



30W


Luminaire Lumen Output:
30W = 4820 lm



60W

Luminaire Lumen Output:
60W = 9470 lm

ACCESSORIES

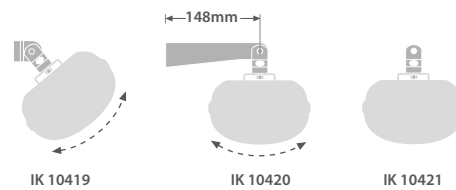

DESCRIPTION

- IP65 20mm weatherproof compression gland kit with sealing washers
- Stainless steel adjustable bracket (Short) - two per pack
- Stainless steel adjustable bracket (148mm long) - two per pack
- Stainless steel adjustable hook - two per pack
- Stainless steel cover clip - ten required per luminaire


CAT. No.


APPROX. kg

IP65 20mm weatherproof compression gland kit with sealing washers	IK 6389	0.02
Stainless steel adjustable bracket (Short) - two per pack	IK 10419	0.13
Stainless steel adjustable bracket (148mm long) - two per pack	IK 10420	0.24
Stainless steel adjustable hook - two per pack	IK 10421	0.05
Stainless steel cover clip - ten required per luminaire	TP 10541	



DIMENSIONS

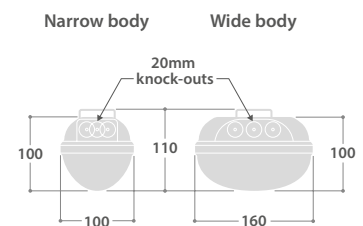



DIRECT

Pair of stainless steel brackets supplied. Provides clearance for thermal expansion and fixing.



PENDANT

Pair of steel spring loops supplied

ANTI-CORROSIVE POLYCARBONATE LUMINAIRES



SPECIFICATION

- High-impact and corrosion-resistant light grey, injection moulded polycarbonate body
- Frosted prismatic polycarbonate cover
- Body and cover fire-retardant
- Smooth easy-clean lines
- Snug-fit polycarbonate cover clips (stainless steel option)
- Fast installation via external stainless-steel brackets preserves IP rating
- Complies with M.O.D. JSP482 Chapter 8 Document for 'Category C' areas
- Complies with food production standards IFS and HACCP
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- Fitted with 4000K LEDs

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	100K - L70/B10
PROTECTION	-
DRIVER EFFICIENCY	>88%
REPLACEABLE	YES
POWER FACTOR	>0.95
LL/CW	131.5

For LED characteristics explanation see www.thorlux.com/led-guide



Wide body

Narrow body

RANGE

LENGTH (mm)	LED	CAT. No.	CIRCUIT	FIXINGS	APPROX. kg
1570	30W ■	TP 19773	SS/D/L	1150mm centres	2.6
	60W ▲	TP 19774	SS/D/L		3.6

FACTORY FITTED THROUGH WIRING - add 'TW' after catalogue number eg. **TP 19773LTW**

CIRCUIT TYPE - suffix catalogue number with:

SS - SmartScan / **D** - Smart / **L** - non-dimming (LED) e.g. **TP 19773SS** etc.
SmartScan and Smart add 0.1kg to weights listed.

EMERGENCY VERSION - prefix catalogue number with:

ETP - Emergency } (Not available when selecting the 'SS' suffix)
TTP - AutoTest

WTP - SmartScan (Only available when selecting the 'SS' suffix)
e.g. **WTP 19773SS** etc.

Add 0.3kg to weights listed.

- Narrow body
- ▲ Wide body

AMBIENT OPERATING TEMPERATURES

LED	STANDARD/SMART		EMERGENCY	
	MINIMUM	MAXIMUM	MINIMUM	MAXIMUM
30W	-20°C	50°C	0°C	25°C
60W	-20°C	40°C	0°C	25°C

For ambient temperatures below the stated minimum contact the Thorlux Technical department

SmartScan Configurations



Find out more at www.thorlux.com/smartsan