



CLARA 360

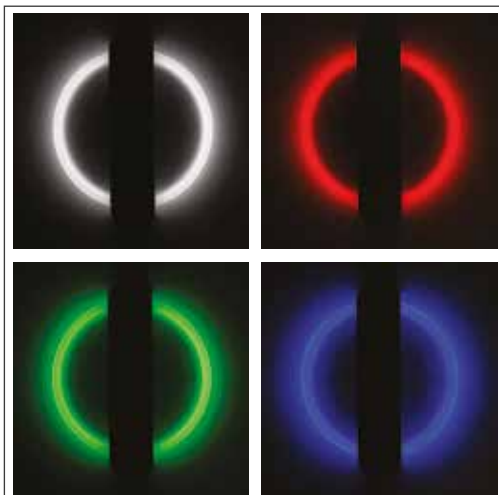

CHOOSE YOUR COLOUR

Clara 360 is available with a separately switched 3W LED backlit halo in white or RGB. The ability to switch the colour of each half of the luminaire individually makes the Clara 360 extremely versatile. Different colour and pattern combinations can be used to clearly define separate floors or areas of a building or could simply be used to create an effect along a corridor or up a flight of stairs.


DIMENSIONS

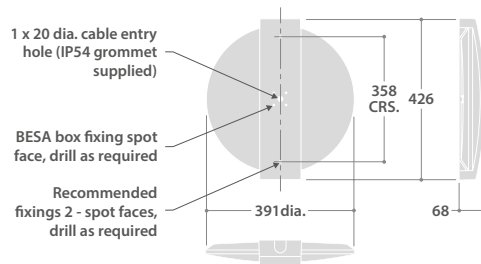

PHOTOMETRIC GUIDE



Luminaire Lumen Output
20W = 3050lm

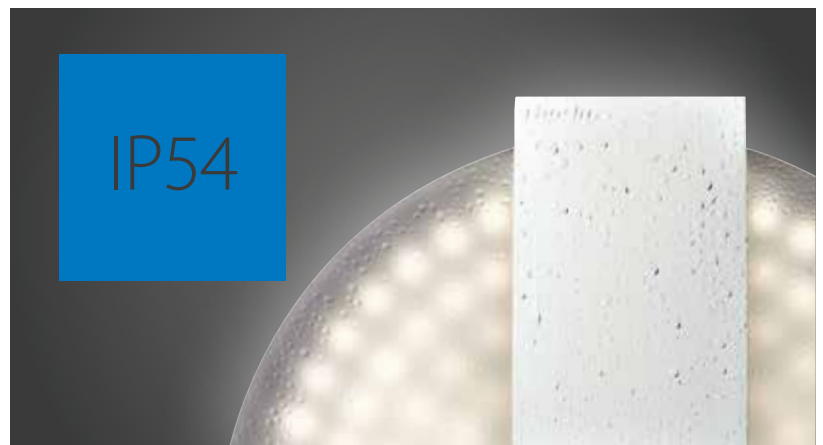



CIRCULAR LED LUMINAIRES SUITABLE FOR WALL OR CEILING MOUNTING



SPECIFICATION

- Die-cast aluminium body and lid finished full polyester non-yellowing satin white (RAL 9016)
- Silver option (RAL 9006)
- High efficiency satin sparkle effect polycarbonate covers
- Optional 3W LED backlight (RGB or white)
- 100,000 hour life expectancy
- Emergency and AutoTest versions using two integral 1W high power LEDs
- Smart versions with intelligent lighting control
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- Fitted with 4000K LEDs

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	100K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>87%
REPLACEABLE	YES
POWER FACTOR	>0.95
LL/CW	132.6

For LED characteristics explanation see www.thorlux.com/led-guide

RANGE

	LED	STANDARD	APPROX. kg	WHITE LED HALO	RGB LED HALO	APPROX. kg	CIRCUIT
SMART	20W	CA 15626	3.2	CA 15637	CA 15631	3.3	D/SS
STANDARD	20W	CA 15625	3.1	CA 15634	CA 15628	3.2	L/A

CIRCUIT TYPE - suffix catalogue number with:

SMART D - Smart / SS - SmartScan

STANDARD L - non-dimming (LED) / A - dimming (DALI) e.g. CA 15626SS etc.

EMERGENCY VERSION - prefix catalogue number with:

ECA - Emergency } (Not available when selecting the 'SS' suffix)

TCA - AutoTest

WCA - SmartScan (Only available when selecting the 'SS' suffix)

e.g. WCA 15626SS etc.

Add 0.3kg to weights listed.

FINISH OPTION - suffix catalogue number with: SV3 - Silver RAL 9006 e.g. CA 15626DSV3 etc.

SmartScan Configurations



Find out more at www.thorlux.com/smartsan