




RECESSED COLOUR TEMPERATURE CHANGING LUMINAIRE WITH DOMED POLYCARBONATE DIFFUSER

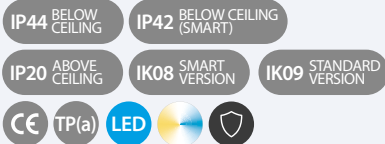

SPECIFICATION

- Steel body finished full polyester, non-yellowing white
- Shallow body depth
- Domed diffuser provides wall and ceiling illumination
- Suitable for most ceiling types. Lay-in or pull-up with side arm suspensions (included with LED versions)
- Designed to exclude dust, dirt and flies. All control gear is outside the lamp enclosure
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit (CA versions)
- Fitted with 3000K and 6500K LEDs for colour temperature control

SmartScan Configurations



Find out more at www.thorlux.com/smartscan

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	3000K to 6500K
RATED LIFE (HOURS)	67K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>85%
REPLACEABLE	YES
POWER FACTOR	>0.9

LL/CW 118.6

For LED characteristics explanation see www.thorlux.com/led-guide

RANGE

COLOURACTIVE LUMINAIRE - with integral wireless SmartScan Sensor

NOMINAL SIZE (mm)	LED	CAT. No.	APPROX. kg
600 X 600	16W	SD 18807CA	6.9
	31W	SD 18808CA	6.9
	41W	SD 19138CA	6.9

COLOURCONTROL LUMINAIRE - for use with SmartScan Stand-alone Sensor

NOMINAL SIZE (mm)	LED	CAT. No.	APPROX. kg
600 X 600	16W	SD 17247CC	6.7
	31W	SD 17248CC	6.7
	41W	SD 19139CC	6.7

EMERGENCY VERSION - prefix catalogue number with:

ESD - Emergency (Only available when selecting the 'CC' suffix)
TSD - AutoTest


WSD - SmartScan (Only available when selecting the 'CA' suffix)

e.g. **WSD 18807CA** etc.

Add 0.3kg to weights listed



DIMENSIONS

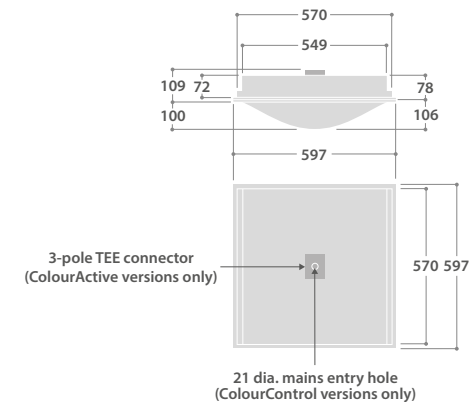

WEB LINK >

"PLUG AND PLAY"
LIGHTING CABLE
MANAGEMENT

