

KIOPS

LED surface-mounted downlight for outdoor use.

Anodized aluminium LED projector equipped with 1 high-emission LED.

Kirops surface is available in different versions with varying powers, colour temperatures and beam angles.

Integrated driver (ON-OFF). UGR<19



3000K - 14W | 21°

LAMPING

Source	LED spot
Total power	14W
Emission	Direct 21°
Tension	220/240V
Color temperature	3000K
Luminous flux	1500lm
Initial luminaire efficacy	> 100lm/W
Initial chromaticity	SDCM < 3
Typ cri	80
Energy class	A+
Ip class	65
Dimensions	ø14x22,1cm
Materials	Aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver included
Customization options	Colour temperatures, finishings
Net lamp weight	2,25 kg

Codes

MKIR0901502WGP

Structure


grey

PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

Certificazioni

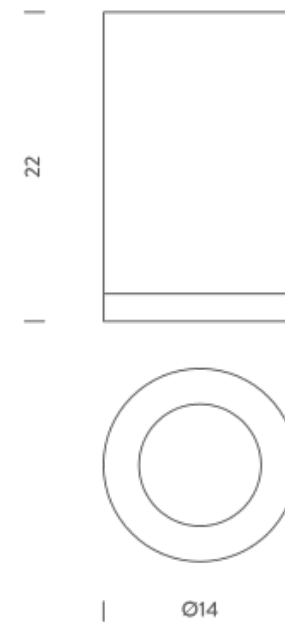

3000K - 14W | 44°

LAMPING

Source	LED spot
Total power	14W
Emission	Direct 44°
Tension	220/240V
Color temperature	3000K
Luminous flux	1500lm
Initial luminaire efficacy	> 100lm/W
Initial chromaticity	SDCM < 3
Typ cri	80
Energy class	A+
Ip class	65
Dimensions	ø14x22,1cm
Materials	Aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver included
Customization options	Colour temperatures, finishings
Net lamp weight	2,25 kg

Codes

MKIR0901802WGP

Structure


grey

PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

Certificazioni

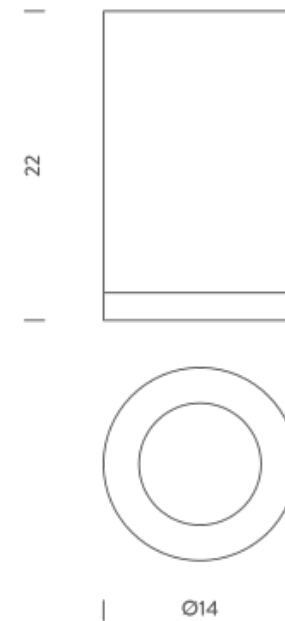

3000K - 19W | 21°

LAMPING

Source	LED spot
Total power	19W
Emission	Direct 21°
Tension	220/240V
Color temperature	3000K
Luminous flux	2000lm
Initial luminaire efficacy	> 100lm/W
Initial chromaticity	SDCM < 3
Typ cri	80
Energy class	A+
Ip class	65
Dimensions	ø14x22,1cm
Materials	Aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver included
Customization options	Colour temperatures, finishings
Net lamp weight	2,25 kg

Codes

MKIR0902502WGP

Structure


grey

PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

Certificazioni

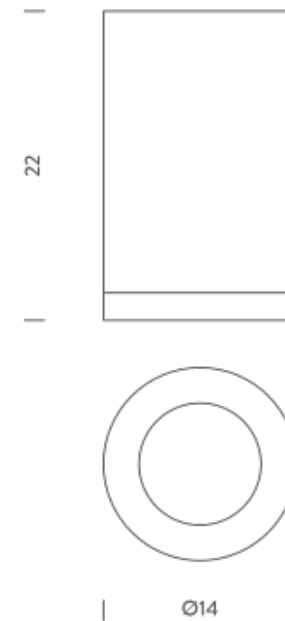

3000K - 19W | 44°

LAMPING

Source	LED spot
Total power	19W
Emission	Direct 44°
Tension	220/240V
Color temperature	3000K
Luminous flux	2000lm
Initial luminaire efficacy	> 100lm/W
Initial chromaticity	SDCM < 3
Typ cri	80
Energy class	A+
Ip class	65
Dimensions	ø14x22,1cm
Materials	Aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver included
Customization options	Colour temperatures, finishings
Net lamp weight	2,25 kg

Codes

MKIR0902802WGP

Structure


grey

PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

Certificazioni

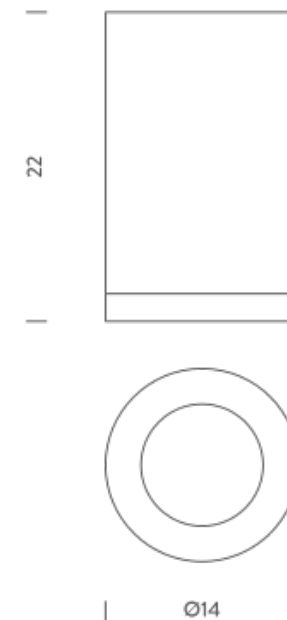

4000K - 14W | 21°

LAMPING

Source	LED spot
Total power	14W
Emission	Direct 21°
Tension	220/240V
Color temperature	4000K
Luminous flux	1500lm
Initial luminaire efficacy	> 100lm/W
Initial chromaticity	SDCM < 3
Typ cri	80
Energy class	A+
Ip class	65
Dimensions	ø14x22,1cm
Materials	Aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver included
Customization options	Colour temperatures, finishings
Net lamp weight	2,25 kg

Codes

MKIR0901502NGP

Structure


grey

PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

Certificazioni

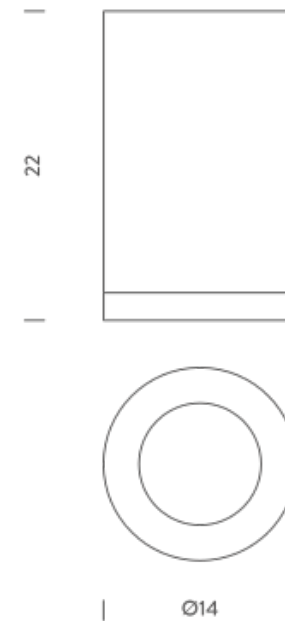

4000K - 14W | 44°

LAMPING

Source	LED spot
Total power	14W
Emission	Direct 44°
Tension	220/240V
Color temperature	4000K
Luminous flux	1500lm
Initial luminaire efficacy	> 100lm/W
Initial chromaticity	SDCM < 3
Typ cri	80
Energy class	A+
Ip class	65
Dimensions	ø14x22,1cm
Materials	Aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver included
Customization options	Colour temperatures, finishings
Net lamp weight	2,25 kg

Codes

MKIR0901802NGP

Structure


grey

PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

Certificazioni

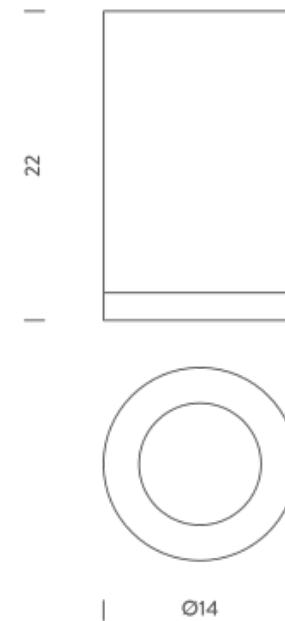

4000K - 19W | 21°

LAMPING

Source	LED spot
Total power	19W
Emission	Direct 21°
Tension	220/240V
Color temperature	4000K
Luminous flux	2000lm
Initial luminaire efficacy	> 100lm/W
Initial chromaticity	SDCM < 3
Typ cri	80
Energy class	A+
Ip class	65
Dimensions	ø14x22,1cm
Materials	Aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver included
Customization options	Color temperatures, finishings
Net lamp weight	2,25 kg

Codes

MKIR0902502NGP

Structure


grey

PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

Certificazioni

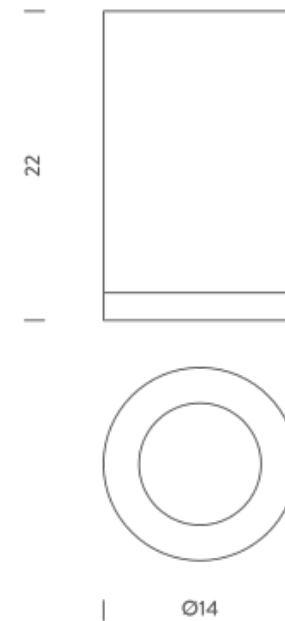

4000K - 19W | 44°

LAMPING

Source	LED spot
Total power	19W
Emission	Direct 44°
Tension	220/240V
Color temperature	4000K
Luminous flux	2000lm
Initial luminaire efficacy	> 100lm/W
Initial chromaticity	SDCM < 3
Typ cri	80
Energy class	A+
Ip class	65
Dimensions	ø14x22,1cm
Materials	Aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver included
Customization options	Colour temperatures, finishings
Net lamp weight	2,25 kg

Codes

MKIR0902802NGP

Structure

grey

PACKAGE

Package 01

Dimension: 31x23x22 cm / Gross weight: 2,5 kg

Certificazioni

