



ColourActive Gateway

MASTER COLOUR TEMPERATURE
CONTROL AND WEB INTERFACE
FOR COLOURACTIVE LUMINAIRES




SPECIFICATION

- Polycarbonate body finished white (RAL9016), silicone keypad
- Central control for ColourActive luminaires
- Communicates with the SmartScan website using GSM mobile telecommunications
- Wireless control of incremental shifts in colour temperature governed by settings on the SmartScan website

RANGE

DESCRIPTION	CAT. No.	APPROX. kg
ColourActive Gateway	SS 18548	1.0

DIMENSIONS

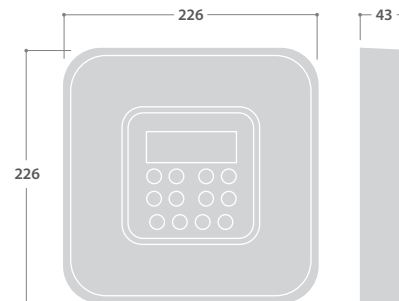

SmartScan Wireless Standards Compliance:
Europe: EN 300 220-1 V2.4.1 / EN 301 489-3 V1.6.1
Australasia: ACMA 2014 Radio Communication Standard 2014
Thorlux Patented Wireless Technology - GB2575724

A ColourActive Gateway only provides colour temperature control. If energy monitoring and status information feedback is required an additional SmartScan Gateway is required.