



LIGHTING CABLE MANAGEMENT - SMART

6-POLE INTERCONNECTING LEADS FOR USE WITH SMART RECESSED LUMINAIRES



SPECIFICATION

- Thorlux UK designed and manufactured
- LS0H - low smoke zero halogen cables
- Leads can be plugged together to extend wiring
- Future flexibility - plug and play
- Twin latch design - strong strain relief
- Constructed from flame retardant nylon
- Compliance with new standard BS EN 61535:2013



Connection lead
6-pole connectors with 6-core cable 1.5mm²
3m - LCM 10739T
4m - LCM 11030T
6m - LCM 11003T



Starter lead
6-pole mains plug with 4-core input cable stripped at one end 1.5mm²
3m - LCM 12749T



Signal-Isolator
6-pole
LCM 10803T



Connector
6-pole
Live end (for connection to luminaire) - LCM 13219T
Dead end (for connection from luminaire) - LCM 11820T




Connection lead
3-pole plug with 3-core cable stripped at one end 0.75mm² (for non factory fitted luminaires)
3m - LCM 14822



Hub extension lead
3-pole connectors with 3-core cable 1.5mm²
3m - LCM 14823



Circuit splitter
LCM 14928

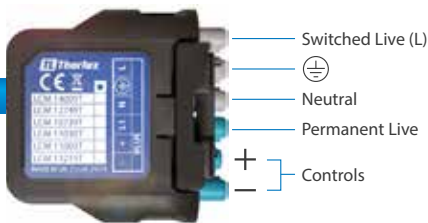

NOTE:
If modular wiring is not required please suffix luminaire catalogue number with NT e.g. XL 18306DNT