



SMARTSCAN GATEWAY



MASTER CONTROL AND WEB INTERFACE WITH SMARTSCAN WIRELESS COMMUNICATION




SPECIFICATION

- Polycarbonate body finished white (RAL9016), silicone keypad
- Central monitoring for up to 250 SmartScan and SmartScan emergency luminaires. Extra Gateways can be fitted to accommodate more luminaires
- Central time control for SmartScan External luminaires
- Allows user to manually initiate emergency lighting tests
- Password protected
- Communicates with the SmartScan website using GSM mobile telecommunications
- Scheduled emergency test times / dates managed using the SmartScan website

RANGE

DESCRIPTION	CAT. No.	APPROX. kg
SmartScan Gateway	SS 17486	1.0

DIMENSIONS

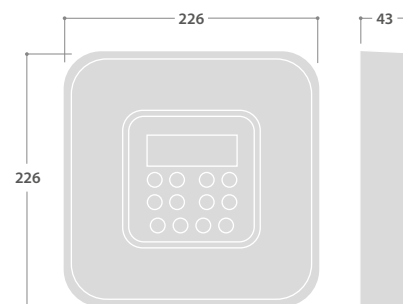

SmartScan Wireless Standards Compliance:

Europe: EN 300 220-1 V2.4.1 / EN 301 489-3 V1.6.1

Australasia: ACMA 2014 Radio Communication Standard 2014

Thorlux Patented Wireless Technology - GB2575724