



SMARTSCAN TOUCH



WIRELESS SCENE CONTROL OF SMARTSCAN LUMINAIRES




SPECIFICATION

- 5mm impact-resistant polycarbonate panel with touch-sensitive control
- 4 touch-sensitive buttons, providing ECO automatic control and 3 preset scenes (customisable at the luminaire)
- Teaching and meeting versions with buttons tailored for room applications
- Communicates wirelessly with SmartScan luminaires and SmartScan hubs
- Requires a single-gang 45mm deep back box
- Multiple touch plates can be used to provide multi-point control
- Programmable using the SmartScan Programmer **LCM 107755**


RANGE

DESCRIPTION	CAT. No.	APPROX. kg
SmartScan Touch - regular	SS 17700	0.08
SmartScan Touch - teaching	SS 17701	0.08
SmartScan Touch - meeting	SS 17702	0.08

DIMENSIONS

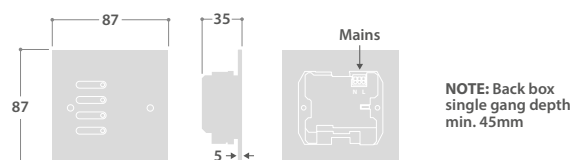


SMARTSCAN TOUCH WALL PLATE OPTIONS



regular



teaching



meeting

1 Scene 1

2 Scene 2

3 Scene 3

SmartScan Wireless Standards Compliance:

Europe: EN 300 220-1 V2.4.1 / EN 301 489-3 V1.6.1

Australasia: ACMA 2014 Radio Communication Standard 2014

Thorlux Patented Wireless Technology - GB2575724