

LUX 33

Lux 33 is LED projector for outdoor applications.

Body in black anodized aluminum machined It is available with different beam angles and colour temperature or RGB.

Stainless steel drilled brackets in order to fix and adjust the spot. The spot can be also fixed using peg for the ground.



3000K | 25°

LAMPING

Source	LED spot
Total power	14W
Emission	Direct adjustable
Tension	12VDC
Color temperature	3000K
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 90
Energy class	A+
IP class	68
Dimensions	12x10,9x16,1cm
Materials	Anodized aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Accessories	Drivers 12VDC + DALI interface, Peg, Peg
Net lamp weight	1,12 kg

Codes

BLUX0909417WAN


Structure

black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,23 kg

Certificazioni

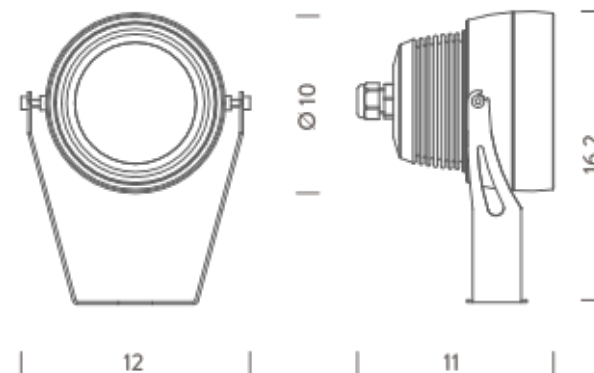

3000K | 33°

LAMPING

Source	LED spot
Total power	14W
Emission	Direct adjustable
Tension	12VDC
Color temperature	3000K
Luminous flux	980lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 90
Energy class	A+
IP class	68
Dimensions	12x10,9x16,1cm
Materials	Anodized aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Accessories	Drivers 12VDC + DALI interface, Peg, Peg
Net lamp weight	1,12 kg

Codes

BLUX0909717WAN


Structure

black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,23 kg

Certificazioni

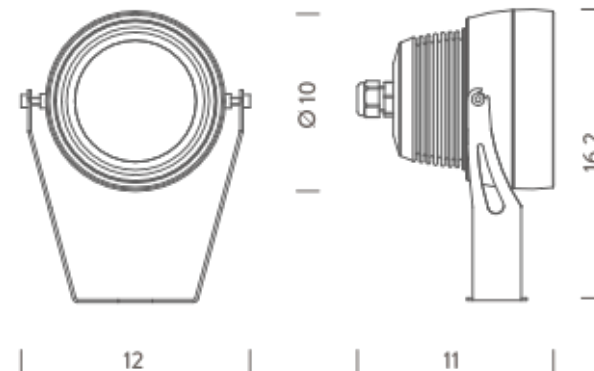

5000K | 25°

LAMPING

Source	LED spot
Total power	14W
Emission	Direct adjustable
Tension	12VDC
Color temperature	5000K
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 5
Typ CRI	> 70
Energy class	A+
IP class	68
Dimensions	12x10,9x16,1cm
Materials	Anodized aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Accessories	Drivers 12VDC + DALI interface, Peg, Peg
Net lamp weight	1,12 kg

Codes

BLUX09094170AN


Structure

black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,23 kg

Certificazioni

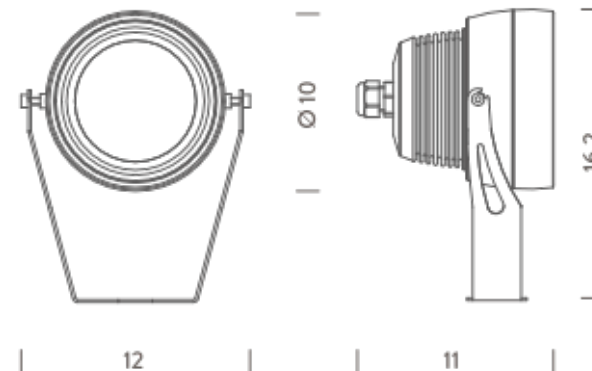

5000K | 33°

LAMPING

Source	LED spot
Total power	14W
Emission	Direct adjustable
Tension	12VDC
Color temperature	5000K
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM < 5
Typ CRI	> 70
Energy class	A+
IP class	68
Dimensions	12x10,9x16,1cm
Materials	Anodized aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Accessories	Drivers 12VDC + DALI interface, Peg, Peg
Net lamp weight	1,12 kg

Codes

BLUX09097170AN


Structure

black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,23 kg

Certificazioni

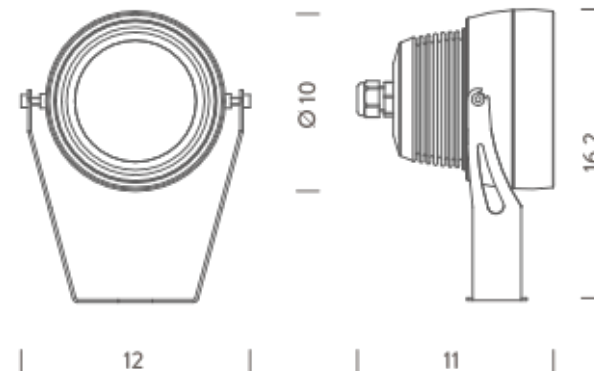

RGB | 25°

LAMPING

Source	LED spot
Total power	11W
Emission	Direct adjustable
Tension	350mA
Color temperature	RGB
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM < 3
Energy class	A+
IP class	67
Dimensions	12x10,9x16,1cm
Materials	Anodized aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included (12V for submerged applications)
Accessories	Drivers 12VDC + DALI interface, Drivers 24VDC + DALI interface, Peg, Peg
Net lamp weight	1,12 kg

Codes

BLUX09094176AN


Structure

black

PACKAGE

Package 01 Dimension: 23,5x15x11 cm / Gross weight: 1,23 kg

Certificazioni

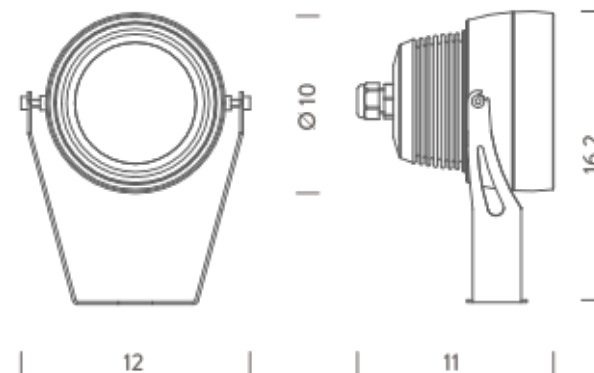

RGB | 33°

LAMPING

Source	LED spot
Total power	11W
Emission	Direct adjustable
Tension	350mA
Color temperature	RGB
Initial luminaire efficacy	39lm/W
Initial chromaticity	SDCM < 3
Energy class	A+
IP class	67
Dimensions	12x10,9x16,1cm
Materials	Anodized aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included (12V for submerged applications)
Accessories	Drivers 12VDC + DALI interface, Drivers 24VDC + DALI interface, Peg, Peg
Net lamp weight	1,12 kg

Codes

BLUX09097176AN

Structure

black

PACKAGE

Package 01

Dimension: 50x8x3 cm / Gross weight: 0,11 kg

Certificazioni

