

LUX 40

Lux 40 is a LED spot for outdoor applications.

Black anodized aluminum and brass bracket to install the spot and adjust it. It can be installed using peg for the ground. It is available with different beam angles and colour temperatures.



3000K | 11°

LAMPING

Source	LED spot
Total power	2W
Emission	Direct adjustable
Tension	700mA
Color temperature	3000K
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	A+
IP class	68
Dimensions	ø3,5x8,9x7,6cm
Materials	Anodized aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Accessories	Drivers 700mA, Fastening, Fastening Peg, Peg
Net lamp weight	0,24 kg

Codes

BLUX0901F17WNE


Structure

black

PACKAGE

Package 01 Dimension: 11,5x11x8 cm / Gross weight: 0,3 kg

Certificazioni

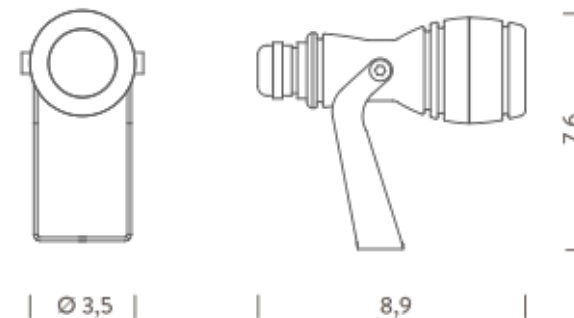

3000K | 25°

LAMPING

Source	LED spot
Total power	2W
Emission	Direct adjustable
Tension	700mA
Color temperature	3000K
Luminous flux	140lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	A+
IP class	68
Dimensions	ø3,5x8,9x7,6cm
Materials	Anodized aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Accessories	Drivers 700mA, Fastening, Fastening Peg, Peg
Net lamp weight	0,24 kg

Codes

BLUX0901417WNE


Structure

black

PACKAGE

Package 01 Dimension: 11,5x11x8 cm / Gross weight: 0,3 kg

Certificazioni

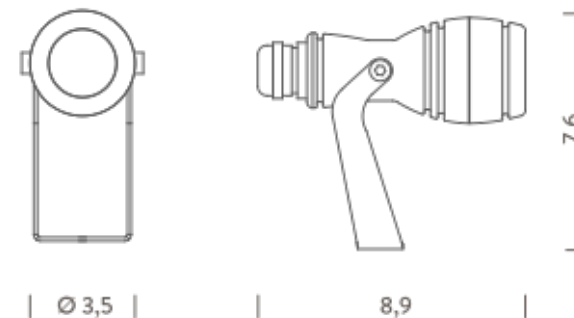

3000K | 46°

LAMPING

Source	LED spot
Total power	2W
Emission	Direct adjustable
Tension	700mA
Color temperature	3000K
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	A+
IP class	68
Dimensions	ø3,5x8,9x7,6cm
Materials	Anodized aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Accessories	Drivers 700mA, Fastening, Fastening Peg, Peg
Net lamp weight	0,24 kg

Codes

BLUX0901717WNE


Structure

black

PACKAGE

Package 01 Dimension: 11,5x11x8 cm / Gross weight: 0,3 kg

Certificazioni

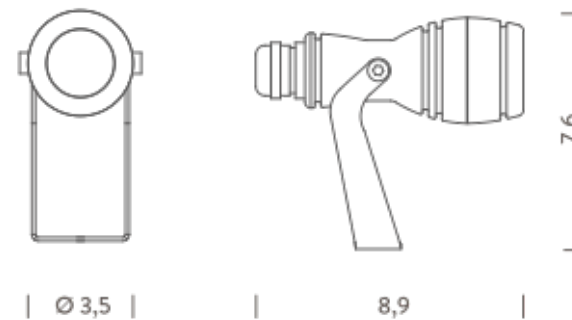

4000K | 11°

LAMPING

Source	LED spot
Total power	2W
Emission	Direct adjustable
Tension	700mA
Color temperature	4000K
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	68
Dimensions	ø3,5x8,9x7,6cm
Materials	Anodized aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Accessories	Drivers 700mA, Fastening, Fastening Peg, Peg
Net lamp weight	0,24 kg

Codes

BLUX0901F17NNE


Structure

black

PACKAGE

Package 01 Dimension: 11,5x11x8 cm / Gross weight: 0,3 kg

Certificazioni

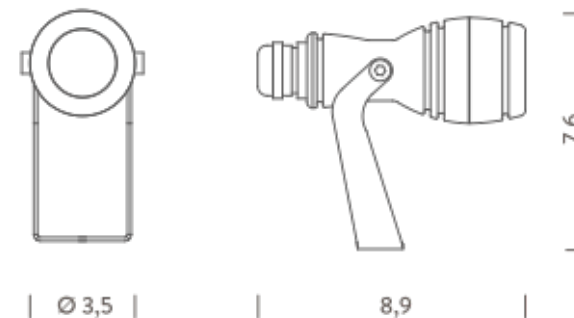

4000K | 25°

LAMPING

Source	LED spot
Total power	2W
Emission	Direct adjustable
Tension	700mA
Color temperature	4000K
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	68
Dimensions	ø3,5x8,9x7,6cm
Materials	Anodized aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Accessories	Drivers 700mA, Fastening, Fastening Peg, Peg
Net lamp weight	0,24 kg

Codes

BLUX0901417NNE


Structure

black

PACKAGE

Package 01 Dimension: 11,5x11x8 cm / Gross weight: 0,3 kg

Certificazioni

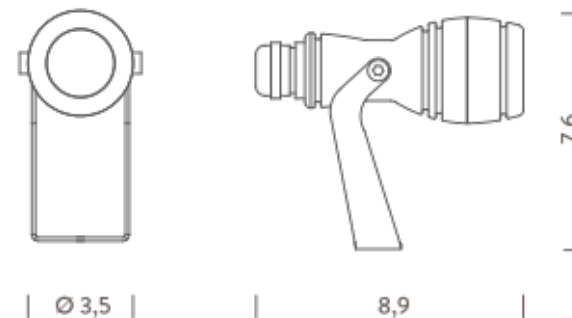

4000K | 46°

LAMPING

Source	LED spot
Total power	2W
Emission	Direct adjustable
Tension	700mA
Color temperature	4000K
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	68
Dimensions	ø3,5x8,9x7,6cm
Materials	Anodized aluminum
Ambient temperature range	-20°C / 35°C
Performance ambient temperature	25°C
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Accessories	Drivers 700mA, Fastening, Fastening Peg, Peg
Net lamp weight	0,24 kg

Codes

BLUX0901717NNE

Structure

black

PACKAGE

Package 01 Dimension: 15x10x9,5 cm / Gross weight: 0,4 kg

Certificazioni

