

MINIFLUX TRANSPARENT

MINIFLUX is a modular LED system for indoor / outdoor suitable for cornice, decorative and accent lighting.

High-emission LED strip (24V DC) installed in an aluminium profile.

Clear polycarbonate diffuser.

Installation is realised through transparent polycarbonate clips that are adjusted for the customer's needs.

Miniflux can be supplied in numerous lengths and colour temperatures.

Tube diameter dimensions depend on the lamp's luminous flux.

LED driver not included.



1M | 2700K HP

LAMPING

Source	Linear LED
Total power	16W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	1486lm
Initial luminaire efficacy	> 93lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	∅1,6x104cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,25 kg

Codes

BBOK0910007DPC

Structure

transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg

Certificazioni




NEMO
STUDIO

HP - 120°/ASYMMETRIC



HP PLUS

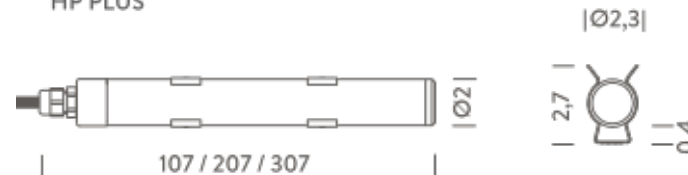

1M | 3000K HP

LAMPING

Source	Linear LED
Total power	16W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1486lm
Initial luminaire efficacy	> 93lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x104cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,25 kg

Codes

BBOK0910007WPC

Structure

transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg

Certificazioni




NEMO_{STUDIO}

HP - 120°/ASYMMETRIC



HP PLUS

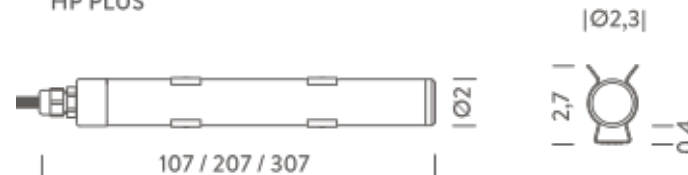

1M | 3000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	16W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1386lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,25 kg

Codes

BBOK0910207WPC

Structure

transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg

Certificazioni




NEMO_{STUDIO}

HP - 120°/ASYMMETRIC



HP PLUS

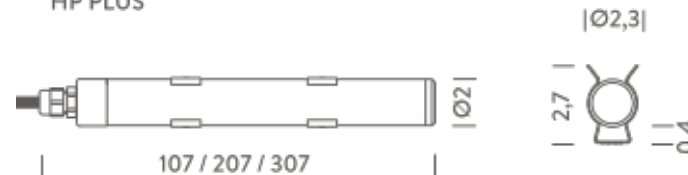

1M | 4000K HP

LAMPING

Source	Linear LED
Total power	16W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1512lm
Initial luminaire efficacy	95lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x104cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,25 kg

Codes

BBOK0910007NPC

Structure

transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg

Certificazioni




NEMO STUDIO

HP - 120°/ASYMMETRIC



HP PLUS

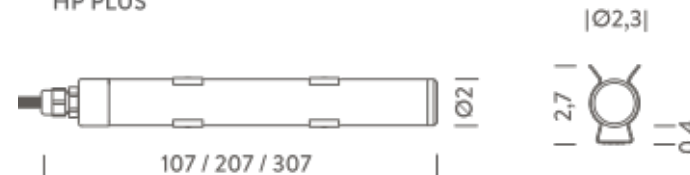

1M | 4000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	16W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1386lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cabale 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,25 kg

Codes

BBOK0910207NPC

Structure

transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,35 kg

Certificazioni




NEMO_{STUDIO}

HP - 120°/ASYMMETRIC



HP PLUS

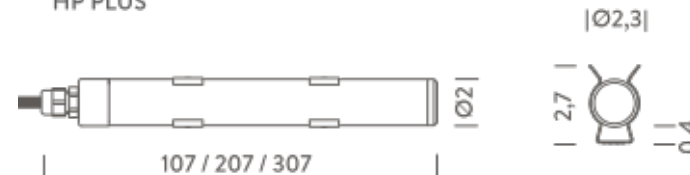

2M | 2700K HP

LAMPING

Source	Linear LED
Total power	32W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	2972lm
Initial luminaire efficacy	93lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x204cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,5 kg

Codes

BBOK0920007DPC

Structure

transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

Certificazioni




NEMO_{STUDIO}

HP - 120°/ASYMMETRIC



HP PLUS

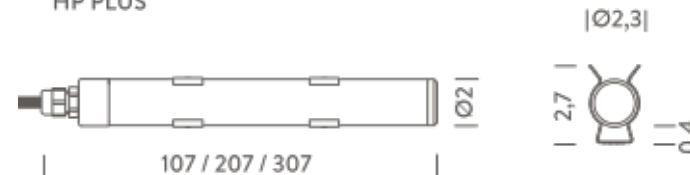

2M | 3000K HP

LAMPING

Source	Linear LED
Total power	32W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2972lm
Initial luminaire efficacy	93lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x204cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,50 kg

Codes

BBOK0920007WPC

Structure

transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

Certificazioni




NEMO_{STUDIO}

HP - 120°/ASYMMETRIC



HP PLUS

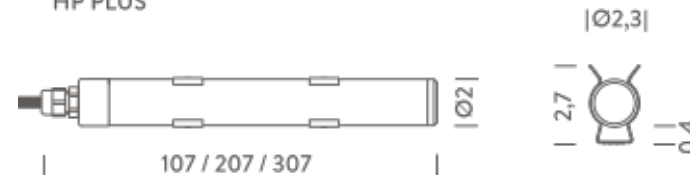

2M | 3000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	32W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2772lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,50 kg

Codes

BBOK0920207WPC

Structure

transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

Certificazioni




NEMO_{STUDIO}

HP - 120°/ASYMMETRIC



HP PLUS

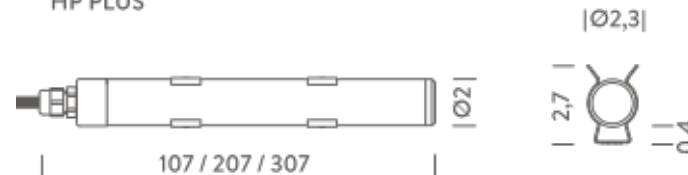

2M | 4000K HP

LAMPING

Source	Linear LED
Total power	32W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3024lm
Initial luminaire efficacy	95lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x204cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,50 kg

Codes

BBOK0920007NPC

Structure

transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

Certificazioni




NEMO_{STUDIO}

HP - 120°/ASYMMETRIC



HP PLUS

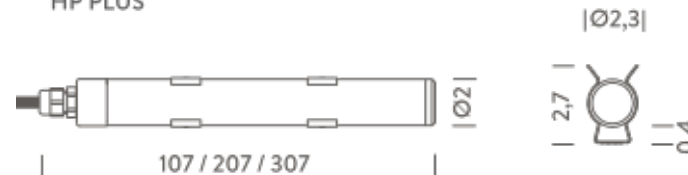

2M | 4000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	32W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2772lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cabale 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,50 kg

Codes

BBOK0920207NPC

Structure

transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,62 kg

Certificazioni




NEMO_{STUDIO}

HP - 120°/ASYMMETRIC



HP PLUS

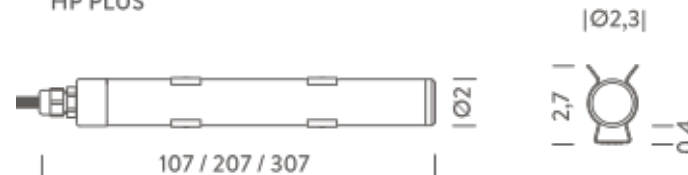

3M | 2700K HP

LAMPING

Source	Linear LED
Total power	48W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	4458lm
Initial luminaire efficacy	93lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x304cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,75 kg

Codes

BBOK0930007DPC

Structure

transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg

Certificazioni




NEMO_{STUDIO}

HP - 120°/ASYMMETRIC



HP PLUS

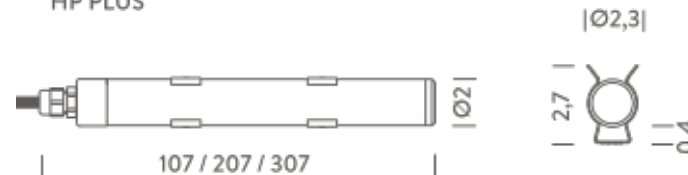

3M | 3000K HP

LAMPING

Source	Linear LED
Total power	48W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	4458lm
Initial luminaire efficacy	93lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x304cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,75 kg

Codes

BBOK0930007WPC

Structure

transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg

Certificazioni




NEMO
STUDIO

HP - 120°/ASYMMETRIC



HP PLUS

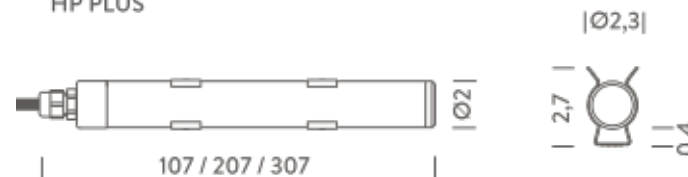

3M | 3000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	48W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	4158lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cabale 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,75 kg

Codes

BBOK0930207WPC

Structure

transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg

Certificazioni




NEMO_{STUDIO}

HP - 120°/ASYMMETRIC



HP PLUS

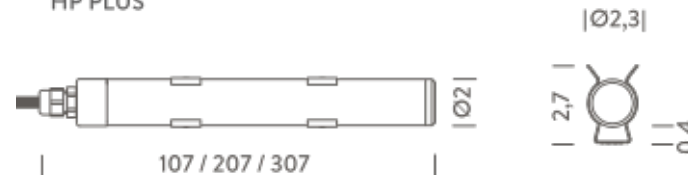

3M | 4000K HP

LAMPING

Source	Linear LED
Total power	48W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	4536lm
Initial luminaire efficacy	95lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø1,6x304cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,75 kg

Codes

BBOK0930007NPC

Structure

transparent

PACKAGE

Package 01


Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg

Certificazioni




NEMO_{STUDIO}

HP - 120°/ASYMMETRIC

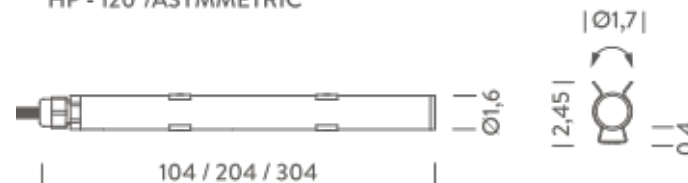

HP PLUS

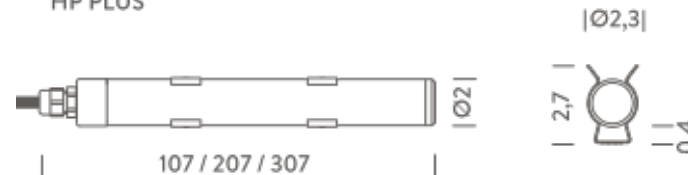

3M | 4000K HP - ASYMMETRIC

LAMPING

Source	Linear LED
Total power	48W
Emission	Direct asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	4158lm
Initial luminaire efficacy	87lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface, Miniflux accessories, joint, PG, feeding, end-cap
Net lamp weight	0,75 kg

Codes

BBOK0930207NPC

Structure

transparent

PACKAGE

Package 01


Dimension: 320x8,5x4 cm / Gross weight: 0,95 kg

Certificazioni




NEMO STUDIO

HP - 120°/ASYMMETRIC

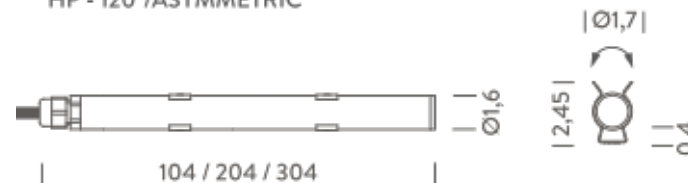

HP PLUS

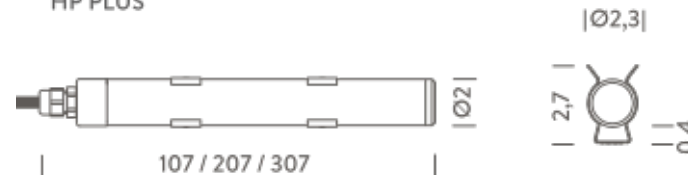

1M HP PLUS | 3000K

LAMPING

Source	Linear LED
Total power	20W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2600lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cabale 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,30 kg

Codes

BBOK0910015WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,40 kg

Certificazioni

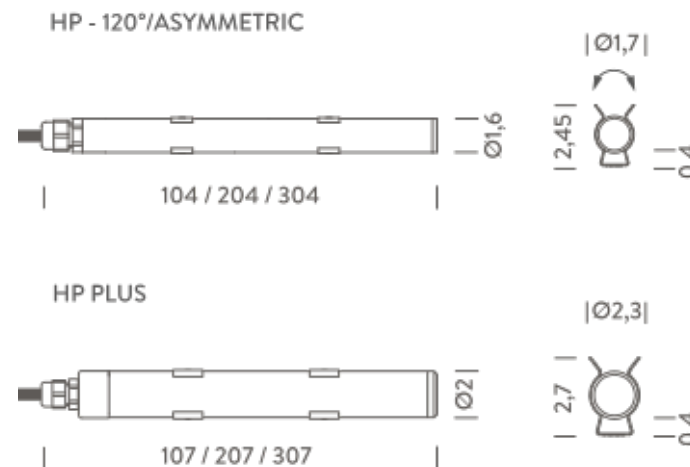

1M HP PLUS | 4000K

LAMPING

Source	Linear LED
Total power	20W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2600lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x107cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,30 kg

Codes

BBOK0910015NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,40 kg

Certificazioni

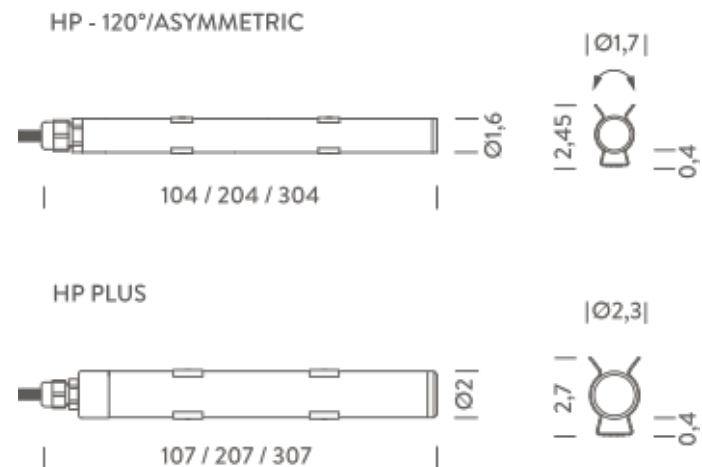

2M HP PLUS | 3000K

LAMPING

Source	Linear LED
Total power	40W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	5200lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	∅2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,60 kg

Codes

BBOK0920015WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

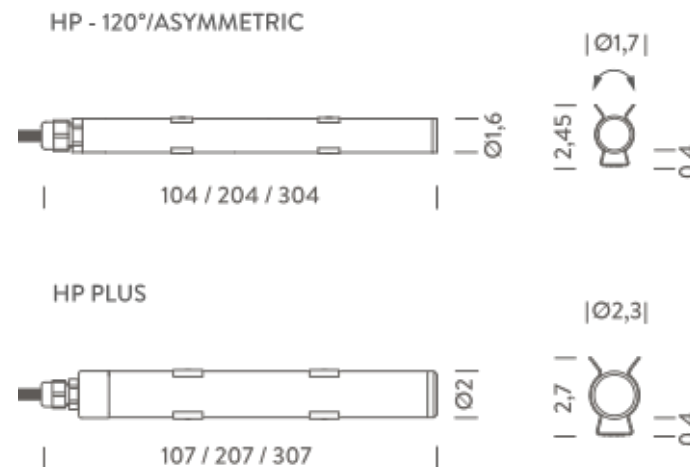

2M HP PLUS | 4000K

LAMPING

Source	Linear LED
Total power	40W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	5200lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x207cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,60 kg

Codes

BBOK0920015NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

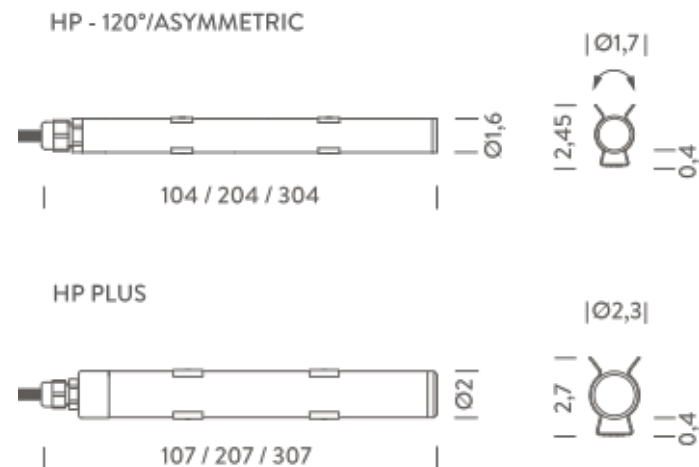

3M HP PLUS | 3000K

LAMPING

Source	Linear LED
Total power	60W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	7800lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cabale 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,90 kg

Codes

BBOK0930015WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 1,10 kg

Certificazioni

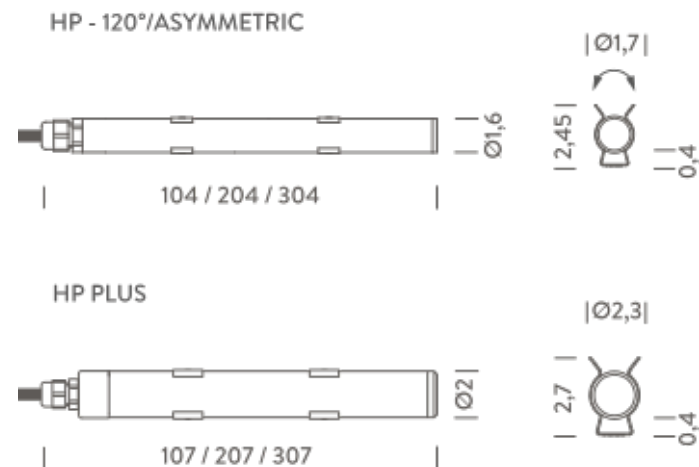

3M HP PLUS | 4000K

LAMPING

Source	Linear LED
Total power	60W
Emission	Direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	7800lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
Energy class	A+
IP class	65
Dimensions	ø2x307cm
Materials	Polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	cable 2m; driver not included
Customization options	CCT 2700K, tube length, 1-10V, DALI, DMX, Casambi
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,90 kg

Codes

BBOK0930015NPC

Structure

transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 1,10 kg

Certificazioni

