

RIGA OPAL

RIGA is a product family with a selection of flexible LED strips for outdoor use, particularly suitable for decorative lighting. Riga is composed by a 24V LED strip embedded in a white PVC profile and encapsulated in a opal polyurethane resin, extremely resistable to any weather condition and with an excellent stability against UV rays. It emits light either from the front or the side dependent on the curvature of LED strip.

Riga is available in various standard lengths.

The installation can be done with clips (included).



1M | 2800K - 3D

LAMPING

Source	Flexible linear LED
Total power	8W
Emission	Diffused orientable
Tension	24VDC
Color temperature	2800K
Luminous flux	500lm/m
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 80
Energy class	A+
IP class	67
Dimensions	1,5x1,5x100cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,3 kg

Codes

MRIG0910G55D3D

Structure

opal white

PACKAGE


Package 01

Dimension: 38x38x4 cm / Gross weight: 0,8 kg

Certificazioni




RIGA OPAL

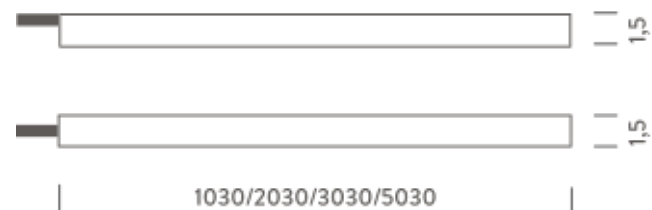


BRACKETS (included)



RIGA OPAL 3D

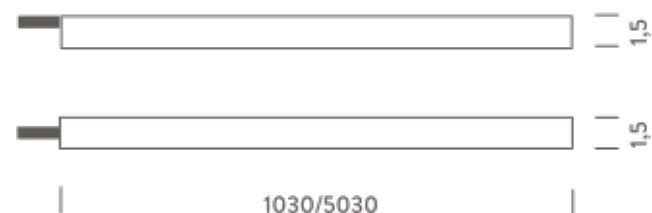

BRACKETS (included)



1M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	510lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x100mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35WFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,47 kg

Certificazioni




RIGA OPAL

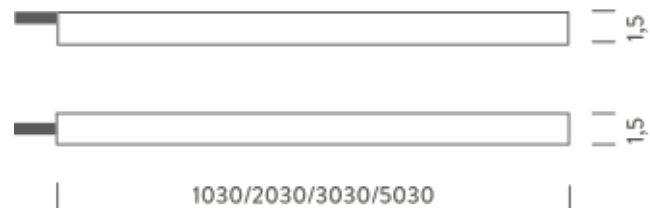


BRACKETS (included)



RIGA OPAL 3D

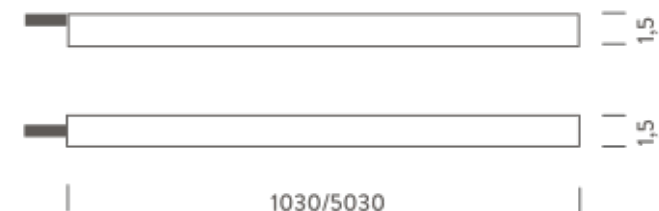

BRACKETS (included)



1M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	510lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x100mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35WSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,47 kg

Certificazioni




RIGA OPAL

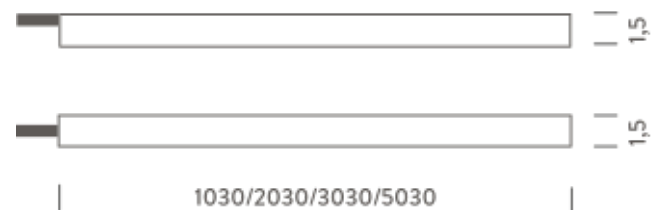

BRACKETS (included)



RIGA OPAL 3D

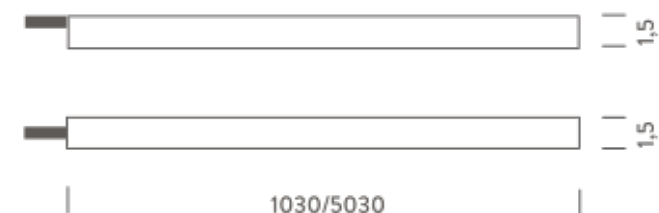

BRACKETS (included)



1M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	600lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x100mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35NFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,47 kg

Certificazioni




RIGA OPAL

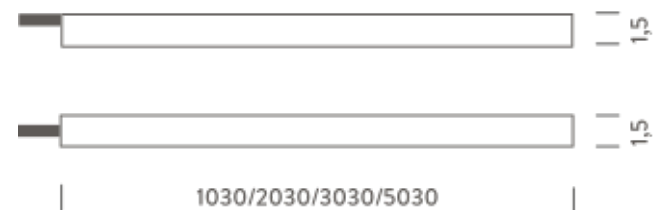

BRACKETS (included)



RIGA OPAL 3D

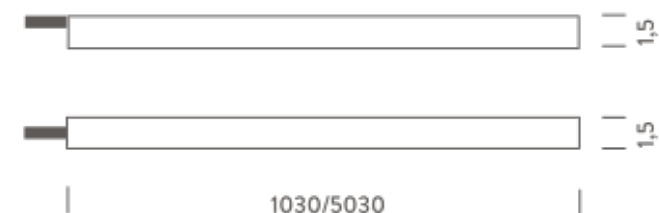

BRACKETS (included)



1M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	600lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x100mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

Codes

MRIG0910G35NSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,47 kg

Certificazioni




RIGA OPAL

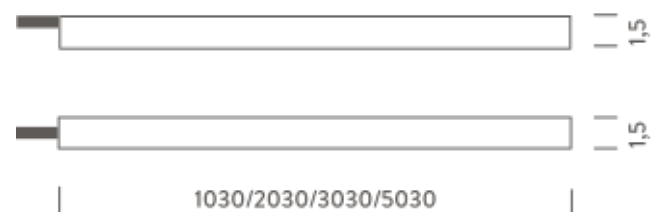


BRACKETS (included)



RIGA OPAL 3D

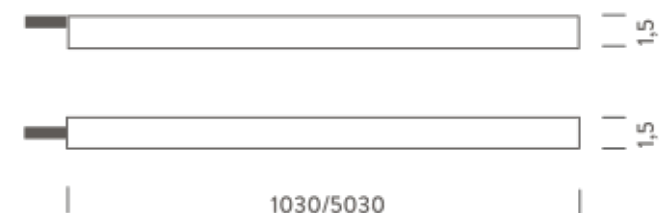

BRACKETS (included)



1M | 4400K - 3D

LAMPING

Source	Flexible linear LED
Total power	8W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4400K
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 2
Typ CRI	> 80
Energy class	A+
IP class	67
Dimensions	1,5x1,5x100cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 50°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included coloured LED, lengths
Customization options	
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,3 kg

Codes

MRIG0910G55N3D

Structure

opal white


PACKAGE

Package 01 Dimension: 38x38x4 cm / Gross weight: 0,8 kg

Certificazioni




RIGA OPAL

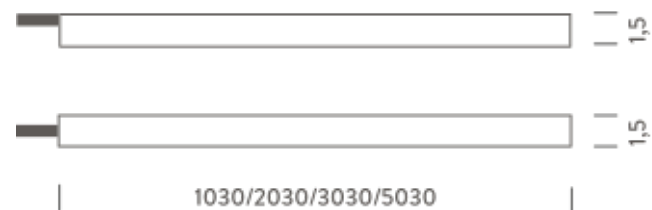

BRACKETS (included)



RIGA OPAL 3D

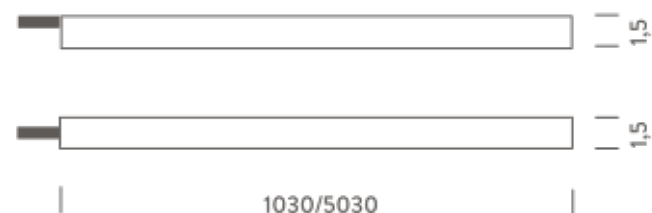

BRACKETS (included)



2M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	1020lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x200mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35WFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

Certificazioni




RIGA OPAL

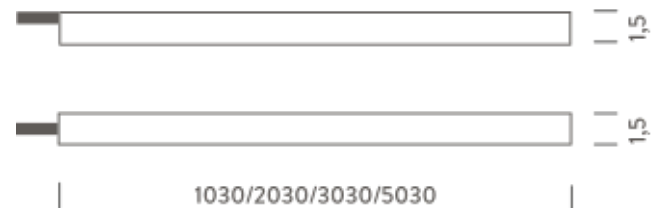


BRACKETS (included)



RIGA OPAL 3D

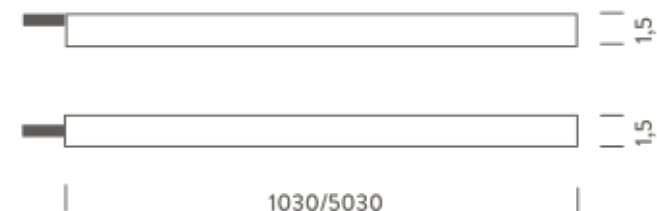

BRACKETS (included)



2M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	1020lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x200mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35WSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

Certificazioni




RIGA OPAL

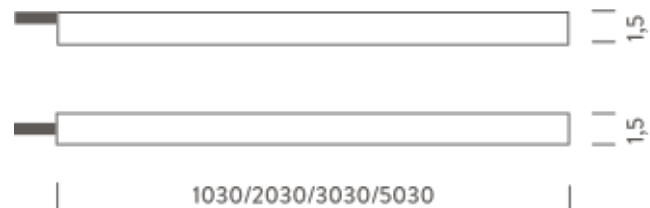


BRACKETS (included)



RIGA OPAL 3D

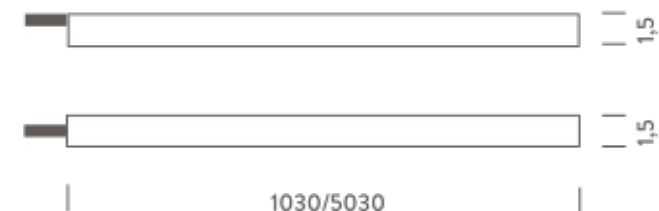

BRACKETS (included)



2M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x200mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35NFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

Certificazioni




RIGA OPAL

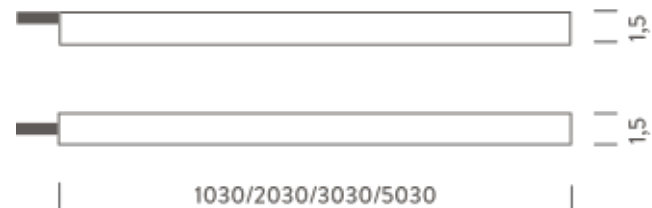


BRACKETS (included)



RIGA OPAL 3D

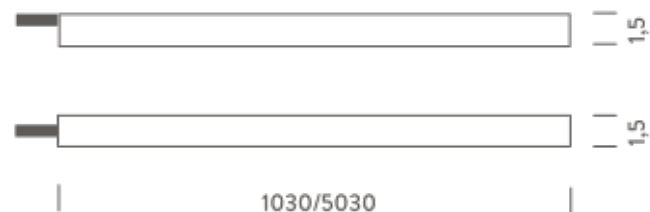

BRACKETS (included)



2M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x200mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

Codes

MRIG0920G35NSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

Certificazioni




RIGA OPAL

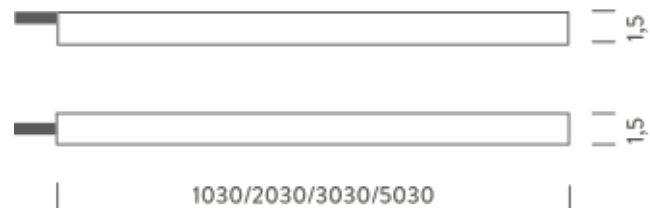


BRACKETS (included)



RIGA OPAL 3D

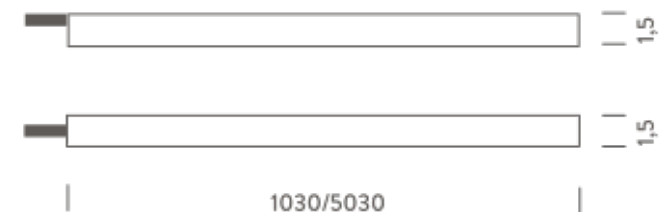

BRACKETS (included)



3M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	1530lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x300mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35WFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni




RIGA OPAL

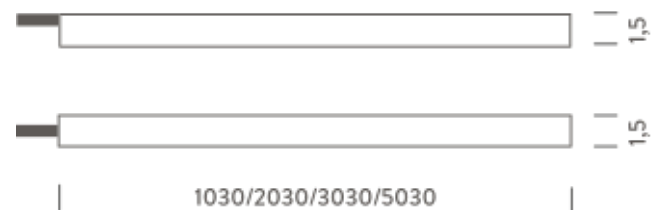


BRACKETS (included)



RIGA OPAL 3D

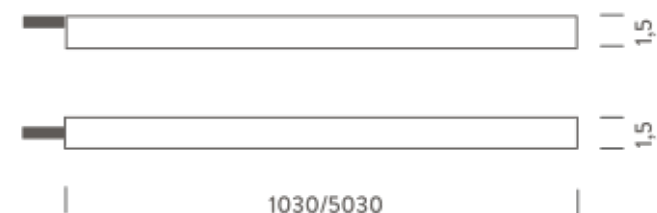

BRACKETS (included)



3M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	1530lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x300mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35WSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni




RIGA OPAL

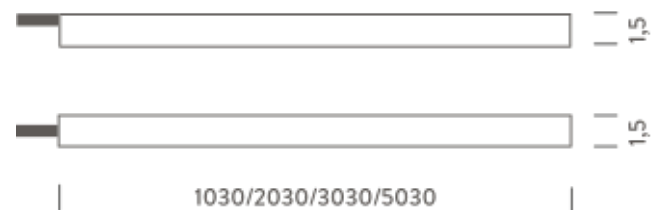


BRACKETS (included)



RIGA OPAL 3D

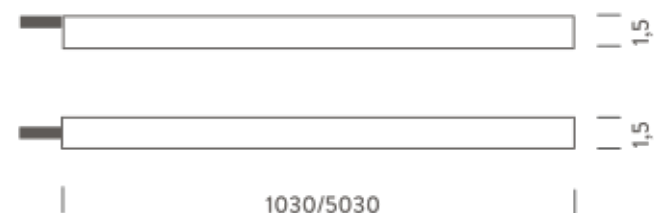

BRACKETS (included)



3M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	1800lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x300mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35NFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

Certificazioni




RIGA OPAL

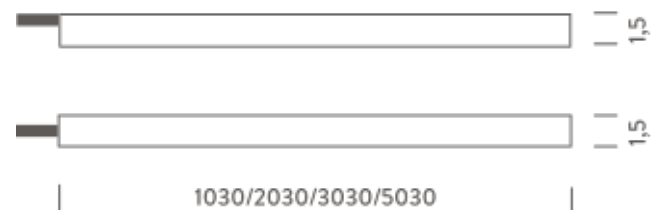


BRACKETS (included)



RIGA OPAL 3D

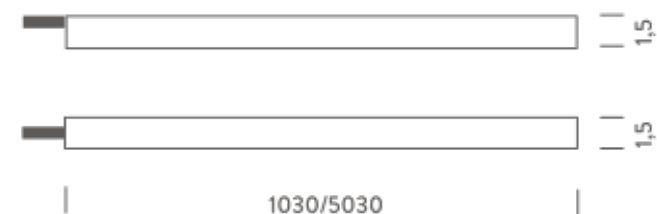

BRACKETS (included)



3M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	1800lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x300mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

Codes

MRIG0930G35NSL

Structure


white

PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg


Certificazioni

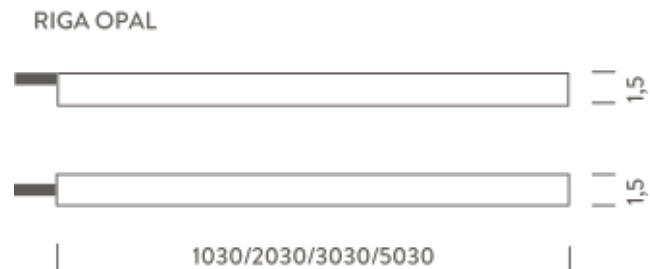


BRACKETS (included)



RIGA OPAL 3D

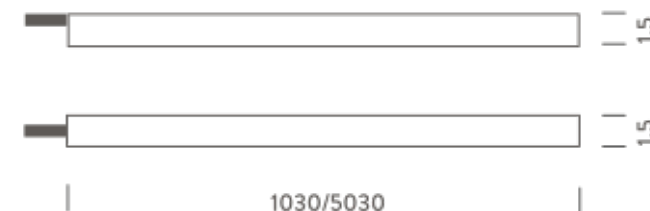

BRACKETS (included)



4M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	2040lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x400mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,78 kg

Codes

MRIG0940G35WFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni




RIGA OPAL

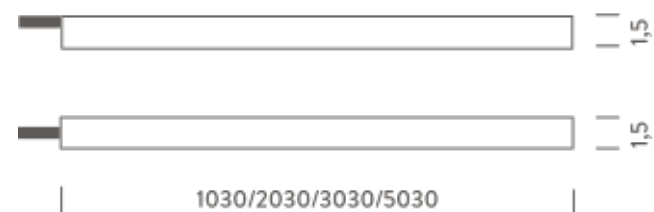


BRACKETS (included)



RIGA OPAL 3D

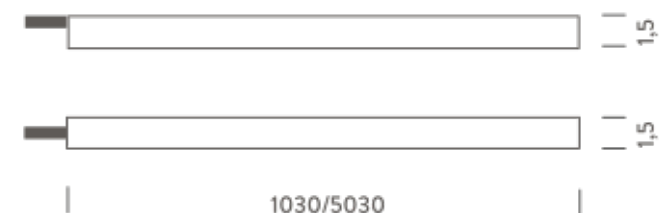

BRACKETS (included)



4M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	2040lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x400mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,78 kg

Codes

MRIG0940G35WSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni




RIGA OPAL

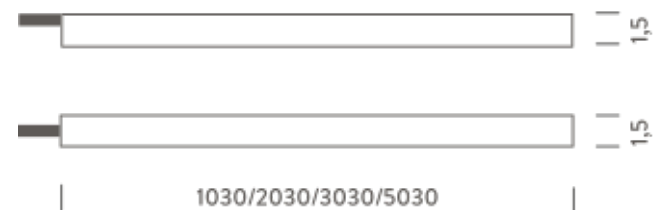

BRACKETS (included)



RIGA OPAL 3D

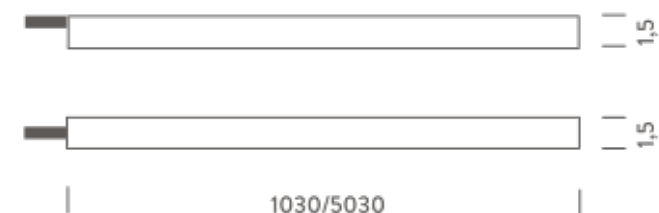

BRACKETS (included)



4M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	2400lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x400mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,78 kg

Codes

MRIG0940G35NFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni




RIGA OPAL

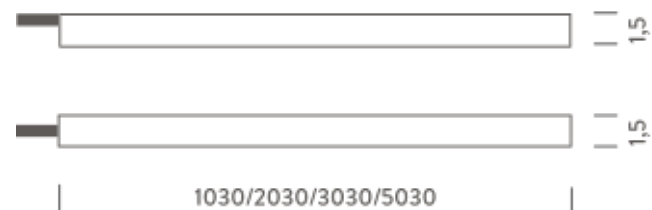


BRACKETS (included)



RIGA OPAL 3D

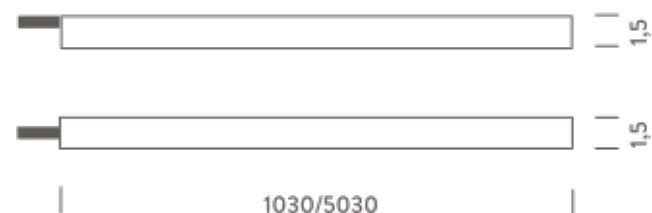

BRACKETS (included)



4M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	2400lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x400mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,78 kg

Codes

MRIG0940G35NSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni




RIGA OPAL

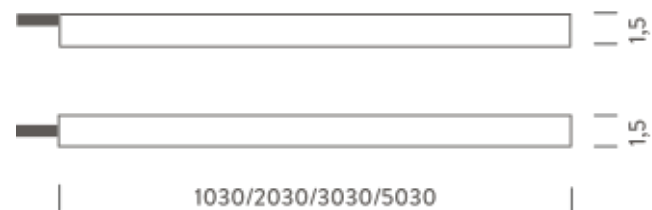


BRACKETS (included)



RIGA OPAL 3D

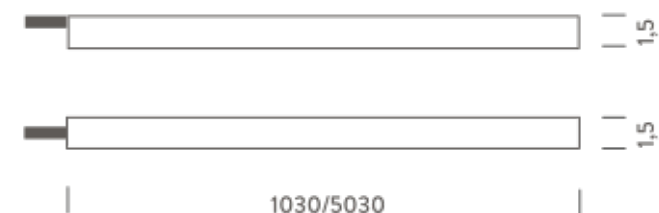

BRACKETS (included)



5M | 2800K - 3D

LAMPING

Source	Flexible linear LED
Total power	40W
Emission	Diffused orientable
Tension	24VDC
Color temperature	2800K
Luminous flux	500lm/m
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	> 80
Energy class	A+
IP class	67
Dimensions	1,5x1,5x500cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,4 kg

Codes

MRIG0950G55D3D

Structure

opal white

PACKAGE


Package 01

Dimension: 38x38x4 cm / Gross weight: 1 kg

Certificazioni




RIGA OPAL

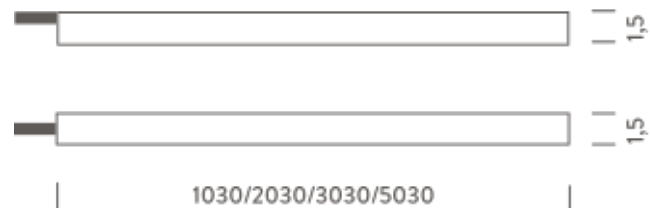


BRACKETS (included)



RIGA OPAL 3D

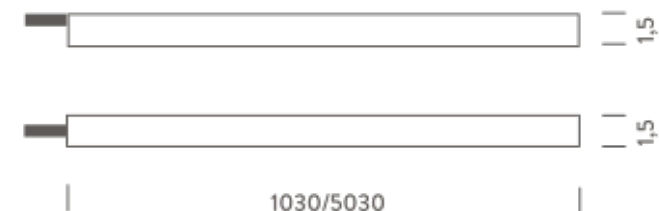

BRACKETS (included)



5M | 3000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	2550lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x500mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35WFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

Certificazioni




RIGA OPAL

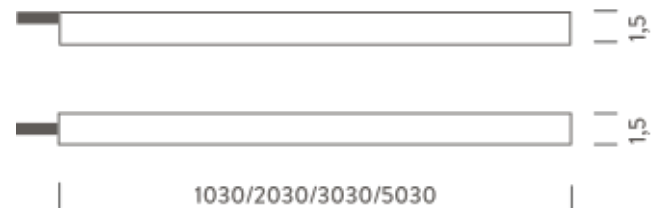


BRACKETS (included)



RIGA OPAL 3D

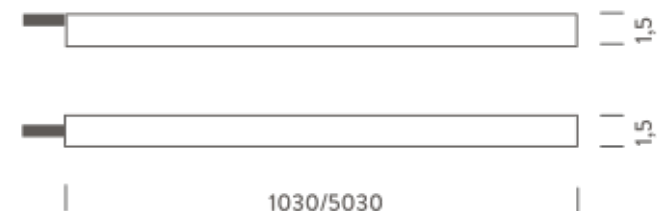

BRACKETS (included)



5M | 3000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Diffused orientable
Tension	24VDC
Color temperature	3000K
Luminous flux	2550lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x500mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35WSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

Certificazioni




RIGA OPAL

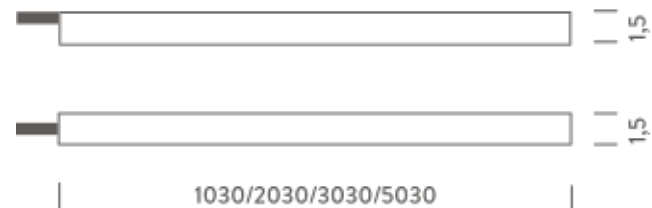

BRACKETS (included)



RIGA OPAL 3D

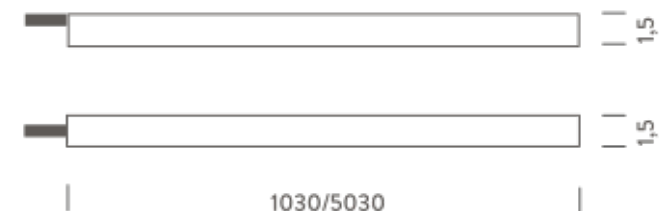

BRACKETS (included)



5M | 4000K - FRONT LIGHT

LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	3000lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x500mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35NFL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

Certificazioni




RIGA OPAL

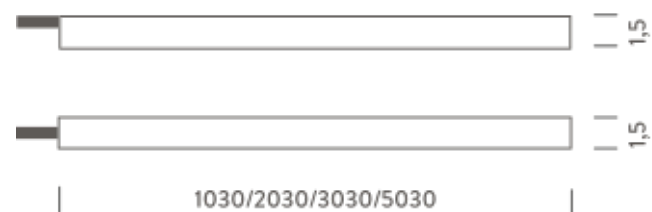


BRACKETS (included)



RIGA OPAL 3D

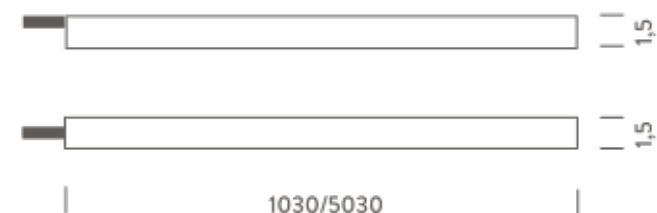

BRACKETS (included)



5M | 4000K - SIDE LIGHT

LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4000K
Luminous flux	3000lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x1,5x500mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

Codes

MRIG0950G35NSL

Structure

white

PACKAGE


Package 01

Dimension: 42x42x4,5 cm / Gross weight: 2,38 kg

Certificazioni




RIGA OPAL

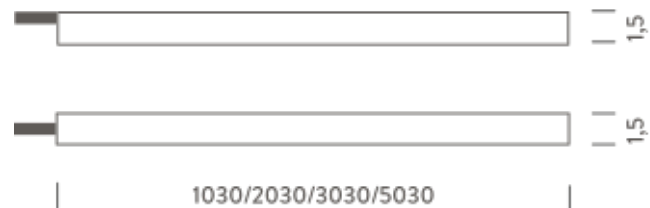


BRACKETS (included)



RIGA OPAL 3D

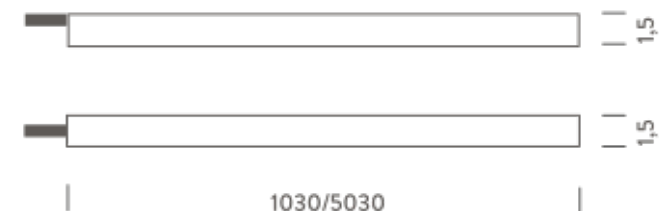

BRACKETS (included)



5M | 4400K - 3D

LAMPING

Source	Flexible linear LED
Total power	40W
Emission	Diffused orientable
Tension	24VDC
Color temperature	4400K
Luminous flux	500lm/m
Initial luminaire efficacy	96lm/W
Initial chromaticity	SDCM < 2
Typ CRI	> 80
Energy class	A+
IP class	67
Dimensions	1,5x1,5x500cm
Materials	Resin + PVC
Ambient temperature range	- 20° / 50°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	coloured LED, lengths
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,4 kg

Codes

MRIG0950G55N3D

Structure

opal white

PACKAGE


Package 01

Dimension: 38x38x4 cm / Gross weight: 1 kg

Certificazioni




RIGA OPAL

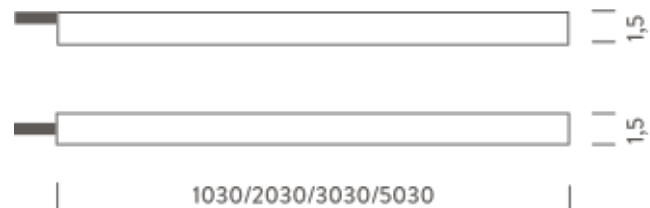

BRACKETS (included)



RIGA OPAL 3D

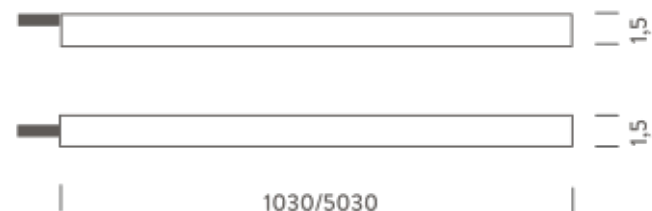

BRACKETS (included)

