

# RIGA TRANSPARENT

RIGA is a product family with a selection of flexible LED strips for outdoor use, particularly suitable for decorative lighting. Riga is composed by a 24V LED strip embedded in a white PVC profile and encapsulated in a transparent polyurethane resin, extremely resistant to any weather condition and with an excellent stability against UV rays. The transparent resin version emits frontal light. Riga is available in various standard lengths. The installation can be done with clips (included).



1M | 2700K

## LAMPING

Source	Flexible linear LED
Total power	9,6W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	1400lm
Initial luminaire efficacy	150lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x0,7x100mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,21 kg

## Codes

MRIG0910035DRE

## Structure


white

## PACKAGE

Package 01

Dimension: 22x19x8 cm / Gross weight: 0,81 kg

## Certificazioni

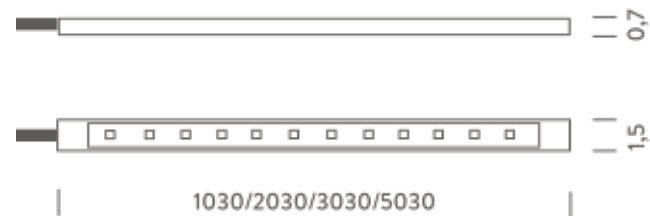

## BRACKETS (included)



2M | 2700K

## LAMPING

Source	Flexible linear LED
Total power	19,2W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	2800lm
Initial luminaire efficacy	150lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x0,7x200mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,48 kg

## Codes

MRIG0920035DRE

## Structure

white

## PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 0,84 kg

## Certificazioni



## BRACKETS (included)



## 3M | 2700K

### LAMPING

Source	Flexible linear LED
Total power	28,8W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	4200lm
Initial luminaire efficacy	150lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x0,7x300mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

### Codes

MRIG0930035DRE

### Structure

white

### PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,08 kg

### Certificazioni



### BRACKETS (included)



4M | 2700K

## LAMPING

Source	Flexible linear LED
Total power	38,4W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	5600lm
Initial luminaire efficacy	150lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x0,7x400mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,96 kg

## Codes

MRIG0940035DRE

## Structure

white

## PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,32 kg

## Certificazioni



## BRACKETS (included)



## 5M | 2700K

### LAMPING

Source	Flexible linear LED
Total power	48W
Emission	Direct 120°
Tension	24VDC
Color temperature	2700K
Luminous flux	7000lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 3
Typ CRI	85
Energy class	A+
IP class	68
Dimensions	1,5x0,7x500mm
Materials	Resin + PVC
Ambient temperature range	- 20° / 55°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 2m; driver not included
Customization options	Lengths
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,2 kg

### Codes

MRIG0950035DRE

### Structure

white

### PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

### Certificazioni



### BRACKETS (included)

