

SHARP ZOOM

SHARP ZOOM is a LED projector suitable for accent lighting in indoor applications. Adjustment of the mechanic frontal to alter the optic beam from 7° to 55°. Composed of an aluminium body and a plastic track adapter and available in three colour temperatures. Varnished white (with grey details) or black anodized aluminum finishes. ZOOM has an on-board dimmer and an integrated driver.



2700K - 1-10V

LAMPING

Source	LED spot
Total power	25W
Emission	Direct adjustable 7°-55°
Switching	dimnable 1-10V
Tension	220/240V
Color temperature	2700K
Luminous flux	1546lm (55°)
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 2
Typ CRI	> 94
Energy class	A+
IP class	20
Dimensions	26,5x29,2x9cm
Materials	Aluminum + polycarbonate
Ambient temperature range	0° / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK02
Notes	track connector 3C
Customization options	CRI, Temperature colour, Casambi
Accessories	Frontal lens, Linear
Net lamp weight	1,5 kg

Codes

MPFB8001929DBG
MPFB8001929DAN

Structure

white
black

PACKAGE


Package 01

Dimension: 30x28x5 cm / Gross weight: 1,8 kg

Certificazioni



NEMO
STUDIO

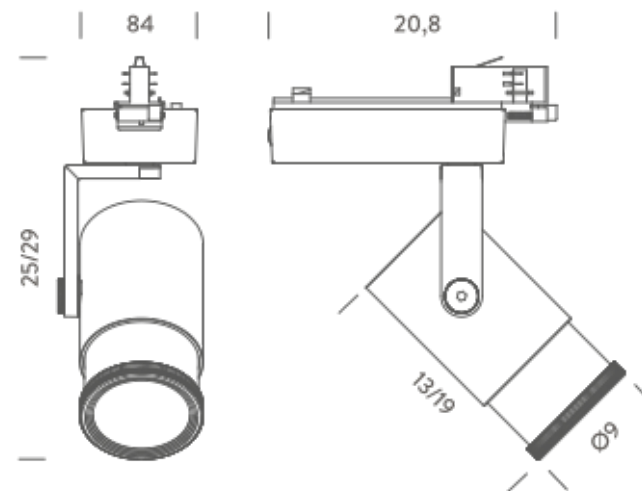

3000K - 1-10V

LAMPING

Source	LED spot
Total power	25W
Emission	Direct adjustable 7°-55°
Switching	dimnable 1-10V
Tension	220/240V
Color temperature	3000K
Luminous flux	1560lm (55°)
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 2
Typ CRI	> 94
Energy class	A+
IP class	20
Dimensions	26,5x29,2x9cm
Materials	Aluminum + polycarbonate
Ambient temperature range	0° / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK02
Notes	track connector 3C
Customization options	CRI, Temperature colour, Casambi
Accessories	Frontal lens, Linear
Net lamp weight	1,5 kg

Codes

MPFB8001929WBG
MPFB8001929WAN

Structure

white
black

PACKAGE


Package 01

Dimension: 30x28x5 cm / Gross weight: 1,8 kg

Certificazioni



NEMO
STUDIO

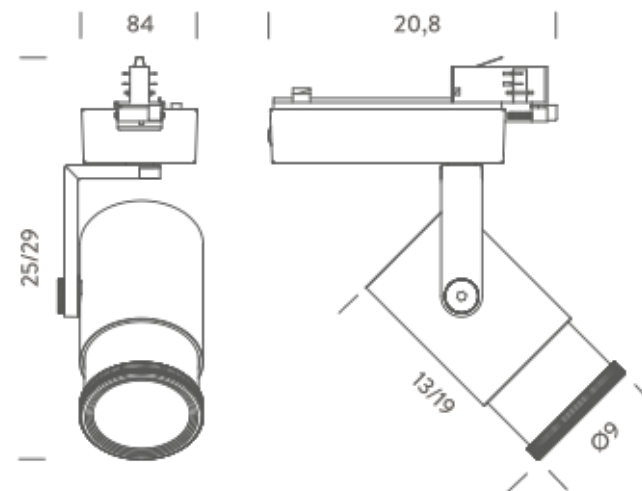

4000K - 1-10V

LAMPING

Source	LED spot
Total power	25W
Emission	Direct adjustable 7°-55°
Switching	dimnable 1-10V
Tension	220/240V
Color temperature	4000K
Luminous flux	1890lm (55°)
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 2
Typ CRI	> 94
Energy class	A+
IP class	20
Dimensions	26,5x29,2x9cm
Materials	Aluminum + polycarbonate
Ambient temperature range	0° / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK02
Notes	track connector 3C
Customization options	CRI, Temperature colour, Casambi
Accessories	Frontal lens, Linear
Net lamp weight	1,5 kg

Codes

MPFB8001929NBG
MPFB8001929NAN

Structure

white
black

PACKAGE


Package 01

Dimension: 30x28x5 cm / Gross weight: 1,8 kg

Certificazioni



NEMO
STUDIO

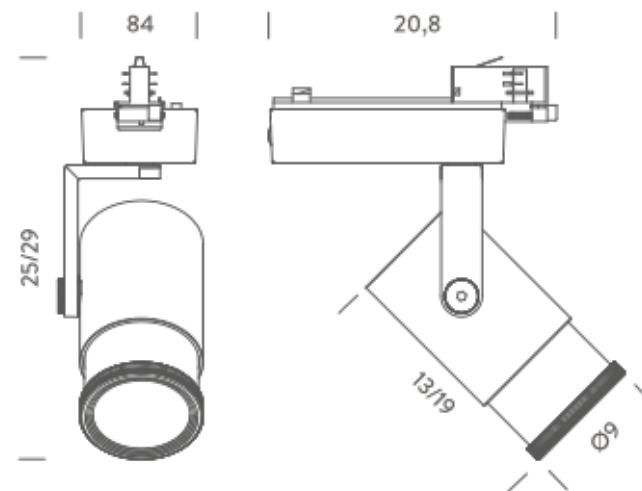

2700K - DALI

LAMPING

Source	LED spot
Total power	25W
Emission	Direct adjustable 7°-55°
Switching	DALI
Tension	220/240V
Color temperature	2700K
Luminous flux	1546lm (55°)
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 2
Typ CRI	> 94
Energy class	A+
IP class	20
Dimensions	26,5x29,2x9cm
Materials	Aluminum + polycarbonate
Ambient temperature range	0° / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK02
Notes	track connector 3C
Customization options	CRI, Temperature colour, Casambi
Accessories	Frontal lens, Linear
Net lamp weight	1,5 kg

Codes

MPFBDA01929DBG
MPFBDA01929DAN

Structure

white
black

PACKAGE


Package 01

Dimension: 30x28x5 cm / Gross weight: 1,8 kg

Certificazioni



NEMO
STUDIO

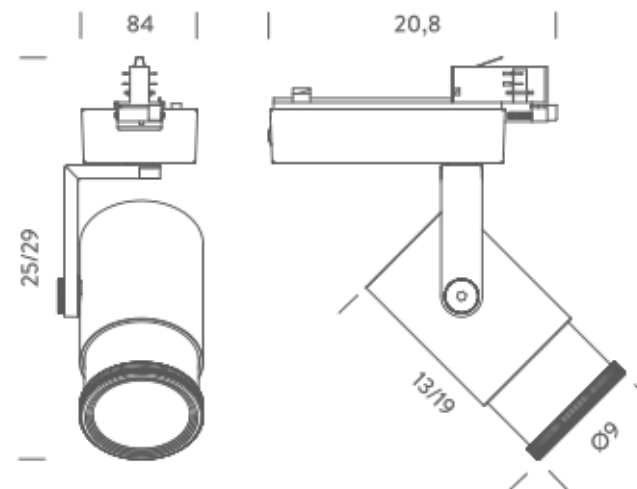

3000K - DALI

LAMPING

Source	LED spot
Total power	25W
Emission	Direct adjustable 7°-55°
Switching	DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	1560lm (55°)
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM < 2
Typ CRI	> 94
Energy class	A+
IP class	20
Dimensions	26,5x29,2x9cm
Materials	Aluminum + polycarbonate
Ambient temperature range	0° / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK02
Notes	track connector 3C
Customization options	CRI, Temperature colour, Casambi
Accessories	Frontal lens, Linear
Net lamp weight	1,5 kg

Codes

MPFBDA01929WBG
MPFBDA01929WAN

Structure

white
black

PACKAGE


Package 01

Dimension: 30x28x5 cm / Gross weight: 1,8 kg

Certificazioni



NEMO
STUDIO

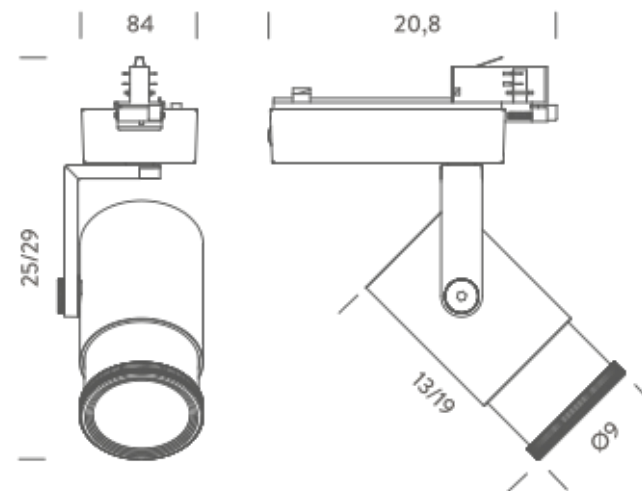

4000K - DALI

LAMPING

Source	LED spot
Total power	25W
Emission	Direct adjustable 7°-55°
Switching	DALI
Tension	220/240V
Color temperature	4000K
Luminous flux	1890lm (55°)
Initial luminaire efficacy	40lm/W
Initial chromaticity	SDCM < 2
Typ CRI	> 94
Energy class	A+
IP class	20
Dimensions	26,5x29,2x9cm
Materials	Aluminum + polycarbonate
Ambient temperature range	0° / 35°
Performance ambient temperature	25°
Mechanical impact protection code	IK02
Notes	track connector 3C
Customization options	CRI, Temperature colour, Casambi
Accessories	Frontal lens, Linear
Net lamp weight	1,5 kg

Codes

MPFBDA01929NBG
MPFBDA01929NAN

Structure

white
black

PACKAGE

Package 01

Dimension: 30x28x5 cm / Gross weight: 2,15 kg

Certificazioni



NEMO
STUDIO

